

Product Specification

Neon Flex Vertical Bending Single Color Series (Type TC)

WW-FLS102T28XX140TC-24(WCP)-XX-SE-160-XX



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

Tel : (852) 3152 3059 (10 lines)
Fax : (852) 3152 3039

China Factory :


Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China



Tel : (86) 755 8601 9190
Fax : (86) 755 8601 9197

Product Features

- High quality FPC
- Dilux self-encapsulated LED
- Light source lifetime:50K hours
- Vertical bending
- High quality silicone material
- IP65&IP54 waterproof
- Min.Bending Diameter:Φ130mm
- Single-ended power supply maximum length: 5m



Technology info

- Lighting Technology: LED
- DLS or NDLS: NDLS
- MLS or NMLS: NMLS
- Type of light source: SMD 2835
- Energy consumption KW/1000h/0.5M:7.2
- Beam angle : 120°
- Survival factor (Annex V/EU2019-2020) :90%

Harmonised Standards

EMC

- EN55015:2013+A1
- EN61547:2009
- EN60598-1:2015
- EN60598-2-20:2015
- EN62493:2015
- EN62471:2008

Parameters

Test condition:



- Surrounding temperature: 26°C.
- Test while turning on.

Neon Flex									
Neon Flex Model No.	CRI (Ra)	Rf	Rg	Typ. Power (W/M)	Max. Power (W/M)	Color	Neon Flex Color Temp.(K) Wavelength(nm)	Typ. Luminous Flux LM/M(39.3 7in)	Rated voltage
WW-FLS102T28WW140TC-24(WCP)-HR-SE-160-XX	≥80	82	96	14.4	15.84	Warm White	2500K	1040	DC24V
WW-FLS102T28WW140TC-24(WCP)-HR-SE-160-XX						Warm White	2700K	1040	DC24V
WW-FLS102T28WW140TC-24(WCP)-HR-SE-160-XX						Warm White	3000K	1040	DC24V
WW-FLS102T28NW140TC-24(WCP)-HR-SE-160-XX						Natural White	4000K	1140	DC24V
WW-FLS102T28SW140TC-24(WCP)-HR-SE-160-XX						Standard White	6000K	1140	DC24V
WW-FLS102T28WW140TC-24(WCP)-UR-SE-160-XX	≥90	90	100	14.4	15.84	Warm White	2500K	850	DC24V
WW-FLS102T28WW140TC-24(WCP)-UR-SE-160-XX						Warm White	2700K	850	DC24V
WW-FLS102T28WW140TC-24(WCP)-UR-SE-160-XX						Warm White	3000K	850	DC24V
WW-FLS102T28NW140TC-24(WCP)-UR-SE-160-XX						Natural White	4000K	900	DC24V
WW-FLS102T28SW140TC-24(WCP)-UR-SE-160-XX						Standard White	6000K	900	DC24V
WW-FLS102T28SR140TC-24(WCP)-SE-160-XX	/	/	/	14.4	15.84	Red	620-630nm	220	DC24V
WW-FLS102T28SG140TC-24(WCP)-SE-160-XX	/	/	/			Green	515-525nm	1150	DC24V
WW-FLS102T28SB140TC-24(WCP)-SE-160-XX	/	/	/			Blue	465-475nm	220	DC24V
WW-FLS102T28AY140TC-24(WCP)-SE-160-XX	/	/	/			Yellow	585-595nm	260	DC24V


- SDCM for light source: ≤6 (alternative ≤3).
- The typ. Luminous flux tolerance range is ±10% (subject to the manufacturer's instrument test).

Optical Test Diagram

Neon Flex

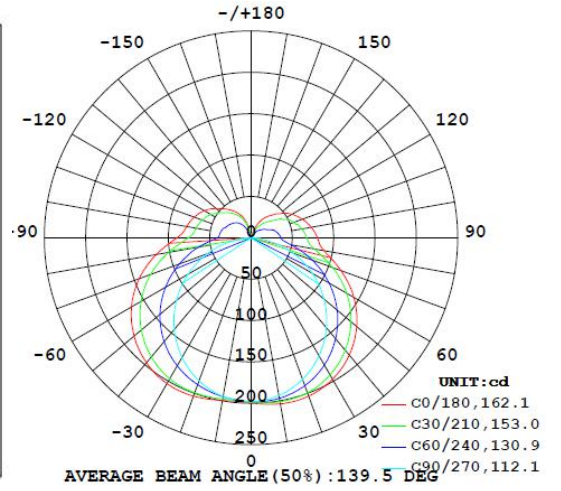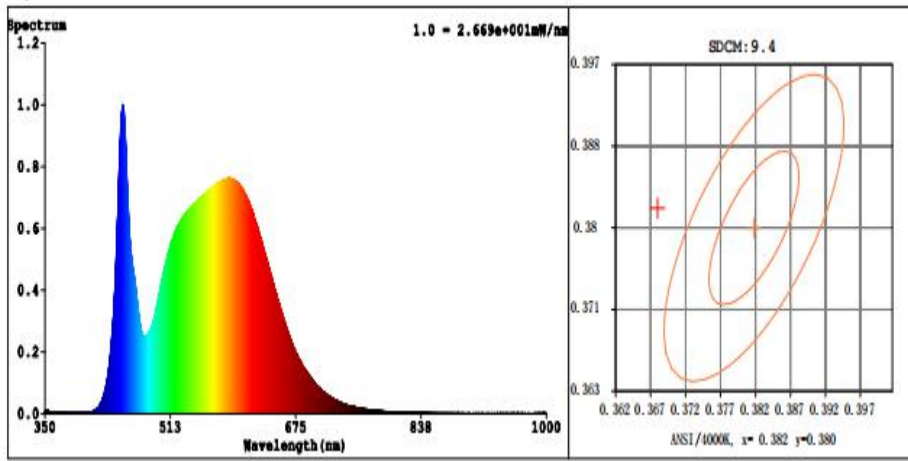


Circuit Diagram

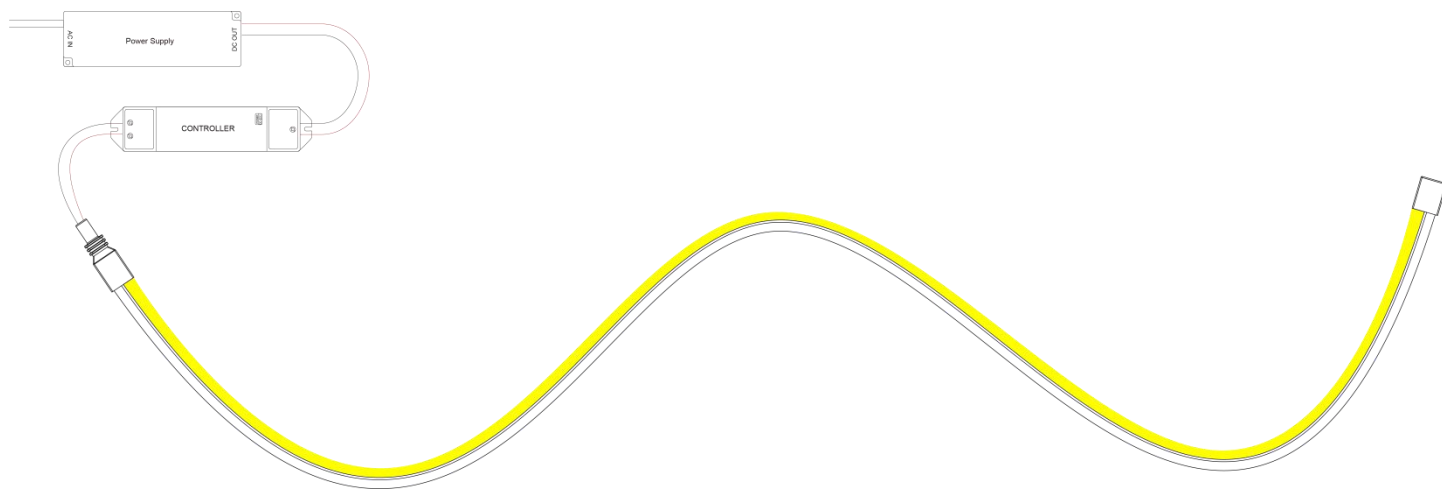

















Dimension Drawing

Neon Flex

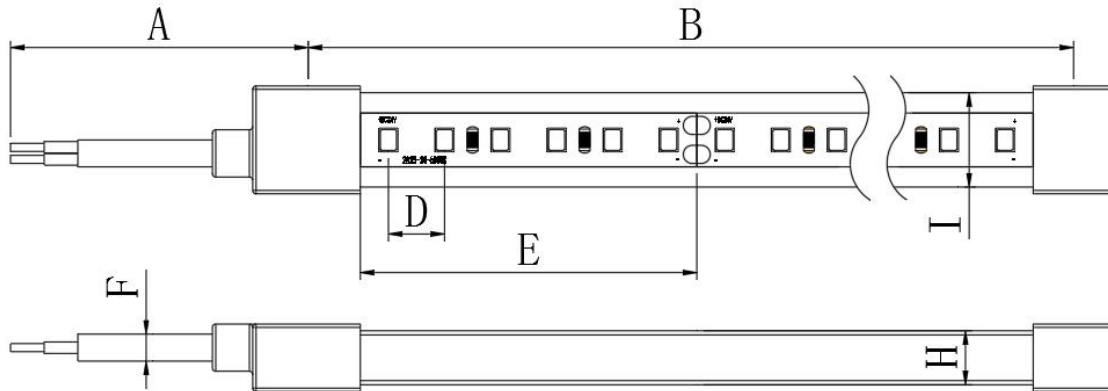


A Cable Length	B Strip length	D Distance of LEDS	E Cutting unit	F Cable diameter	H Strip thickness	I Strip width
300±10mm	5000±50mm	7.14±0.5mm	50±0.5mm	6±0.3mm	16±0.5mm	16±0.5mm

Front & end caps


Cable Types	Model No.	Image	Dimension	IP Rating
Double Injection	TC16X16-TS			IP67
				
Same Width	TC16X16-TT2			IP65
				
Side cable	TC16X16-TC			IP65
				
Bottom cable	TC16X16-TD			IP65
				

Optical Parameters

Distribution Curve Flux

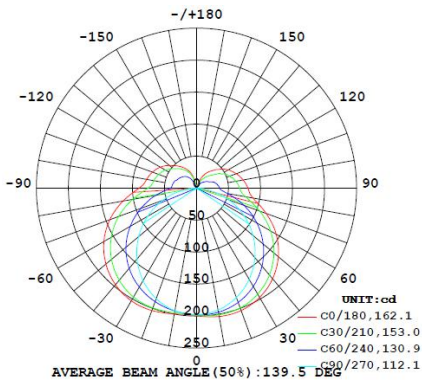


Illuminance

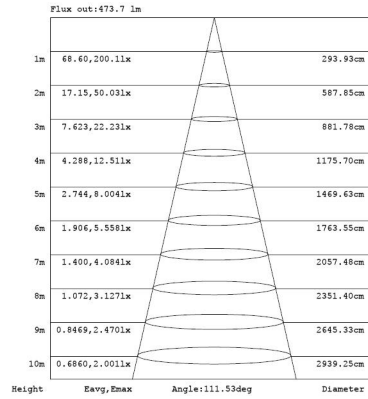


Figures of typical characteristics


Relation of Working Temperature and Power

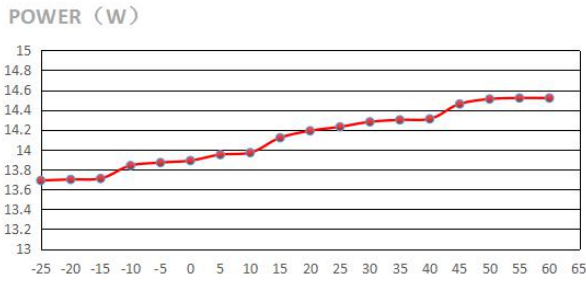


Relation of luminous flux and strip length (Only suitable for white series)

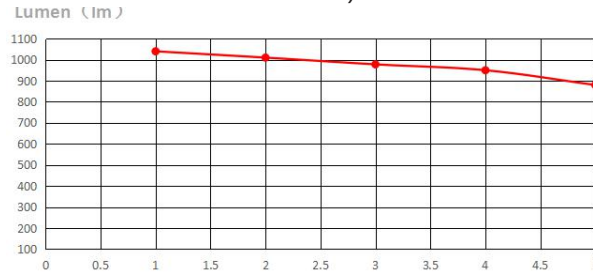




Relation of operating voltage and strip length

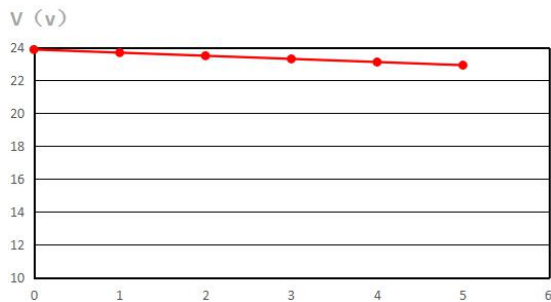

Standard Accessories

Image	Part No.	Description
	WW-AP1914-0025	Installation accessories set (A mounting buckle, screws)

Optional Accessories

Image	Part No.	Description
	WW-AP1914-200	Aluminum Profile: L2000*W19*H14mm
	WW-FLS102TC-CW(16mm)- TT2	Cutting accessories set (Front & end cap, power cord)
	WW-FLS102TC-CW(16mm)- TC	Cutting accessories set (Front & end cap, power cord)


Packaging

**Solution 1:
For Product Length≤5M**




Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
IP65/67	/	/	/	440*400 *260mm	15	19.05 KG ±10%	21.19KG ±10%	0.04576M³
	/	/	/	17.32*15.748 *10.236 in	15	41.99 Lbs ±10%	46.71Lbs ±10%	1.616ft³

**Solution 2:
For Product Length=5M**

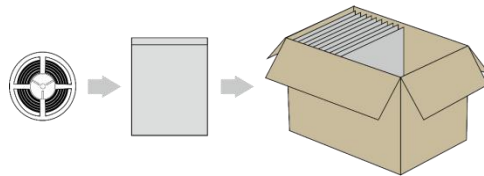

Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
IP65/67	470*440*0.14mm	/	/	440*400*260mm	7	8.89KG ±10%	12.36KG ±10%	0.05772m³
	18.5*17.32*0.006 in	/	/	17.32*15.75 *10.24 in	7	19.59Lbs ±10%	27.26 Lbs ±10%	1.616ft³

**Solution 3:
For Product Length=10M**

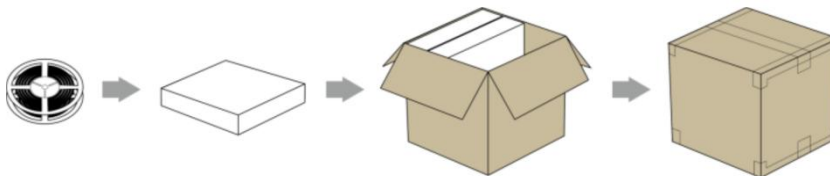

Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
IP65/IP67	330*50mm	345*330*61mm	1	362*265*350mm	4	10.16KG ±10%	13.41KG ±10%	0.0335m3
	12.99*1.96in	13.58*12.99*2.4in	1	14.25*10.43*13.77in	4	22.39Lbs ±10%	29.56Lbs ±10%	1.185ft3


Remarks :

- Please contact our sales manager for customized package (color box, blister etc.)


Cutting Instruction

- The cutting line logo on the Neon strip marked by calculated dimension, it has a little bit deviation between internal cutting line marked on the PCB surface;
- Please follow the cutting guidance as below:


Step 1: Fine the cutting line on the silicone coating, slice the silicone coating vertically by knife along the cutting line, but do not hurt the PCB inside.

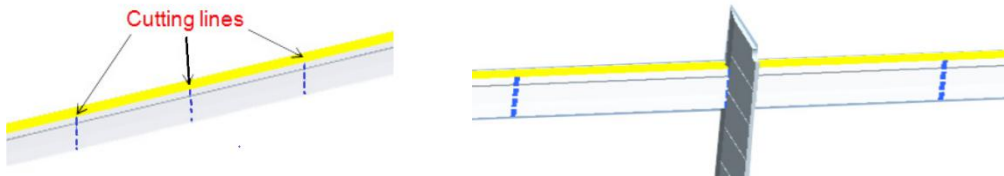


Step 2: Split the broken silicone coating and observe the deviation between "Cutting line on the PCB" and "Cutting line on the silicone coating side"

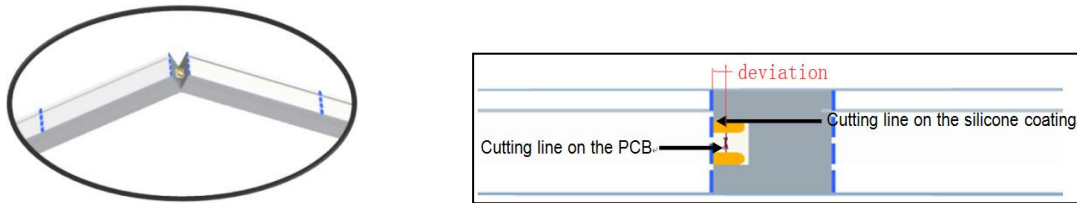

Step 3: Find the cutting line on the PCB, adjust to the exact cutting location and slice the silicone coating again.

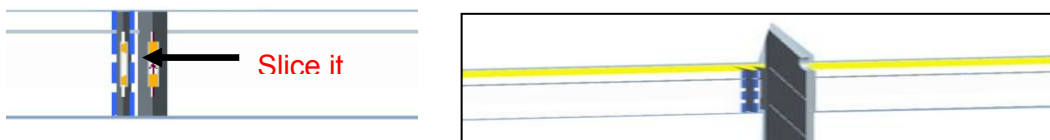


Step 4: Finally, use scissor to separate the Neon Flex along the cutting line on the PCB.

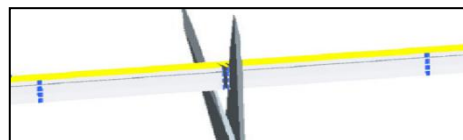


Installation Guidance


1. Do not bend smaller than allowed minimum bending diameter

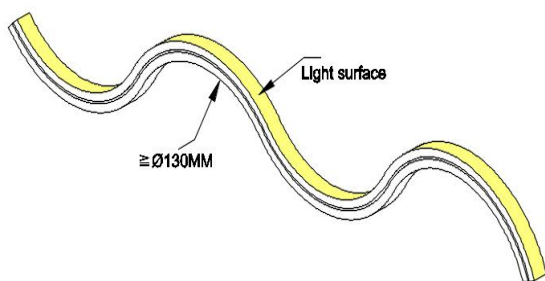


2. The neon strip can only be bent laterally (Along the FPC inside).

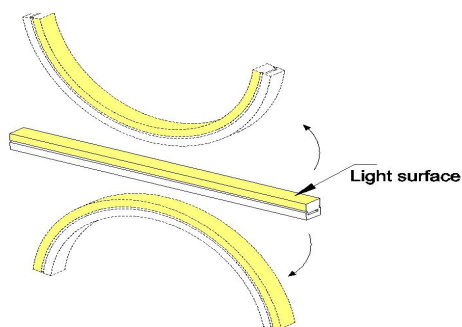


3. Don't bend the LED strip vertically, it will damage the circuit inside and cause product function failure.

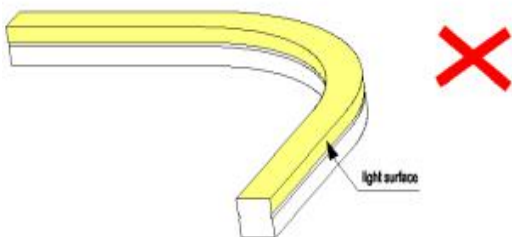

4. Don't twist the LED strip, it will damage the circuit inside and cause product function failure.

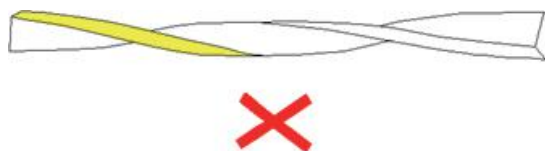

5. Do not hang or suspend the Neon strip in the air.

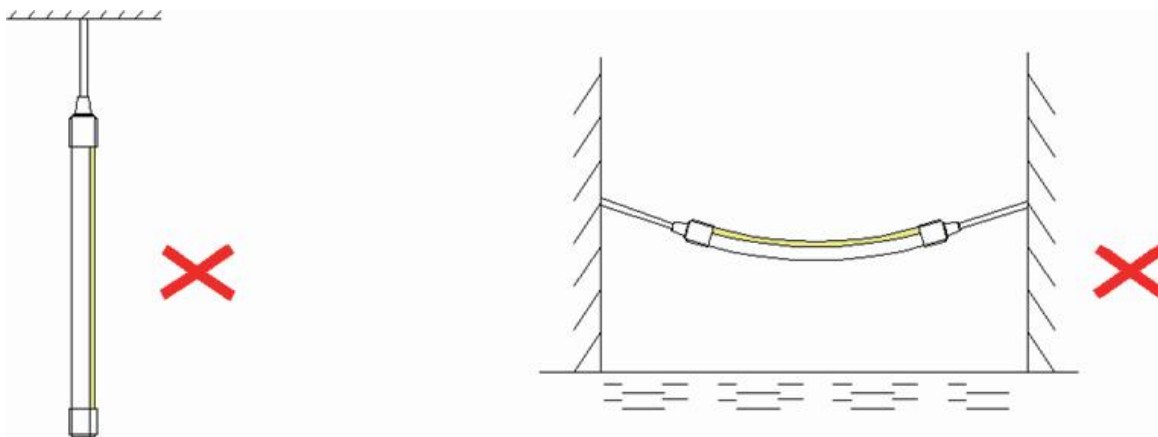











6、 Press the neon flex into mounted aluminum profile in one direction (Angle between strip and aluminum <math>< 15^\circ</math> degrees).
















7、 Incorrect installation like below pictures could lead to product function failure.





 **Cautions**

IP20	IP54	IP65	IP67	IP68
 Do not press the surface of LED	 Pay attention to high temperature environment	 Do not use in strong water waves environment	 Resist strong water waves impact	 Can apply to underwater do not deeper than 1m
 Pay attention to damp-proof and dustproof	 Do not apply to rainy environment	 Can be applied to rainy environment	 Do not apply to underwater environment for a long time	 No direct sunlight

 Do not tie a knot	 Do not winding	 Do not twist	 Do not cut when it is working	 Recommended the continuous working time do not exceed 12 hours daily	 Operating temperature -40°~+65° (-40°F~+149°F)	 Storage temperature 0°C~+60°C (32°F~+140°F)	 Operated by professionals
 Pay attention to the application environment	 IP Level will change after cutting	 Do not pull and crash	 Connected to power supply every 5 meters	 Power supply must be connected to ground(GND)	 The minimum bending diameter > 60mm	 Power supply retain > 20%	 Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.
**The right of final interpretation is owned by Dilux.