

WW-FLS102T23XX120X-24(WCP)-SU




Product Features

- High quality FPC, authentic 3M tape;
- Self-encapsulated design offer five optional white light from 2600-4250K;
- Light source lifetime: 50K hours (L70);



DC24V




		
B 20	F 65	R 67
Naked Strip	Silicone Tube	Silicone Extrusion
2 Years Warranty	2 Years Warranty	2 Years Warranty

Specification Parameter

- Max.Current (A): 24V 0.4A/M;
- Max.Power (W): 24V 9.6W/M;
- Max.length(M) : 24V 5M;
- Typ.Current (A): 24V 0.36A/M; (±10%)
- Typ.Power (W): 24V 8.73W/M; (±10%)
- Min. Bending Diameter : Φ60mm;

Packaging Diagram

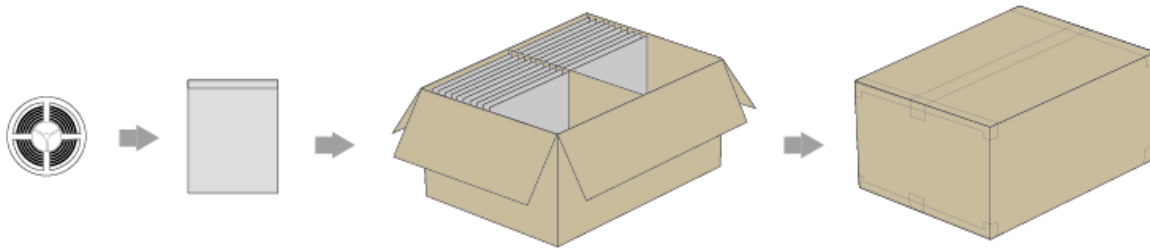











Packaging Information

















Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
B 20	250*270*0.14mm	/	/	440*400 *260mm	60	4.2KG ±10%	9.59 KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75 *10.24 in	60	9.25 Lbs ±10%	21.14Lbs ±10%	1.62ft³
F 65	250*270*0.14mm	/	/	440*400 *260mm	50	7.23KG ±10%	10.93KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75 *10.24 in	50	15.91Lbs ±10%	24.05Lbs ±10%	1.62ft³
R 67	270*300*0.14mm	/	/	520*370*300mm	36	6.48KG ±10%	11.83KG ±10%	0.06m³
	10.63*11.81*0.0055 in	/	/	20.47*14.57*11.81in	36	14.26Lbs ±10%	26.03Lbs ±10%	2.04ft³


Remarks :


- Please contact our sales account manager for customized package (color box, blister etc.)


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.),The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.**
****The right of final interpretation is owned by Dilux.**