

Product Specification

DC Flexible LED Strip

2835 7LEDs/unit Series

2835 Top LED 8mm FPC 140LEDs/M

WW-FLS102T28XW140X-24(WCP)-XR-ME

&

WW-FLS102T28XW140X-24(WCP)-XR-ME-EP



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039












Tel : (86) 755 8601 9190



Fax : (86) 755 8601 9197

<p>Product Features</p> <ul style="list-style-type: none"> • High quality FPC, authentic 3M tape; • Self-encapsulated design 2835 LED; • Light source lifetime:50K hours(L70); • Meet (EU)2019/2020 ErP regulations. • Min. Bending Diameter: Φ60mm • Max. length(M): 5M 	
<p>Technology info</p> <ul style="list-style-type: none"> • Lighting Technology: LED • DLS or NDLS: NDLS • MLS or NMLS: NMLS 	<p>Certification Standards</p> <ul style="list-style-type: none"> • EN55015:2019 • EN61547:2009 • EN60598-1:2015 • EN60598-2-20:2015 • EN62493:2015 • EN62471:2008

Non-ErP Waterproof Type	 B 20	 S 54	 F 65	 R 67	 RW 67	 RM 67
	Naked Strip	Silicone Dropping	Silicone Tube	Silicone Extrusion	Silicone Extrusion	Silicone Extrusion
	5 Years Warranty	3 Years Warranty	5 Years Warranty	5 Years Warranty	5 Years Warranty	5 Years Warranty

ErP Waterproof Type	 B 20	 F 65	 R 67
	Naked Strip	Silicone Tube	Silicone Extrusion
	5 Years Warranty	5 Years Warranty	5 Years Warranty

WW-FLS102T28XW140X-24(WCP)-XR-ME

Parameters for non-Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
E 20	WW-FLS102T28XW140B-24(WCP)-HR-ME	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1560	DC 24V
							Warm White	2600-2900K	2650-2770K	1620	
							Warm White	2900-3200K	2960-3110K	1680	
							Natural White	3700-4250K	3840-4080K	1800	
							Standard White	5700-6500K	/	1770	
	WW-FLS102T28XW140B-24(WCP)-UR-ME	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	1330	DC 24V
							Warm White	2900-3200K	2960-3110K	1460	
							Natural White	3700-4250K	3840-4080K	1480	
							Warm White	2300-2600K	/	1495	
							Warm White	2600-2900K	2650-2770K	1555	
F 65	WW-FLS102T28XW140F-24(WCP)-HR-ME	80	82	96	13.09	14.40	Warm White	2900-3200K	2960-3110K	1610	DC 24V
							Natural White	3700-4250K	3840-4080K	1725	
							Standard White	5700-6500K	/	1695	
							Warm White	2600-2900K	2650-2770K	1275	
							Warm White	2900-3200K	2960-3110K	1400	
	WW-FLS102T28XW140F-24(WCP)-UR-ME	90	90	100	13.09	14.40	Natural White	3700-4250K	3840-4080K	1420	DC 24V
							Warm White	2300-2600K	/	1420	
							Warm White	2600-2900K	2650-2770K	1470	
							Warm White	2900-3200K	2960-3110K	1530	
							Natural White	3700-4250K	3840-4080K	1510	
S 54	WW-FLS102T28XW140S-24(WCP)-HR-ME	80	82	96	13.09	14.40	Standard White	5700-6500K	/	1400	DC 24V
							Warm White	2600-2900K	2650-2770K	1235	
							Warm White	2900-3200K	2960-3110K	1325	
							Natural White	3700-4250K	3840-4080K	1330	
							Warm White	2300-2600K	/	1480	
	WW-FLS102T28XW140S-24(WCP)-UR-ME	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	1535	DC 24V
							Warm White	2900-3200K	2960-3110K	1595	
							Natural White	3700-4250K	3840-4080K	1710	
							Standard White	5700-6500K	/	1680	
							Warm White	2600-2900K	2650-2770K	1260	
R 67	WW-FLS102T28XW140R-24(WCP)-HR-ME	80	82	96	13.09	14.40	Warm White	2900-3200K	2960-3110K	1385	DC 24V
							Natural White	3700-4250K	3840-4080K	1405	
							Standard White	5700-6500K	/	1405	
							Warm White	2300-2600K	/	1480	
							Warm White	2600-2900K	2650-2770K	1535	
	WW-FLS102T28XW140R-24(WCP)-UR-ME	90	90	100	13.09	14.40	Warm White	2900-3200K	2960-3110K	1595	DC 24V
							Natural White	3700-4250K	3840-4080K	1710	
							Standard White	5700-6500K	/	1680	
							Warm White	2600-2900K	2650-2770K	1260	
							Warm White	2900-3200K	2960-3110K	1385	
RW 67	WW-FLS102T28XW140R-24(WCP)-HR-W-ME	80	82	96	13.09	14.40	Natural White	3700-4250K	3840-4080K	1405	DC 24V
							Standard White	5700-6500K	/	1405	
							Warm White	2300-2600K	/	1480	
							Warm White	2600-2900K	2650-2770K	1535	
							Warm White	2900-3200K	2960-3110K	1595	
	WW-FLS102T28XW140R-24(WCP)-UR-W-ME	90	90	100	13.09	14.40	Warm White	2900-3200K	2960-3110K	1385	DC 24V
							Natural White	3700-4250K	3840-4080K	1405	
							Standard White	5700-6500K	/	1405	
							Warm White	2600-2900K	2650-2770K	1260	
							Warm White	2900-3200K	2960-3110K	1385	
RM 67	WW-FLS102T28XW140R-24(WCP)-HR-W-M-ME	80	82	96	13.09	14.40	Natural White	3700-4250K	3840-4080K	1600	DC 24V
							Standard White	5700-6500K	/	1575	
							Warm White	2300-2600K	/	1390	
							Warm White	2600-2900K	2650-2770K	1440	
							Warm White	2900-3200K	2960-3110K	1495	
	WW-FLS102T28XW140R-24(WCP)-UR-W-M-ME	90	90	100	13.09	14.40	Warm White	2900-3200K	2960-3110K	1300	DC 24V
							Natural White	3700-4250K	3840-4080K	1320	
							Standard White	5700-6500K	/	1320	
							Warm White	2600-2900K	2650-2770K	1180	
							Warm White	2900-3200K	2960-3110K	1300	

Remarks:

- *The above color temperature is the color temperature of LED source.
- **Indicates SDCM<3 model is available, part number will add the suffix "-3S".
- The typ. Luminous flux tolerance range is $\pm 10\%$ (subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.

WW-FLS102T28XW140X-24(WCP)-XR-ME-EP

Parameters for Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	Rated voltage
E 20	WW-FLS102T28XW140B-24(WCP)-HR-ME-EP	80	82	96	13.96	15.36	Warm White	2700K	1690	121	E	DC 24V
							Warm White	3000K	1740	125	E	
							Natural White	4000K	1860	133	E	
							Standard White	6000K	1800	129	E	
	WW-FLS102T28XW140B-24(WCP)-UR-ME-EP	90	90	100	13.96	15.36	Warm White	2700K	1360	97	F	DC 24V
							Warm White	3000K	1500	107	F	
							Natural White	4000K	1530	110	F	
							Standard White	6000K	1540	110	E	
F 65	WW-FLS102T28XW140F-24(WCP)-HR-ME-EP	80	82	96	13.96	15.36	Warm White	2700K	1620	116	E	DC 24V
							Warm White	3000K	1670	120	E	
							Natural White	4000K	1780	128	E	
							Standard White	6000K	1720	123	E	
	WW-FLS102T28XW140F-24(WCP)-UR-ME-EP	90	90	100	13.96	15.36	Warm White	2700K	1230	88	F	DC 24V
							Warm White	3000K	1300	93	F	
							Natural White	4000K	1440	103	F	
							Standard White	6000K	1470	105	F	
R 67	WW-FLS102T28XW140R-24(WCP)-HR-ME-EP	80	82	96	13.96	15.36	Warm White	2700K	1600	115	E	DC 24V
							Warm White	3000K	1650	118	E	
							Natural White	4000K	1760	126	E	
							Standard White	6000K	1700	122	E	
	WW-FLS102T28XW140R-24(WCP)-UR-ME-EP	90	90	100	13.96	15.36	Warm White	2700K	1290	92	F	DC 24V
							Warm White	3000K	1420	102	F	
							Natural White	4000K	1440	103	F	
							Standard White	6000K	1460	105	F	

Remarks:

- *The above color temperature is the color temperature of LED source.
- While SDCM<3 model is available, part number will add the suffix "-3S".


Test condition of above technical data:

- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.


ErP Note:

- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power ≤ Pon +5% ;
- Measured lumen ≥Useful luminous flux -10%;
- Measured CRI ≥ Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

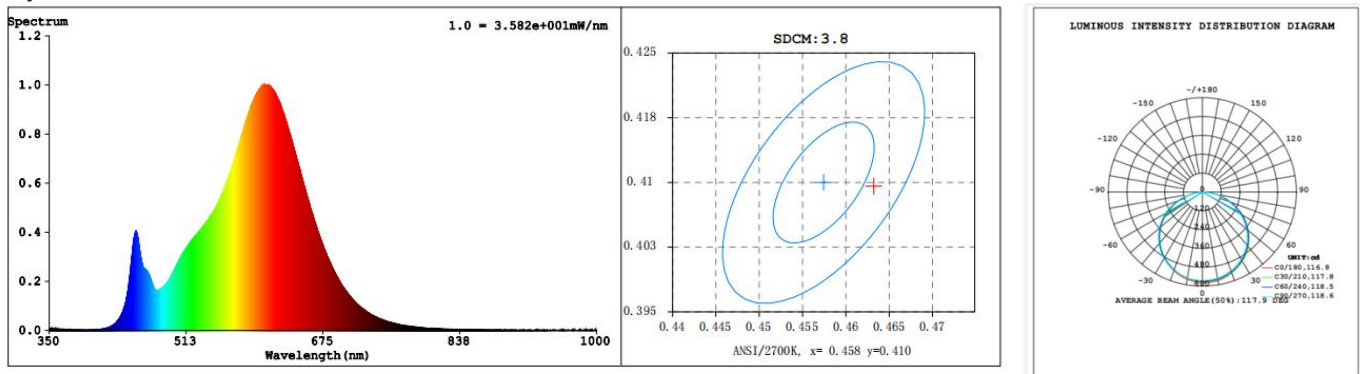

Dimension Drawing

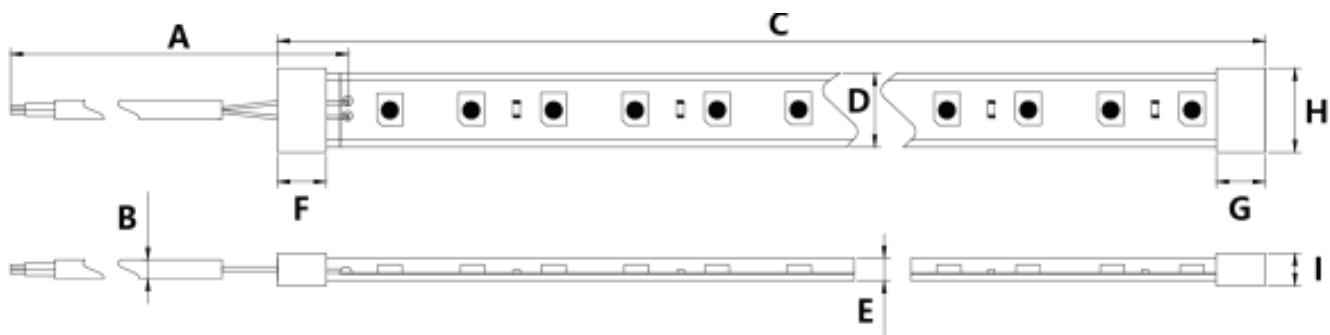


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Front cap length	G End cap length	H Cap width	I Cap thickness
20	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	1.2±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.047±0.02in	/	/	/	/
54	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	2.3±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.091±0.02in	/	/	/	/
65	300±10mm	Φ4.0±0.2mm	5020±50mm	10±0.5mm	4.0±0.5mm	22.5±0.5mm	10±0.5mm	12.5±0.5mm	6.0±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.39±0.02in	0.16±0.02in	0.89±0.02in	0.39±0.02in	0.49±0.02in	0.24±0.02in
67	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in
RW 67	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12.0±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in
RM 67	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12.0±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in





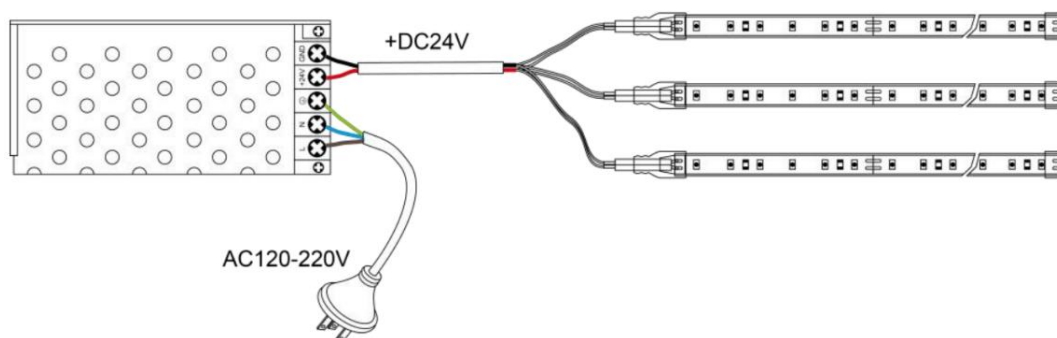

Remarks:

- If you need further information, please contact our sales manager.

Circuit Diagram




Standard Accessories

IP Level	Category	Description	Picture	Part No.	Application
B 20	/	/	/	/	/
	/	/	/	/	/
S 54	/	/	/	/	/
	/	/	/	/	/
F 65	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
R 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type R
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
RW 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type RW
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
RM 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type RM
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip

Optional Accessories

IP Level	Category	Description	Picture	Part No.	Density
S 20	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2B-P0W20-08	≤140LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-POP20-08	≤140LEDs/M
S 54	/	/	/	/	/
	/	/	/	/	/
F 65	/	/	/	/	/
	/	/	/	/	/
R 67	/	/	/	/	/
	/	/	/	/	/
RW 67	/	/	/	/	/
	/	/	/	/	/
RM 67	/	/	/	/	/
	/	/	/	/	/

Packaging Diagram

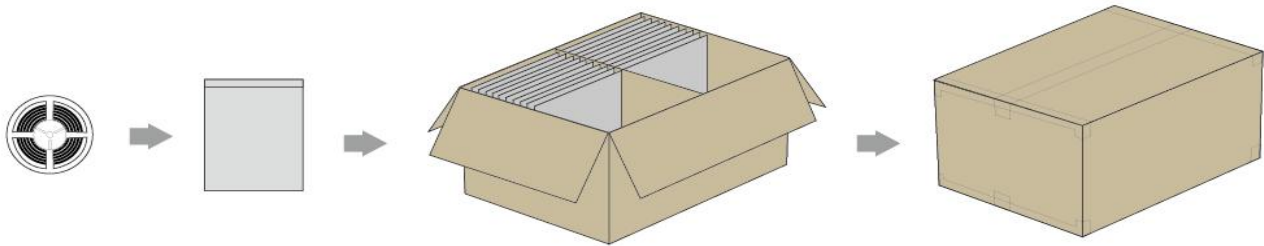











Packaging information

















Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
E 20	250*270*0.14mm	/	/	440*400*260mm	60	4.8KG ±10%	9.53KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236in	60	10.58 Lbs ±10%	20.966Lbs ±10%	1.62ft³
S 54	250*270*0.14mm	/	/	440*400*260mm	60	7.98KG ±10%	12.41KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236in	60	17.59Lbs ±10%	27.36 Lbs ±10%	1.62ft³
F 65	250*270*0.14mm	/	/	440*400*260mm	40	7.25KG ±10%	10.13KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75*10.24in	40	15.95Lbs ±10%	22.29Lbs ±10%	1.62ft³
R 67	270*300*0.14mm	/	/	520*370*300mm	36	9.99 KG ±10%	14.99 KG ±10%	0.06m³
	10.63*11.81*0.0056 in	/	/	20.5*14.6*11.81in	36	22.02 Lbs ±10%	33.05 Lbs ±10%	2.04ft³
RW 67	270*300*0.14mm	/	/	520*370*300mm	36	10.71KG ±10%	15.71KG ±10%	0.06m³
	10.63*11.81*0.0056 in	/	/	20.47*14.57*11.81in	36	23.61Lbs ±10%	34.63Lbs ±10%	2.04ft³
RM 67	270*300*0.14mm	/	/	520*370*300mm	36	6.3KG ±10%	11.73KG ±10%	0.06m³
	10.63*11.81*0.0056 in	/	/	20.47*14.57*11.81in	36	13.89 Lbs ±10%	25.86Lbs ±10%	2.04ft³


Remarks :


- Please contact our sales manager for customized package (color box, blister etc.)


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.),The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return. ****
****The right of final interpretation is owned by Dilux.**