

Product Specification

Flexible LED Strip

COB Series

8mm FPC COB 504LEDs/M 4.25W/0.5M IP20 Flexible LED Strip

WW-FLS102T88XW504B-24(WCP)-UR-EP(HL)



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039




Tel : (86) 755 8601 9190



Fax : (86) 755 8601 9197

<div>Product Features</div> <ul style="list-style-type: none">• High quality FPC, authentic 3M tape• Dot free• Meet (EU)2019/2020 ErP regulations.• Min. Bending Diameter: Φ60mm• Max. length(M): 5M	
<div>Technology info</div> <ul style="list-style-type: none">• Lighting Technology: LED• DLS or NDLS: NDLS• MLS or NMLS: NMLS	<div>Certification Standards</div> <ul style="list-style-type: none">• EN55015:2013+A1• EN61547:2009• EN60598-1:2015• EN60598-2-20:2015• EN62493:2015• EN62471:2008

ErP Waterpro of Type	
	Naked Strip
	5 Years Warranty

WW-FLS102T88XW504B-24(WCP)-UR-EP(HL)

Parameters for ErP

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	Rated voltage
20	WW-FLS102T88WW504B-24(WCP)-UR-EP(HL)	90	92	100	8.50	9.35	Warm White	2700K	602	71	G	DC 24V
	WW-FLS102T88WW504B-24(WCP)-UR-EP(HL)						Warm White	3000K	630	74	G	
	WW-FLS102T88NW504B-24(WCP)-UR-EP(HL)						Natural White	4000K	700	82	G	
	WW-FLS102T88SW504B-24(WCP)-UR-EP(HL)						Standard White	6000K	700	82	G	

Remarks:

- *The above color temperature is the color temperature of LED source.
- While SDCM<3 model is available, part number will add the suffix "-3S".

Test condition of above technical data:


- Surrounding temperature: 26 °C.
- Test after 15 mins turned on.

ErP Note:


- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power \leq Pon +5% ;
- Measured lumen \geq Useful luminous flux -10%;
- Measured CRI \geq Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

Spectrum

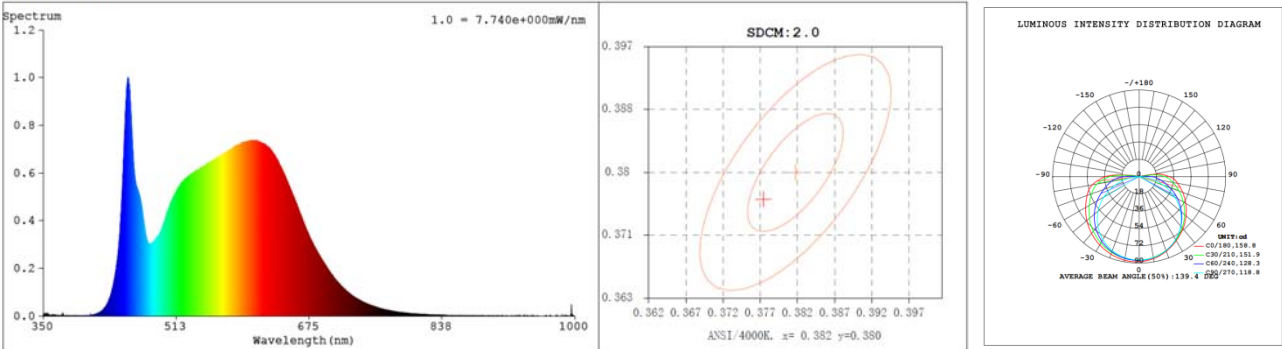


Dimension Drawing

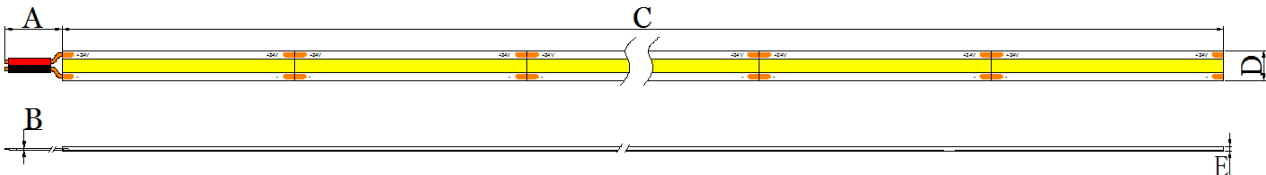



IP Grade	A. Power cable length	B. Power cable diameter	C. Strip length	D. Strip width	E. Strip thickness	F. Front cap length	G. End cap length	H. End cap width	I. End cap thickness
20	300±10mm	φ1.8±0.2mm	5000±50mm	8±0.5mm	1.9mm±0.5mm	/	/	/	/
	11.81±0.39in	φ0.07±0.008in	196.85±1.97in	0.31±0.02in	0.075±0.02in	/	/	/	/

Remarks:

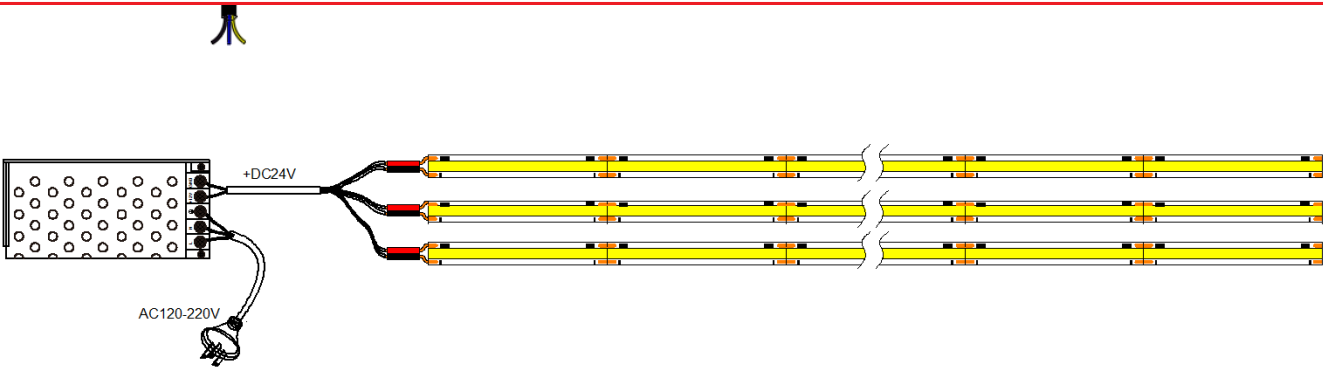
- If you need further information, please contact our sales manager.



Optional Accessories

IP Grade	Category	Description	Picture	Part No.	Density
E 20	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2B-POW20-08	/
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-POP20-08	/

Packaging Diagram

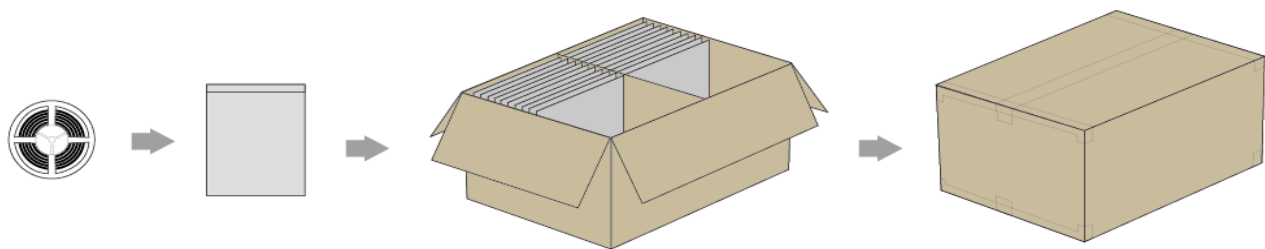

Packaging Information

Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
IP20	220*270*0.14mm	/		440*400 *260mm	60	3.9KG ±10%	8.57 KG ±10%	0.04576 m³
	8.66*10.63*0.0055 in	/		17.32*15.748 *10.236in	60	8.6 Lbs ±10%	18.89Lbs ±10%	1.616 ft³

Remarks :
Please contact our sales manager for customized package (color box, blister etc.)




In the process of product installation and use, it is forbidden to knot



In the process of product installation and use, it is forbidden to wind





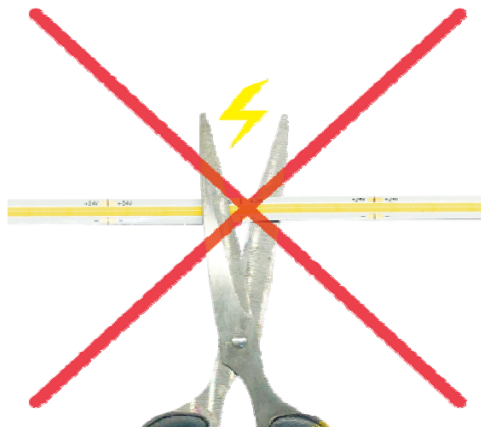







In the process of product installation and use, it is forbidden to twist




In the process of product installation and use, it is forbidden to cut

1. In the process of product installation and use, it is forbidden to reinstall and use.
2. It is forbidden to put the product back into the reel after removed from it.

Cautions

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20℃~+45℃ (-4°F~+113°F)	0℃~+60℃ (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles



For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.



For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.



During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

**The right of final interpretation is owned by Dilux.