

Product Specification

DC Flexible LED Strip

2835 6LEDs/unit Series

2835 Top LED 8mm FPC 120LEDs/M

WW-FLS102T28XW120X-24(WCP)-HR-LD



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)

Fax : (852) 3152 3039




Tel : (86) 755 8601 9190



Fax : (86) 755 8601 9197

Product Features

- High quality FPC, authentic 3M tape;
- Self-encapsulated design 2835 LED;
- Light source lifetime:50K hours(L70);
- Min. Bending Diameter: Φ60mm
- Max. length(M): 5M
- LED SDCM≤6

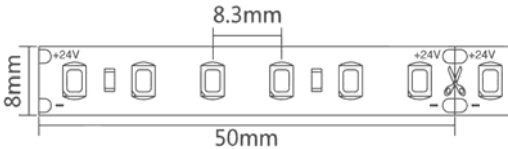

Technology info

- Lighting Technology: LED
- DLS or NDLS: NDLS
- MLS or NMLS: NMLS

Certification Standards

- EN55015:2013+A1
- EN61547:2009
- EN60598-1:2015
- EN60598-2-20:2015
- EN62493:2015
- EN62471:2008

Waterproof Type				
	B 20	F 65	R 67	S 54
	Naked Strip	Silicone Tube	Silicone Extrusion	Silicone Dropping
	2 Years Warranty	2 Years Warranty	2 Years Warranty	2 Years Warranty

WW-FLS102T28XW120X-24(WCP)-HR-LD

Parameters

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
	WW-FLS102T28XW120B-24(WCP)-HR-LD	80	82	96	12.00	14.40	Warm White	2500K	/	1260	DC 24V
							Warm White	2700K	/	1260	
							Warm White	3000K	/	1260	
							Natural White	4000K	/	1380	
							Standard White	6000K	/	1380	
	WW-FLS102T28XW120S-24(WCP)-HR-LD	80	82	96	12.00	14.40	Warm White	2500K	/	1180	DC 24V
							Warm White	2700K	/	1145	
							Warm White	3000K	/	1145	
							Natural White	4000K	/	1155	
							Standard White	6000K	/	1090	
	WW-FLS102T28XW120F-24(WCP)-HR-LD	80	82	96	12.00	14.40	Warm White	2500K	/	1205	DC 24V
							Warm White	2700K	/	1195	
							Warm White	3000K	/	1180	
							Natural White	4000K	/	1310	
							Standard White	6000K	/	1320	
	WW-FLS102T28XW120R-24(WCP)-HR-LD	80	82	96	12.00	14.40	Warm White	2500K	/	1170	DC 24V
							Warm White	2700K	/	1155	
							Warm White	3000K	/	1155	
							Natural White	4000K	/	1265	
							Standard White	6000K	/	1250	


Remarks:

- *The above color temperature is the color temperature of LED source.
- **Indicates SDCM<3 model is available, part number will add the suffix "-3S".
- The typ. Luminous flux tolerance range is $\pm 20\%$ (subject to the manufacturer's instrument test).


Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.

Optical Test Diagram

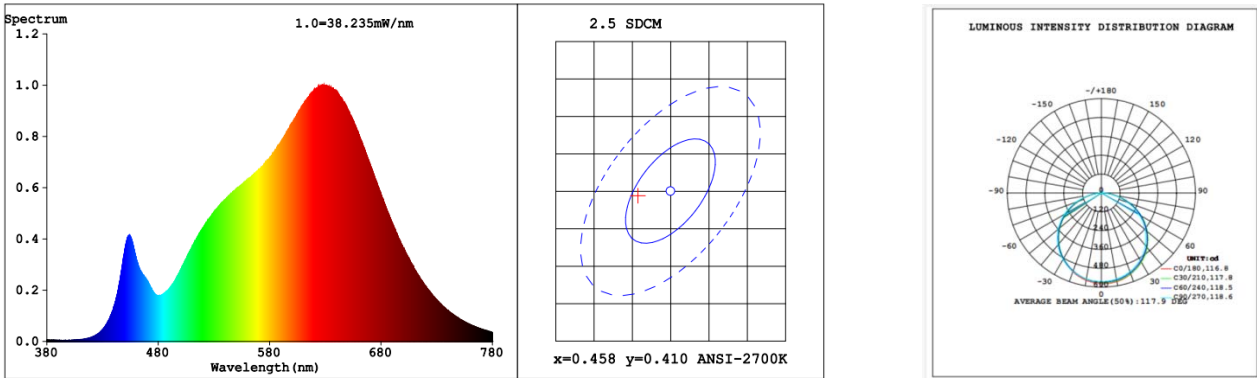

Dimension Drawing

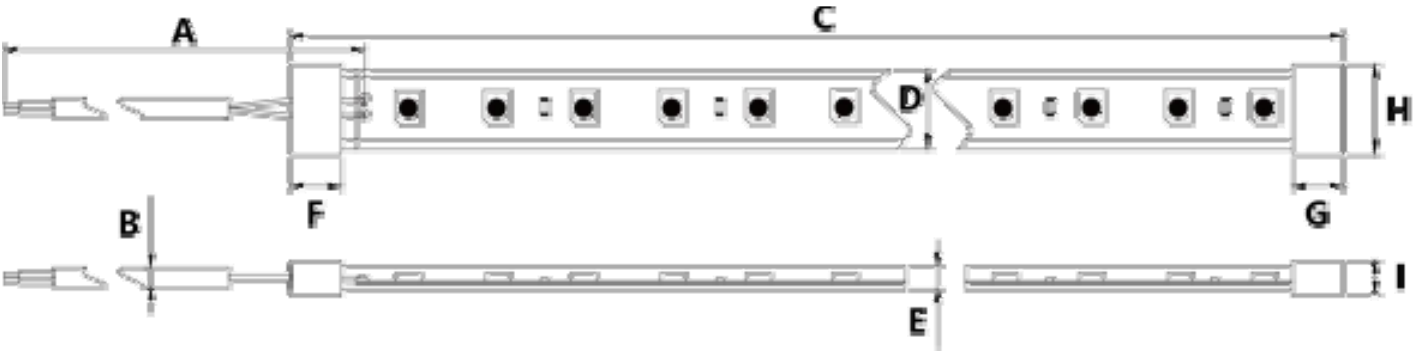


IP Level	A. Power cable length	B. Power cable diameter	C. Strip length	D. Strip width	E. Strip thickness	F. Front cap length	G. End cap length	H. End cap width	I. End cap thickness
B 20	150±10mm	1.7±0.2mm	5000±50mm	8±0.5mm	1.2±0.5mm	/	/	/	/
	5.9±0.39in	0.067±0.01in	196.85±1.97in	0.32±0.02in	0.047±0.02in	/	/	/	/
S 54	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	2.3±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.091±0.02in	/	/	/	/
F 65	300±10mm	Φ4.0±0.2mm	5020±50mm	10±0.5mm	4.0±0.5mm	22.5±0.5mm	10±0.5mm	12.5±0.5mm	6.0±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.39±0.02in	0.16±0.02in	0.89±0.02in	0.39±0.02in	0.49±0.02in	0.24±0.02in
R 67	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in

Remarks:

- If you need further information, please contact our sales manager.

Circuit Diagram

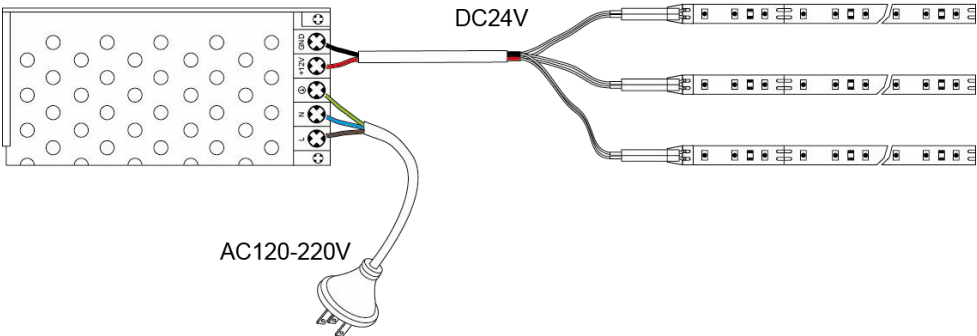


Standard Accessories

IP Level	Category	Description	Picture	Part No.	Application
E 20	/	/	/	/	/
	/	/	/	/	/
S 54	/	/	/	/	/
	/	/	/	/	/
F 65	/	/	/	/	/
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
R 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip

Optional Accessories

IP Level	Category	Description	Picture	Part No.	Density
E 20	Strip to wire Connector	2PIN Strip to wire Connector		WW-FLS102B-FS2 (8mm)	≤120LEDs/M
	Strip to wire Connector	2PIN Strip to wire Connector		WW-MLB-00SE2XB-08	≤120LEDs/M
	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2B-PWP2T-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-FLS102B-DD2(8MM)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		FLS102B-2FD2(8mm)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-MLB-00SE2BB-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-POP2T-08	≤120LEDs/M
S 54	Quick Connector	2PIN Connector		WW-FLS102D-2DD2(8mm)	≤120LEDs/M
	Quick Connector	2PIN Transparent Connector		WW-MLB-00DJ2BB-08	≤120LEDs/M
	Strip to wire Connector	2PIN Transparent Strip to wire Connector		WW-MLB-00SE2XB-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-FLS102D-FD2(8mm)	≤120LEDs/M
F 65	/	/	/	/	/
R 67	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2R-SW02T-08-300(22)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2R-SOP2T-08	≤120LEDs/M

Packaging Diagram

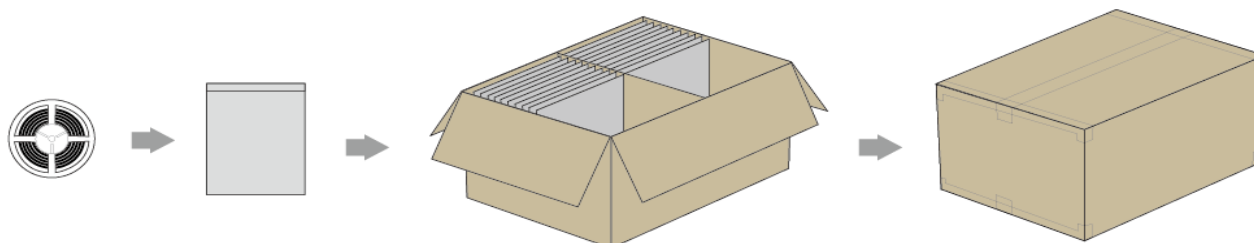

Packaging information

Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
B 20	220*250*0.14mm	/	/	440*400*260mm	52	3.2KG ±10%	7.13 KG ±10%	0.05m³
	8.66*9.84*0.0056 in	/	/	17.32*15.75*10.24 in	52	7.05 Lbs ±10%	15.72Lbs ±10%	1.62ft³
S 54	250*270*0.14mm	/	/	440*400*260mm	60	5.00KG ±10%	10.68KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75*10.24 in	60	11.00 Lbs ±10%	23.50Lbs ±10%	1.62ft³
F 65	250*280*0.14mm	/	/	440*400*260mm	40	7.25KG ±10%	10.13KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75*10.24 in	40	15.95Lbs ±10%	22.29Lbs ±10%	1.62ft³
R 67	270*300*0.14mm	/	/	520*370*300mm	36	6.30KG ±10%	11.73KG ±10%	0.06m³
	10.63*11.81*0.0056 in	/	/	20.47*14.57*11.81in	36	13.89 Lbs ±10%	25.86Lbs ±10%	2.04ft³

Remarks :

- Please contact our sales manager for customized package (color box, blister etc.)

 Cautions

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20℃ ~ +45℃ (-4°F ~ +113°F)	0℃ ~ +60℃ (32°F ~ +140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles



For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.



For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.



During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

**The right of final interpretation is owned by Dilux.