

# Product Specification

## SMD LV Strip PRO 2025 24V 252 LEDs/M Single color

WW-FLS102T73XW252X-24(WCP)-XR-S-ME  
&  
WW-FLS102T73XW252X-24(WCP)-XR-S-ME-EP

Apply to ERP Regulation (EU) 2019/2020



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road  
Kwun Tong, Kowloon, Hong Kong

Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039




China Factory :




Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,  
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

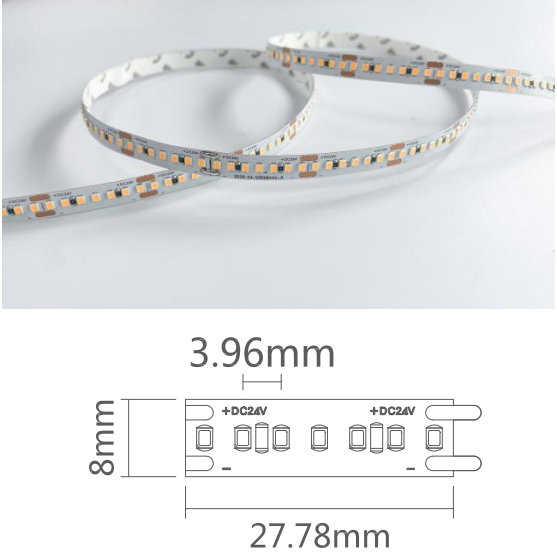Tel : (86) 755 8601 9190

Fax : (86) 755 8601 9197

<p><b>Product Features</b></p> <ul style="list-style-type: none"> <li>• High quality FPC, authentic 3M tape;</li> <li>• Self-encapsulated design 2025 LED;</li> <li>• Light source lifetime:50K hours(L70);</li> <li>• Meet (EU)2019/2020 ErP regulations.</li> <li>• Min. Bending Diameter: <math>\Phi 60\text{mm}</math></li> <li>• Max. length(M): 5M</li> </ul>	
<p><b>Technology info</b></p> <ul style="list-style-type: none"> <li>• Lighting Technology: LED</li> <li>• DLS or NDLS: NDLS</li> <li>• MLS or NMLS: NMLS</li> </ul>	<p><b>Certification Standards</b></p> <ul style="list-style-type: none"> <li>• EN55015:2019</li> <li>• EN61547:2009</li> <li>• EN60598-1:2015</li> <li>• EN60598-2-20:2015</li> <li>• EN62493:2015</li> <li>• EN62471:2008</li> </ul>

<b>Non-ErP Waterproof Type</b>	 <b>B 20</b>	 <b>F 65</b>	 <b>R 67</b>
	Naked Strip	Silicone Tube	Silicone Extrusion
	5 Years Warranty	5 Years Warranty	5 Years Warranty

<b>ErP Waterproof Type</b>	 <b>B 20</b>	 <b>F 65</b>	 <b>R 67</b>
	Naked Strip	Silicone Tube	Silicone Extrusion
	5 Years Warranty	5 Years Warranty	5 Years Warranty

WW-FLS102T73XW252X-24(WCP)-XR-S-ME

Parameters for non-Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)*	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
B 20	WW-FLS102T73XW252B-24(WCP)-HR-S-ME	80	82	96	8.73	9.60	Warm White	2600-2900K	2650-2770K	1140	DC 24V
							Warm White	2900-3200K	2960-3110K	1190	
							Natural White	3700-4250K	3840-4080K	1250	
							Standard White	5700-6500K	5800-6250K	1260	
B 20	WW-FLS102T73XW252B-24(WCP)-UR-S-ME	90	90	100	8.73	9.60	Warm White	2600-2900K	2650-2770K	960	DC 24V
							Warm White	2900-3200K	2960-3110K	990	
							Natural White	3700-4250K	3840-4080K	1020	
							Standard White	5700-6500K	5800-6250K	1020	
F 65	WW-FLS102T73XW252F-24(WCP)-HR-S-ME	80	82	96	8.73	9.60	Warm White	2600-2900K	2650-2770K	1090	DC 24V
							Warm White	2900-3200K	2960-3110K	1140	
							Natural White	3700-4250K	3840-4080K	1200	
							Standard White	5700-6500K	5800-6250K	1200	
F 65	WW-FLS102T73XW252F-24(WCP)-UR-S-ME	90	90	100	8.73	9.60	Warm White	2600-2900K	2650-2770K	920	DC 24V
							Warm White	2900-3200K	2960-3110K	950	
							Natural White	3700-4250K	3840-4080K	970	
							Standard White	5700-6500K	5800-6250K	970	
R 67	WW-FLS102T73XW252R-24(WCP)-HR-S-ME	80	82	96	8.73	9.60	Warm White	2600-2900K	2650-2770K	1080	DC 24V
							Warm White	2900-3200K	2960-3110K	1130	
							Natural White	3700-4250K	3840-4080K	1180	
							Standard White	5700-6500K	5800-6250K	1190	
R 67	WW-FLS102T73XW252R-24(WCP)-UR-S-ME	90	90	100	8.73	9.60	Warm White	2600-2900K	2650-2770K	910	DC 24V
							Warm White	2900-3200K	2960-3110K	940	
							Natural White	3700-4250K	3840-4080K	960	
							Standard White	5700-6500K	5800-6250K	960	

Remarks:

- \*The above color temperature is the color temperature of LED source.
- \*\*Indicates SDCM<3 model is available, part number will add the suffix "-3S".
- The typ. Luminous flux tolerance range is ±10% (subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.

WW-FLS102T73XW252X-24(WCP)-XR-S-ME-EP

Parameters for Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	Rated voltage
E 20	WW-FLS102T73XW252B-24(WCP)-HR-S-ME-EP	80	82	96	9.20	10.12	Warm White	2700K	1150	125	E	DC 24V
							Warm White	3000K	1200	130	E	
							Natural White	4000K	1260	137	D	
							Standard White	6000K	1270	138	D	
	WW-FLS102T73XW252B-24(WCP)-UR-S-ME-EP	90	90	100	9.20	10.12	Warm White	2700K	980	107	F	DC 24V
							Warm White	3000K	1010	110	F	
							Natural White	4000K	1040	113	E	
							Standard White	6000K	1040	113	E	
F 65	WW-FLS102T73XW252F-24(WCP)-HR-S-ME-EP	80	82	96	9.20	10.12	Warm White	2700K	1100	120	E	DC 24V
							Warm White	3000K	1150	125	E	
							Natural White	4000K	1200	130	E	
							Standard White	6000K	1210	132	E	
	WW-FLS102T73XW252F-24(WCP)-UR-S-ME-EP	90	90	100	9.20	10.12	Warm White	2700K	940	102	F	DC 24V
							Warm White	3000K	960	104	F	
							Natural White	4000K	1000	109	F	
							Standard White	6000K	1000	109	F	
R 67	WW-FLS102T73XW252R-24(WCP)-HR-S-ME-EP	80	82	96	9.20	10.12	Warm White	2700K	1090	118	E	DC 24V
							Warm White	3000K	1140	124	E	
							Natural White	4000K	1190	129	E	
							Standard White	6000K	1200	130	E	
	WW-FLS102T73XW252R-24(WCP)-UR-S-ME-EP	90	90	100	9.20	10.12	Warm White	2700K	930	101	F	DC 24V
							Warm White	3000K	960	104	F	
							Natural White	4000K	980	107	F	
							Standard White	6000K	980	107	F	

Remarks:

- \*The above color temperature is the color temperature of LED source.
- While SDCM<3 model is available, part number will add the suffix "-3S".

Test condition of above technical data:


- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.

ErP Note:


- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power ≤ Pon +5% ;
- Measured lumen ≥Useful luminous flux -10%;
- Measured CRI ≥ Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

Spectrum

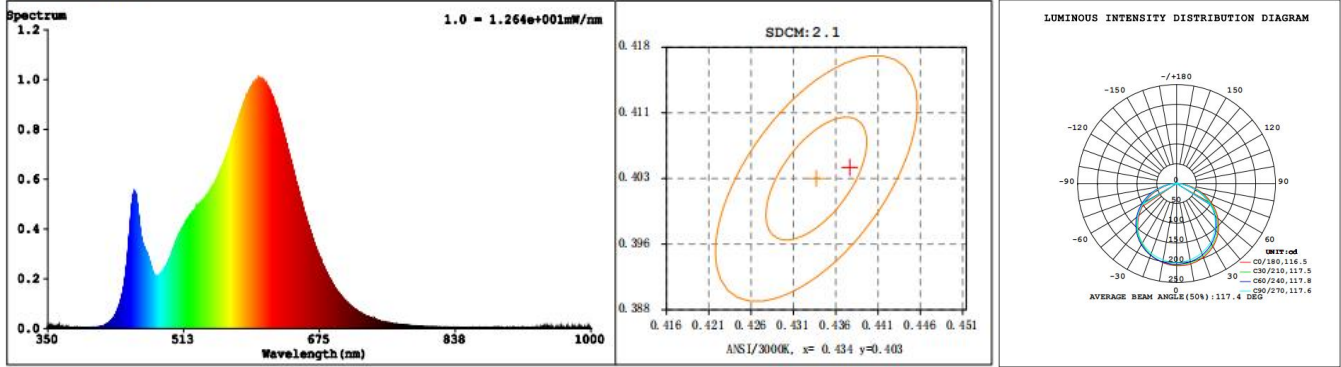

## Dimension Drawing

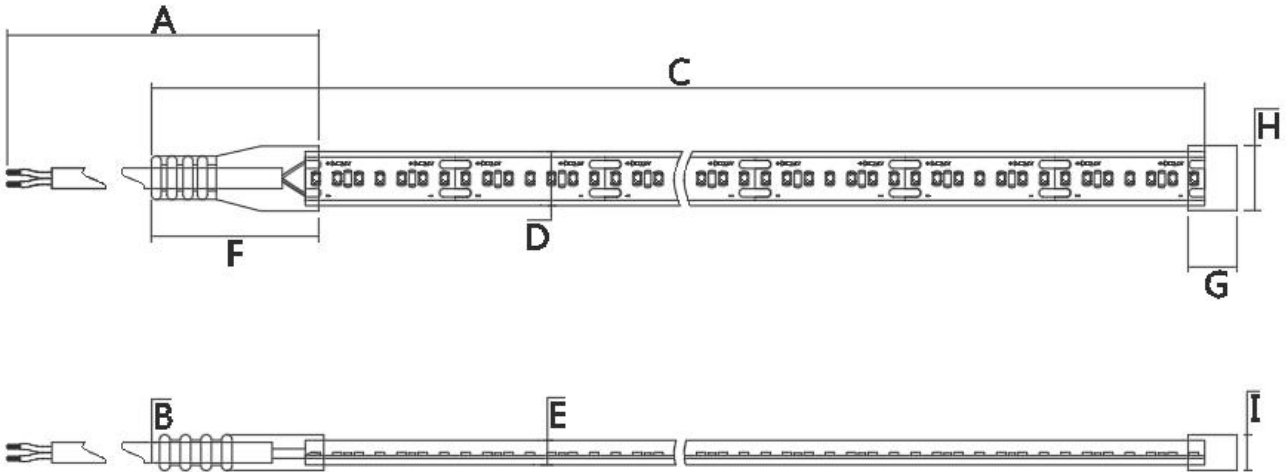


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Front cap length	G End cap length	H Cap width	I Cap thickness
<b>E 20</b>	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	1.2±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.31±0.02in	0.047±0.02in	/	/	/	/
<b>F 65</b>	300±10mm	Φ4.0±0.2mm	5020±50mm	10±0.5mm	4±0.5mm	22.5±0.5mm	10±0.5mm	12.5±0.5mm	6.0±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.39±0.02in	0.16±0.02in	0.89±0.02in	0.39±0.02in	0.49±0.02in	0.24±0.02in
<b>R 67</b>	300±10mm	Φ6.0±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12±0.5mm	7.0±0.5mm
	11.81±0.39in	0.24±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in

**Remarks:**

- If you need further information, please contact our sales manager.

## Circuit Diagram

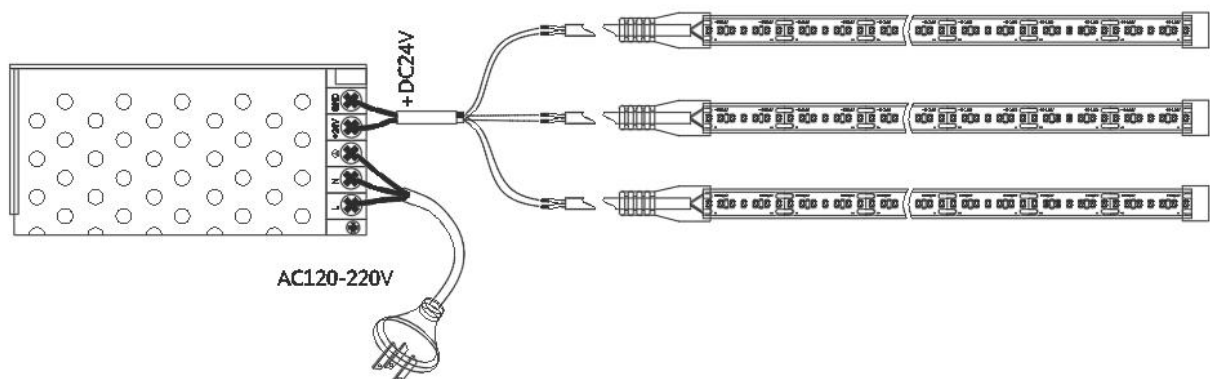


## Standard Accessories

IP Grade	Category	Description	Picture	Part No.	Application
B 20	/	/	/	/	/
	/	/	/	/	/
F 65	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW(10mm)	8mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
R 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102R-CW(10mm)	8mm Type R
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip

## Optional Accessories

IP Level	Category	Description	Picture	Part No.	Density
B 20	Strip to Strip Connector	2PIN Strip to Strip Connector		WW-F2B-POP2T-08(COB)	COB
	Strip to Wire Connector	2PIN Strip to Wire Connector		WW-F2B-OWP2T-08(COB)	COB
	Strip to Wire Connector	2PIN Strip to Wire Connector		WW-F2B-PWP2T-08(COB)	COB
	Strip to Strip Connector	2PIN Strip to Strip Connector		WW-FLS102B-3DD2(8MM)	COB
	Strip to Wire Connector	2PIN Strip to Wire Connector		WW-FLS102B-3FS2(8MM)	COB
	L-shape Strip to strip Connector	2PIN L-shape Strip to strip Connector		WW-FLS102B-3DD2G-L(8MM)	COB
	T-shape Strip to wire Connector	2PIN T-shape Strip to wire Connector		WW-FLS102B-3DD2G-T(8MM)	COB
	T-shape Strip to strip Connector	2PIN T-shape Strip to strip Connector		WW-FLS102B-3FS2G-T(8MM)	COB
	+ -shape Strip to strip Connector	2PIN + -shape Strip to strip Connector		WW-FLS102B-3DD2G-X(8MM)	COB
F 65	/	/	/	/	/
R 67	/	/	/	/	/

## Packaging Diagram

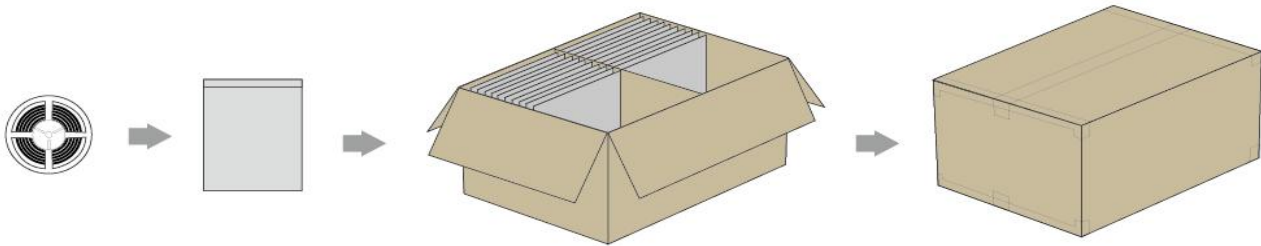

## Packaging information











Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
<b>B 20</b>	250*270*0.14mm	/	/	440*400*260mm	60	2.57KG ±10%	5.85KG ±10%	0.04576m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	60	5.67Lbs ±10%	12.90Lbs ±10%	1.616ft3
<b>F 65</b>	250*270*0.14mm	/	/	440*400*260mm	40	6.87KG ±10%	10.54KG ±10%	0.04576 m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	40	15.15Lbs ±10%	23.24Lbs ±10%	1.616 ft3
<b>R 67</b>	270*300*0.14mm	/	/	520*370*300mm	36	8.34KG ±10%	13.96KG ±10%	0.05772 m3
	10.63*11.81*0.0056 in	/	/	20.47*14.567*11.811 in	36	18.39Lbs ±10%	30.78Lbs ±10%	2.038 ft3

















**Remarks :**


- Please contact our sales manager for customized package (color box, blister etc.)





 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.),The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**\*\* If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return. \*\*The right of final interpretation is owned by Dilux.**