

Product Specification

Modeling Profile

WW-AP2508B

HK Office: China Factory:

Unit 1901, 19th Floor, NanYang Plaza, No. 57 HungTo Road Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge, Kwun Tong, Kowloon, Hong Kong Fucheng Street, Longhua District, Shenzhen, Guangdong, China

> Tel: (852) 3152 3059 (10 lines) Tel: (86) 755 8601 9190

Fax: (852) 3152 3039 Fax: (86) 755 8601 9197



WW-AP2508B-XXX


Features

- Adopt aviation aluminum 6063-T5, outstanding heat dissipation performance.
- High quality surface finish with silver, white or black.
- No screw tight front-end cap, with hole & without hole front-end cap options.
- Uniform illumination Easy installation





Dimension Drawing

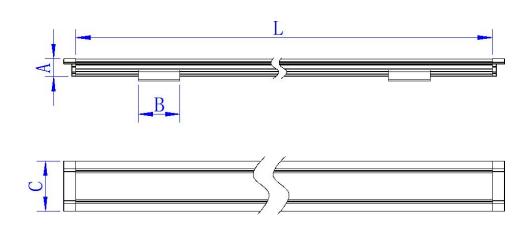




WW-AP2508B-212						
A	В	С	L			
7.64±0.2mm	20±0.2mm	24.7±0.2mm	2120±2mm			
0.3±0.007in	0.787±0.007in	0.972±0.007in	83.46±0.079in			



WW-AP2508B-100					
АВ		D	L		
7.64±0.2mm	20±0.2mm	20±0.2mm 24.7±0.2mm 1000±2			
0.3±0.007in	0.787±0.007in	0.972±0.007in	39.37±0.079in		

Exploded views

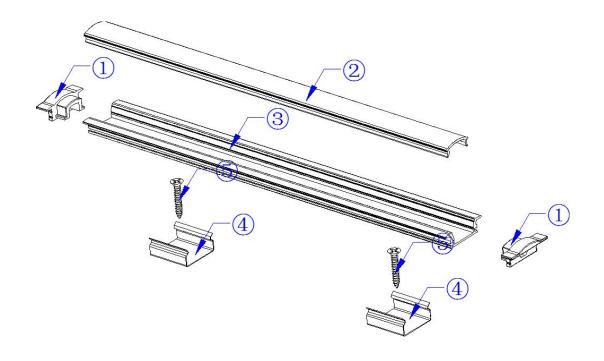



Standard parts

	Pict ure	Product name	Market model	Product size	Characteristi cs
1)		Plug(Pass through the wire hole)	AP2508B-DW	24.04 95 85 85 85 85 85 85 85 85 85 85 85 85 85	PC
1		Tail cover	AP2508B-DT	24.04 10.9	PC
2		Lens (PC cover)	AP2508B-CV	8. 0 8. 0 13. 91	PC(The light transmittance is 83%)
3	3	Aluminum profile	AP2508B-LC	12.2	6063-T5
4		Fastener	AP2507B-SM	15.59	Stainless stee
(S)	1	Cross tapping screw	\	16±0.9	Cross tapping screw


Remarks:

- ullet Because PC material has expansion and contraction feature, the linear expansion coefficient of PC material is 7*10 cm/°C , so when the product be used in different ambient temperatures, the length of PC cover will has a little bit tolerance which can be calculated by formula.
- For example: the original length of PC cover is 2 meters, when it has been used in 0°C ambience temperature, the length of PC cover will probably contract 0-5mm. when it has been used in 35°C ambience temperature, On the contrary, the length of PC cover will probably expand 0-5mm.




Packaging Diagram

For Product Length <2M

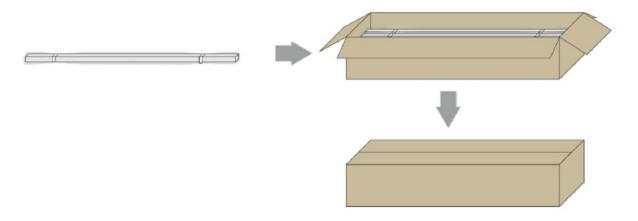

For Product Length ≥2M

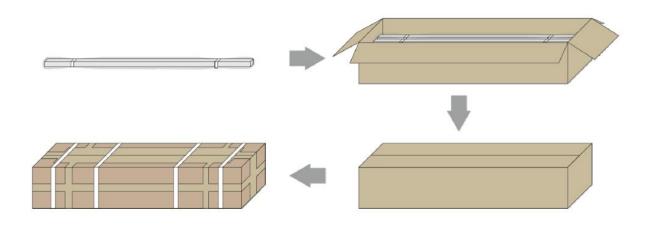

Part		Outer carton						Outer carton		
	NO.	size		PCS /ctn	N.W		G.W		volume	
	WW-AP2508B-212	2260*225*105m m	89*8.86*4.13in	60	15.9KG ± 10%	35.05Lbs ± 10%	21KG ± 10%	46.3Lbs ± 10%	0.0534 m³	1.886 cu ft
	WW-AP2508B-100	1060*225*105m m	41.73*8.86*4.1 3in	60	7.4KG ± 10%	16.3 Lbs \pm 10%	8.4KG ± 10%	18.52Lbs ± 10%	0.0250 4m³	0.884ft 3

Remark:

• Packaging information is for reference only, shipping is subject to actual condition.



Cautions





Do not use in places with oil or corrosive substances



Do not pull and collide when the product is working



Install the product in an appropriate environment





During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

 $[\]ensuremath{^{**}}\xspace he right of final interpretation is owned by Dilux.$

^{*}Copyright@2022 Dilux Lighting Ltd. All Rights Reserved.