

Product Specification

Flexible LED Strip

COB Series

10mm FPC COB 756LEDs/M IP20 Flexible LED Strip

WW-FLS103T88FC756B-24(WCP)



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China


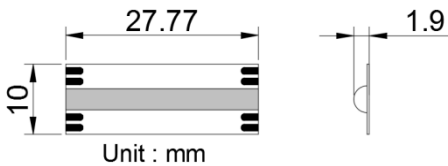
Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039



Tel : (86) 755 8601 9190

Fax : (86) 755 8601 9197

<p>Product Features</p> <ul style="list-style-type: none"> ● High quality FPC, authentic 3M tape; ● Warranty: 3 Years; ● Min. Bending Diameter: $\Phi 60\text{mm}$; ● Max.length(M):5M 	 
<p>Technology info</p> <ul style="list-style-type: none"> ● Lighting Technology: LED 	<p>Certification Standards</p> <ul style="list-style-type: none"> EN55015:2019 EN61547:2009 EN60598-1:2015 EN60598-2-20:2015 EN62493:2015 EN62471:2008

Waterproof Type	
	FCOB Strip
	3 Years Warranty

WW-FLS103T88FC756B-24(WCP)

Parameters

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)	Typ. Luminous Flux LM/M(39.37in)	Beam Angle (°, 1/2 θ)	Rated voltage
20	WW-FLS103T88FC756B-24(WCP)	/	/	/	5	6	R	615~625nm	100	140	DC 24V
					5	6	G	515-525nm	280	140	
					5	6	B	460~470nm	50	140	
					15	18	RGB	/	430	140	

Remarks:


- The typ.Luminous flux tolerance range is ±20%(subject to the manufacturer's instrument test).

Test condition of above technical data:


- Surrounding temperature: 26 °C.
- Test while turned on.

Optical Test Diagram

Spectrum

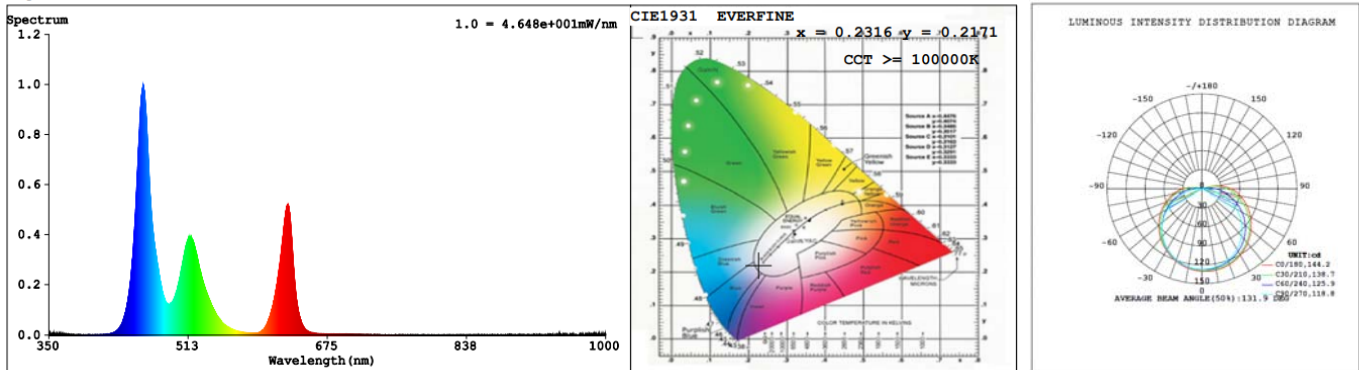

Dimension Drawing

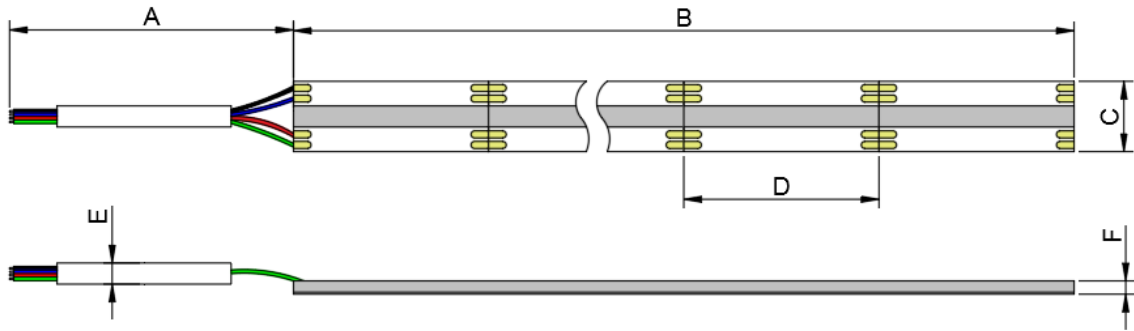


IP Grade	A. Power cable length	B. Strip length	C. Strip width	D. Unit Length	E. Power cable diameter	F. Strip thickness	G. End cap length	H. End cap width	I. End cap thickness
E20	300±10mm	5000±50mm	10±0.5mm	27.77±1mm	Φ6.0±0.2mm	1.9±0.5mm	/	/	/
	11.8±0.39in	196.85±1.97in	0.394±0.02in	1.094±0.04in	φ0.236±0.008in	0.075±0.02in	/	/	/


Remarks :

- If you need further information, please contact our sales account manager..

Circuit Diagram

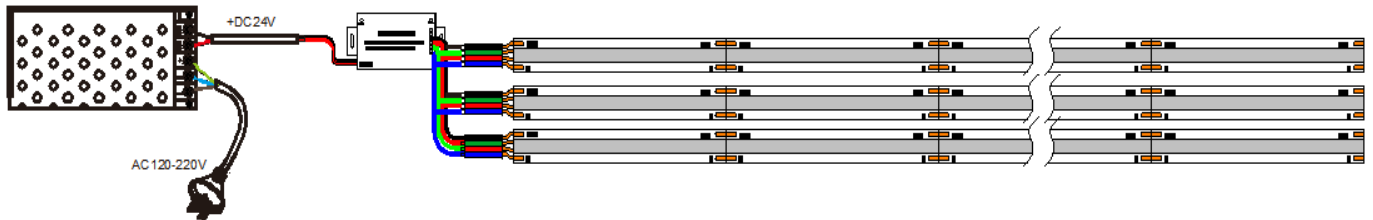

Packaging Diagram

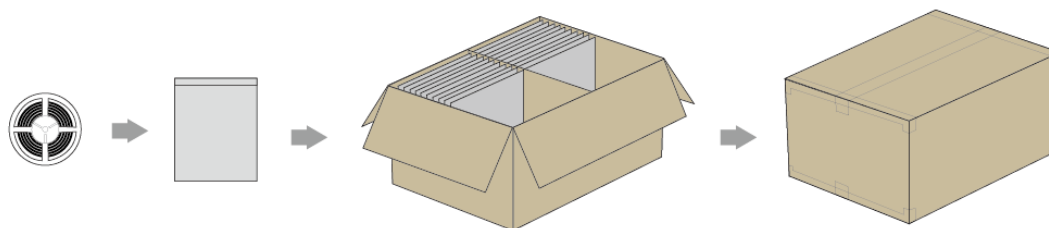


Packaging Information

IP Grade	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
E20	250*270*0.14mm	/		440*400*260mm	50	3.42KG ±10%	6.54KG ±10%	0.04576 m ³
	9.84*10.63*0.0055in	/		17.32*15.75 *10.24in	50	7.54 Lbs ±10%	14.42Lbs ±10%	1.616 ft ³

Remarks :

- Please contact our sales account manager for customized package (color box, blister etc.)

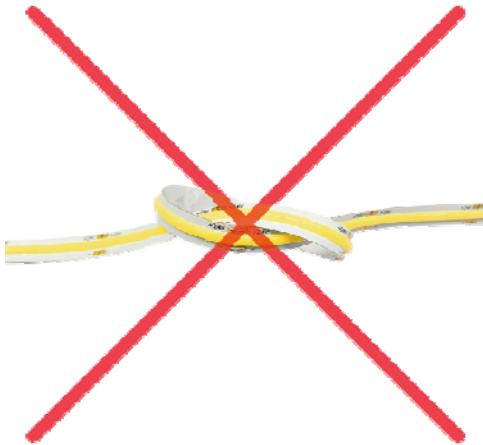


In the process of product installation and use, it is forbidden to knot



In the process of product installation and use, it is forbidden to wind





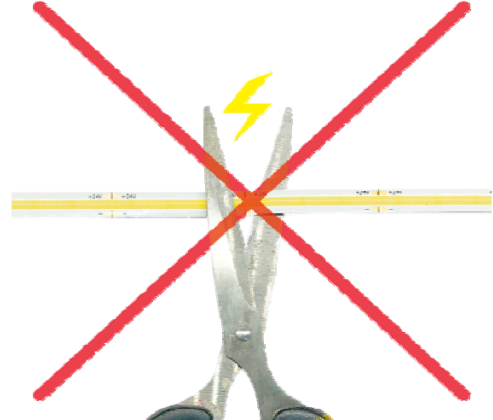







In the process of product installation and use, it is forbidden to twist




















In the process of product installation and use, it is forbidden to cut


1. In the process of product installation and use, it is forbidden to reinstall and use.
2. It is forbidden to put the product back into the reel after removed from it.


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C--+45°C (4°F--+113°F)	0°C--+60°C (32°F--+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.
**The right of final interpretation is owned by Dilux.