

Product Specification

Flexible LED Strip COB Ultra Long Series

10mm FPC COB 336LEDs/M Flexible LED Strip

WW-FLS102T89XW336X-48(WCP)-2500-UR-TR

&

WW-FLS102T89XW336X-48(WCP)-2500-UR-TR-EP



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)






Tel : (86) 755 8601 9190



Fax : (852) 3152 3039



Fax : (86) 755 8601 9197
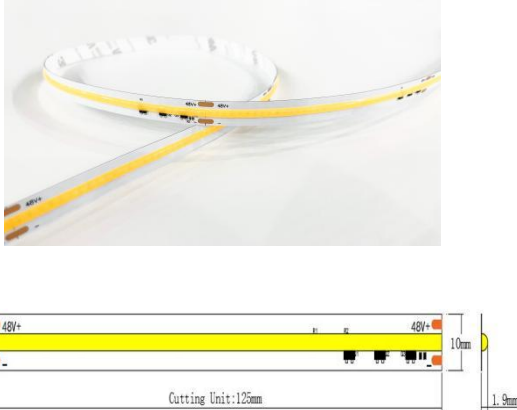
<p>Product Features</p> <ul style="list-style-type: none"> • High quality FPC, authentic 3M tape; • 2700/3000/4000/6000K four color temperature are available for selection; • Dot free; • Warranty: 5 Years; • Min. Bending Diameter: Φ60mm; • Meet (EU) 2019/2020 ErP regulations; • Max.length(M):25M. 	
<p>Technology info</p> <ul style="list-style-type: none"> • Lighting Technology: LED • DLS or NDLS: NDLS • MLS or NMLS: NMLS 	<p>Certification Standards</p> <ul style="list-style-type: none"> • EN55015 • EN61547 • EN60598-1 • EN60598-2-20 • EN62493 • EN62471

Non-ErP Waterproof Type	 B 20	 R 67
	FCOB Strip	Silicone Extrusion
	5 Years Warranty	5 Years Warranty

ErP Waterproof Type	 B 20	 R 67
	FCOB Strip	Silicone Extrusion
	5 Years Warranty	5 Years Warranty

WW-FLS102T89XW336X-48(WCP)-2500-UR-TR

Parameters for non-erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max.l Power (W/M)	Color	Color Temp. Of Light source (K) /Wavelength(nm) *	Typ. Luminous Flux LM/M(39.37in)	Beam Angle (°, 1/2 θ)	Rated voltage
B 20	WW-FLS102T89WW336B-48(WCP)-2500-UR-TR	90	90	100	9.4	10.34	Warm White	2700K	760	140	DC 48V
	WW-FLS102T89WW336B-48(WCP)-2500-UR-TR						Warm White	3000K	810		
	WW-FLS102T89NW336B-48(WCP)-2500-UR-TR						Natural White	4000K	880		
	WW-FLS102T89SW336B-48(WCP)-2500-UR-TR						Standard White	6000K	890		
R 67	WW-FLS102T89WW336R-48(WCP)-2500-UR-TR	90	90	100	9.4	10.34	Warm White	2700K	750	140	DC 48V
	WW-FLS102T89WW336R-48(WCP)-2500-UR-TR						Warm White	3000K	790		
	WW-FLS102T89NW336R-48(WCP)-2500-UR-TR						Natural White	4000K	870		
	WW-FLS102T89SW336R-48(WCP)-2500-UR-TR						Standard White	6000K	880		

Remarks:

- The typ.Luminous flux tolerance range is ±10%(subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26 °C .
- Test while turned on.

WW-FLS102T89XW336X-48(WCP)-2500-UR-TR-EP

Parameters for Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	Color Temp.(K) Wavelength(nm)	Typ. Luminous Flux LM/M(39.37in)	Lumen/watt	Energy Efficiency class	Beam Angle (°, 1/2 θ)	Rated voltage
E 20	WW-FLS102T89WW336B-48(WCP)-2500-UR-TR-EP	90	90	100	9.3	10.23	Warm White	2700K	720	77	G	140	DC 48V
	Natural White						3000K	750	81	G			
	Warm White						4000K	810	87	F			
	Natural White						6000K	820	88	F			
R 67	WW-FLS102T89WW336R-48(WCP)-2500-UR-TR-EP	90	90	100	9.3	10.23	Warm White	2700K	700	75	G	140	DC 48V
	Natural White						3000K	730	78	G			
	Warm White						4000K	800	86	F			
	Natural White						6000K	810	87	F			

Remarks :


Test condition of above technical data:

- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.


Note:

- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power ≤ P_{on}+5%;
- Measured lumen ≥ Useful luminous flux -10%;
- Measured CRI ≥ Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

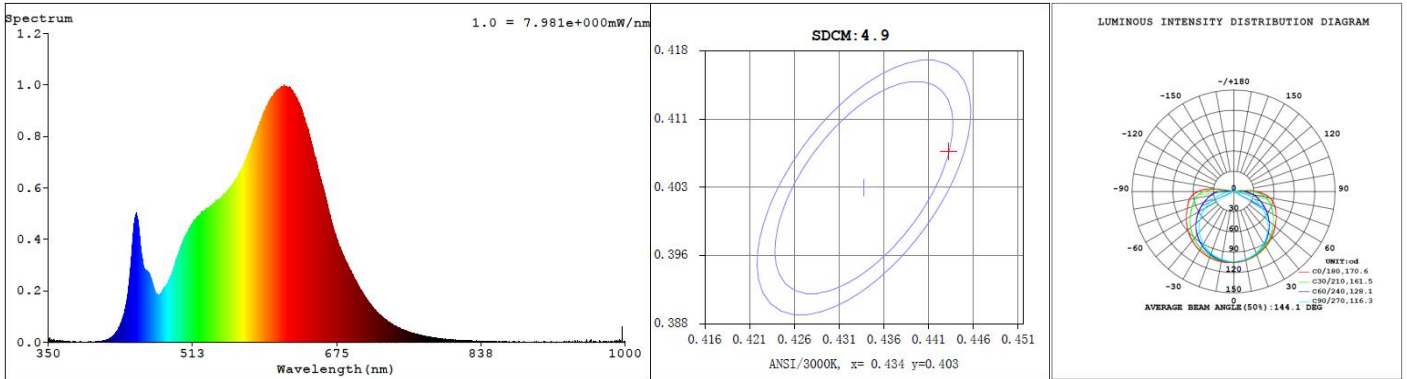

Dimension Drawing

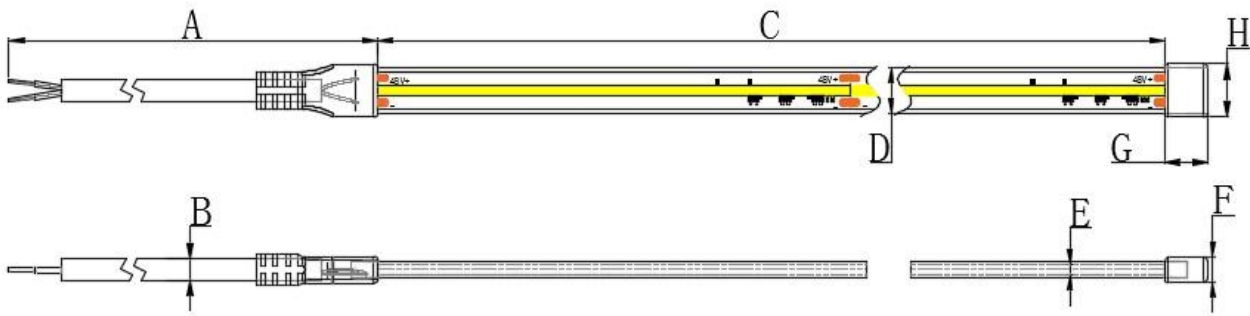


IP Grade	A.cable length	B. cable diameter	C. Strip length	D. Strip width	E. Strip thickness	F. End cap thickness	G. End cap length	H. End cap width
E 20	300±10mm	φ1.8±0.2mm	25000±200mm	10±0.5mm	1.9±0.5mm	/	/	/
	11.81±0.39in	φ0.07±0.008in	984.25±7.87in	0.39±0.02in	0.075±0.020in	/	/	/
R 67	315±10mm	φ6±0.2mm	25020±200mm	12±0.5mm	4.5±0.5mm	6.5±0.5mm	12±0.5mm	14±0.5mm
	12.4±0.39in	φ0.24±0.008in	985.04±7.87in	0.47±0.02in	0.18±0.02in	0.26±0.02in	0.47±0.02in	0.55±0.02in



Remarks :

- If you need further information, please contact our sales account manager..

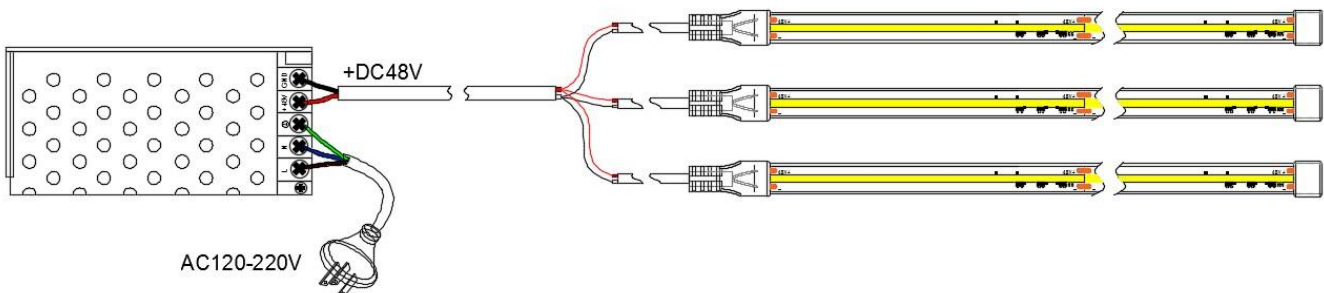
Circuit Diagram



Standard Accessories

IP Grade	Category	Description	Picture	Part No.	Application
E 20	/	/	/	/	/
	/	/	/	/	/
R 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	10mm Type R Waterproof strip
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	

Packaging Diagram

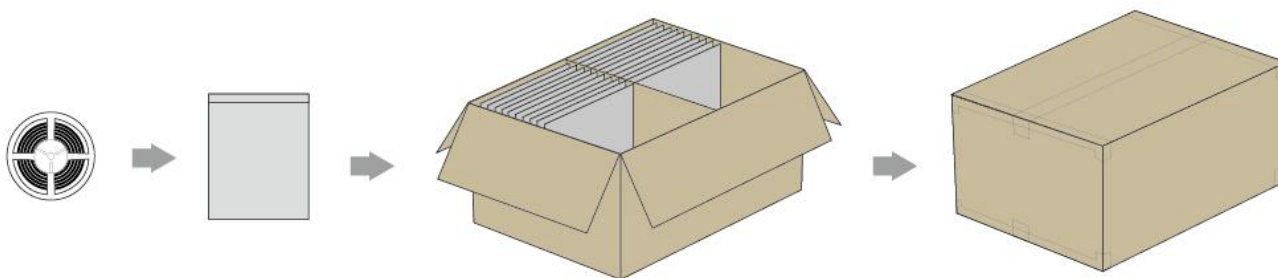


Packaging Information


	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
E 20	380*350*0.14mm	/	/	330*320*330mm	17	6.63 KG ±10%	11.02 KG ±10%	0.0348 m ³
	14.96*13.78*0.0055in	/	/	12.99*12.6*12.99in	17	14.62 Lbs ±10%	24.29 Lbs ±10%	1.229 ft ³
R 67	/	345*330*61mm	1	362*265*350mm	4	5.87 KG ±10%	9.14 KG ±10%	0.0336 m ³
	/	13.58*12.99*2.40in	1	14.25*10.43*13.78in	4	12.94 Lbs ±10%	20.15 Lbs ±10%	1.186 ft ³

Remarks :


- Please contact our sales account manager for customized package (color box, blister etc.)

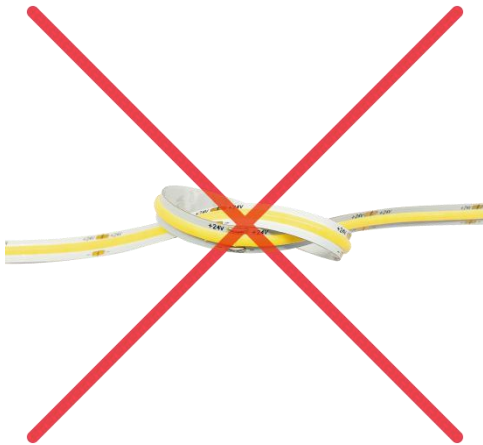


In the process of product installation and use, it is forbidden to knot

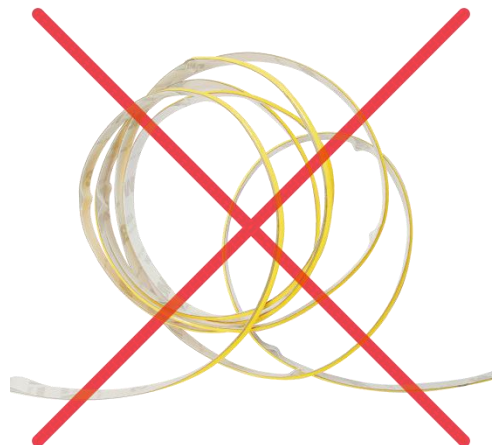

In the process of product installation and use, it is forbidden to wind

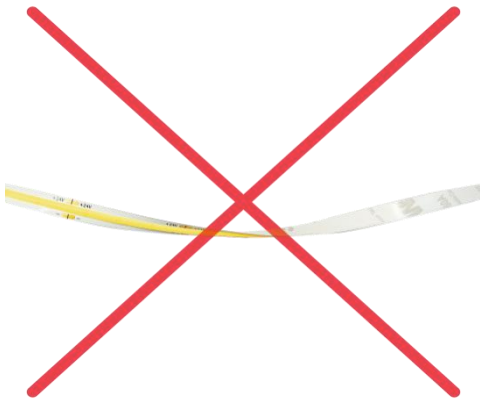



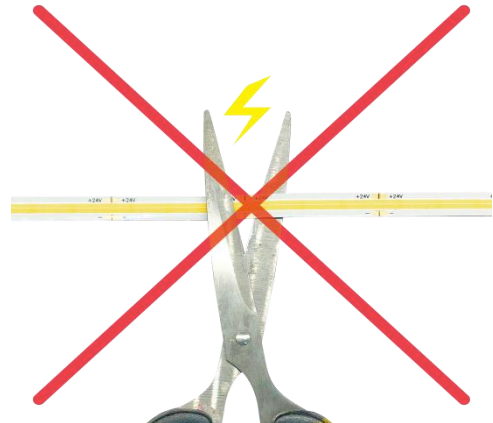







In the process of product installation and use, it is forbidden to twist




















In the process of product installation and use, it is forbidden to cut


1. In the process of product installation and use, it is forbidden to reinstall and use.
2. It is forbidden to put the product back into the reel after removed from it.


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.**
****The right of final interpretation is owned by Dilux.**