

# Product Specification

## SMD LV Strip PRO 2835 12V 60 LEDs/M Single color

WW-FLS102T29XW060X-12(WCP)-XR

Apply to ERP Regulation (EU) 2019/2020



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road  
Kwun Tong, Kowloon, Hong Kong

Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039











China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,  
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (86) 755 8601 9190

Fax : (86) 755 8601 9197

<p><b>Product Features</b></p> <ul style="list-style-type: none"> <li>• High quality FPC, authentic 3M tape;</li> <li>• Self-encapsulated design 2835 LED;</li> <li>• Light source lifetime:50K hours(L70);</li> <li>• Min. Bending Diameter: Φ60mm</li> <li>• Max. length(M): 5M</li> <li>• LED SDCM≤6</li> </ul>	
<p><b>Technology info</b></p> <ul style="list-style-type: none"> <li>• Lighting Technology: LED</li> <li>• DLS or NDLS: NDLS</li> <li>• MLS or NMLS: NMLS</li> </ul>	<p><b>Certification Standards</b></p> <ul style="list-style-type: none"> <li>• EN55015:2019</li> <li>• EN61547:2009</li> <li>• EN60598-1:2015</li> <li>• EN60598-2-20:2015</li> <li>• EN62493:2015</li> <li>• EN62471:2008</li> </ul>

<b>Waterproof Type</b>	 <b>B 20</b>	 <b>S 54</b>	 <b>K 54/65</b>	 <b>F 65</b>	 <b>R 67</b>	 <b>RW 67</b>	 <b>C 68</b>	 <b>E 67</b>	 <b>D 54</b>	 <b>RM 67</b>	
	Naked Strip	Silicone Dropping	Silicone Extrusion	Silicone Tube	Silicone Extrusion	Silicone Extrusion	Silicone Extrusion	PU Dropping +PVC Extrusion	PVC Extrusion	PU Dropping	Silicone Extrusion
	5 Years Warranty	3 Years Warranty	5 Years Warranty	5 Years Warranty	5 Years Warranty	5 Years Warranty	5 Years Warranty	1 Years Warranty	2 Years Warranty	2 Years Warranty	5 Years Warranty

WW-FLS102T29XW060X-12(WCP)-XR

Parameters

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage	
E 20	WW-FLS102T29XW060B-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1205	DC 12V	
							Warm White	2600-2900K	2650-2770K	1240		
							Warm White	2900-3200K	2960-3110K	1260		
							Natural White	3700-4250K	3840-4080K	1365		
							Standard White	5700-6500K	/	1365		
	WW-FLS102T29XW060B-12(WCP)-UR	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	960	DC 12V	
							Warm White	2900-3200K	2960-3110K	960		
							Natural White	3700-4250K	3840-4080K	1110		
	D 54	WW-FLS102T29XW060D-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1160	DC 12V
								Warm White	2600-2900K	2650-2770K	1175	
Warm White								2900-3200K	2960-3110K	1145		
Natural White								3700-4250K	3840-4080K	1105		
Standard White								5700-6500K	/	1065		
WW-FLS102T29XW060D-12(WCP)-UR		90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	920	DC 12V	
							Warm White	2900-3200K	2960-3110K	920		
							Natural White	3700-4250K	3840-4080K	990		
S 54		WW-FLS102T29XW060S-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1135	DC 12V
								Warm White	2600-2900K	2650-2770K	1125	
	Warm White							2900-3200K	2960-3110K	1145		
	Natural White							3700-4250K	3840-4080K	1150		
	Standard White							5700-6500K	/	1065		
	WW-FLS102T29XW060S-12(WCP)-UR	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	890	DC 12V	
							Warm White	2900-3200K	2960-3110K	870		
							Natural White	3700-4250K	3840-4080K	1000		
	K 54	WW-FLS102T29XW060K-12(WCP)-HR-TT	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1145	DC 12V
								Warm White	2600-2900K	2650-2770K	1175	
Warm White								2900-3200K	2960-3110K	1195		
Natural White								3700-4250K	3840-4080K	1300		
Standard White								5700-6500K	/	1300		
WW-FLS102T29XW060K-12(WCP)-UR-TT		90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	920	DC 12V	
							Warm White	2900-3200K	2960-3110K	920		
							Natural White	3700-4250K	3840-4080K	1065		
K 65		WW-FLS102T29XW060K-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1145	DC 12V
								Warm White	2600-2900K	2650-2770K	1175	
	Warm White							2900-3200K	2960-3110K	1195		
	Natural White							3700-4250K	3840-4080K	1300		
	Standard White							5700-6500K	/	1300		
	WW-FLS102T29XW060K-12(WCP)-UR	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	920	DC 12V	
							Warm White	2900-3200K	2960-3110K	920		
							Natural White	3700-4250K	3840-4080K	1065		
	F 65	WW-FLS102T29XW060F-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1160	DC 12V
								Warm White	2600-2900K	2650-2770K	1175	
Warm White								2900-3200K	2960-3110K	1185		
Natural White								3700-4250K	3840-4080K	1300		
Standard White								5700-6500K	/	1315		
WW-FLS102T29XW060F-12(WCP)-UR		90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	930	DC 12V	
							Warm White	2900-3200K	2960-3110K	930		
							Natural White	3700-4250K	3840-4080K	1065		

E 67	WW-FLS102T29XW060E-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1060	DC 12V
							Warm White	2600-2900K	2650-2770K	1075	
							Warm White	2900-3200K	2960-3110K	1095	
							Natural White	3700-4250K	3840-4080K	1200	
							Standard White	5700-6500K	/	1190	
R 67	WW-FLS102T29XW060E-12(WCP)-UR	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	805	DC 12V
							Warm White	2900-3200K	2960-3110K	795	
							Natural White	3700-4250K	3840-4080K	930	
R 67	WW-FLS102T29XW060R-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1120	DC 12V
							Warm White	2600-2900K	2650-2770K	1140	
							Warm White	2900-3200K	2960-3110K	1160	
							Natural White	3700-4250K	3840-4080K	1260	
							Standard White	5700-6500K	/	1245	
RW 67	WW-FLS102T29XW060R-12(WCP)-UR	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	950	DC 12V
							Warm White	2900-3200K	2960-3110K	900	
							Natural White	3700-4250K	3840-4080K	1020	
RW 67	WW-FLS102T29XW060R-12(WCP)-HR-W	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1120	DC 12V
							Warm White	2600-2900K	2650-2770K	1140	
							Warm White	2900-3200K	2960-3110K	1160	
							Natural White	3700-4250K	3840-4080K	1260	
							Standard White	5700-6500K	/	1245	
RW 67	WW-FLS102T29XW060R-12(WCP)-UR-W	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	950	DC 12V
							Warm White	2900-3200K	2960-3110K	900	
							Natural White	3700-4250K	3840-4080K	1020	
RM 67	WW-FLS102T29XW060R-12(WCP)-HR-M	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1075	DC 12V
							Warm White	2600-2900K	2650-2770K	1100	
							Warm White	2900-3200K	2960-3110K	1120	
							Natural White	3700-4250K	3840-4080K	1210	
							Standard White	5700-6500K	/	1210	
RM 67	WW-FLS102T29XW060R-12(WCP)-UR-M	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	865	DC 12V
							Warm White	2900-3200K	2960-3110K	865	
							Natural White	3700-4250K	3840-4080K	1000	
C 68	WW-FLS102T29XW060C-12(WCP)-HR	80	82	96	13.09	14.40	Warm White	2300-2600K	/	1060	DC 12V
							Warm White	2600-2900K	2650-2770K	1065	
							Warm White	2900-3200K	2960-3110K	1060	
							Natural White	3700-4250K	3840-4080K	1055	
							Standard White	5700-6500K	/	940	
C 68	WW-FLS102T29XW060C-12(WCP)-UR	90	90	100	13.09	14.40	Warm White	2600-2900K	2650-2770K	845	DC 12V
							Warm White	2900-3200K	2960-3110K	845	
							Natural White	3700-4250K	3840-4080K	900	




Remarks:

- \*The above color temperature is the color temperature of LED source.
- \*\*Indicates SDCM<3 model is available, part number will add the suffix "-3S".
- The typ. Luminous flux tolerance range is  $\pm 10\%$  (subject to the manufacturer's instrument test).


Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.

**Optical Test Diagram**

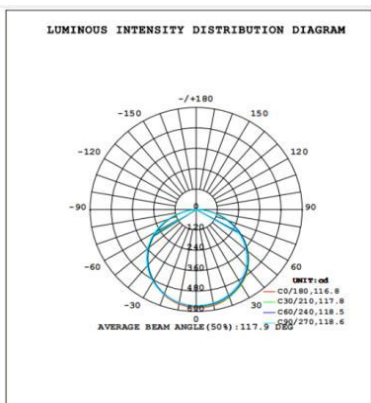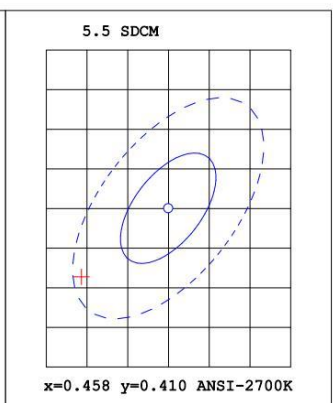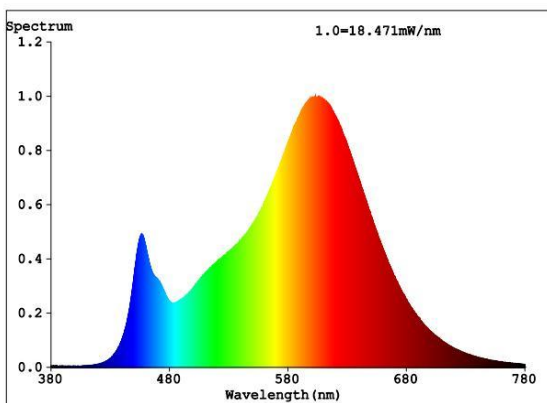

## Dimension Drawing

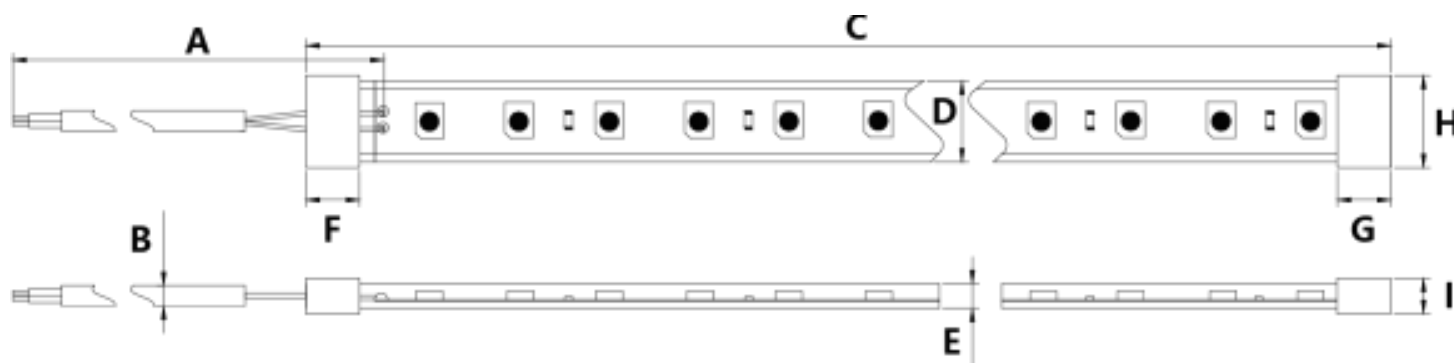


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Front cap length	G End cap length	H Cap width	I Cap thickness
<b>B 20</b>	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	1.2±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.047±0.02in	/	/	/	/
<b>D 54</b>	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	2.6±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.102±0.02in	/	/	/	/
<b>S 54</b>	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	2.3±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.091±0.02in	/	/	/	/
<b>K 54</b>	300±10mm	Φ4.0±0.2mm	5020±50mm	9.2±0.2mm	4±0.2mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.36±0.01in	0.16±0.01in	/	/	/	/
<b>K 65</b>	300±10mm	Φ4.0±0.2mm	5020±50mm	9.2±0.5mm	4±0.2mm	10.5±0.5mm	10.5±0.5mm	11.2±0.5mm	6±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.36±0.02in	0.16±0.01in	0.41±0.02in	0.41±0.02in	0.44±0.02in	0.34±0.02in
<b>F 65</b>	300±10mm	Φ4.0±0.2mm	5020±50mm	10±0.5mm	4.0±0.5mm	22.5±0.5mm	10±0.5mm	12.5±0.5mm	6.0±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.39±0.02in	0.16±0.02in	0.89±0.02in	0.39±0.02in	0.49±0.02in	0.24±0.02in
<b>E 67</b>	300±10mm	Φ4.0±0.2mm	5020±50mm	10.5±0.5mm	5.5±0.5mm	27.5±0.5mm	12.5±0.5mm	13.5±0.5mm	7.5±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.41±0.02in	0.22±0.02in	1.08±0.02in	0.49±0.02in	0.53±0.02in	0.30±0.02in
<b>R 67</b>	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in
<b>RW 67</b>	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12.0±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in
<b>RM 67</b>	300±10mm	Φ5.8±0.2mm	5020±50mm	10±0.5mm	5±0.5mm	30±0.5mm	11±0.5mm	12.0±0.5mm	7.0±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.39±0.02in	0.20±0.02in	1.18±0.02in	0.43±0.02in	0.47±0.02in	0.28±0.02in
<b>C 68</b>	300±10mm	Φ4.0±0.2mm	5020±50mm	11.5±0.5mm	4.5±0.5mm	27.5±0.5mm	12.5±0.5mm	13.5±0.5mm	7.5±0.5mm
	11.81±0.39in	0.16±0.008in	197.64±1.97in	0.45±0.02in	0.18±0.02in	1.08±0.02in	0.49±0.02in	0.53±0.02in	0.30±0.02in





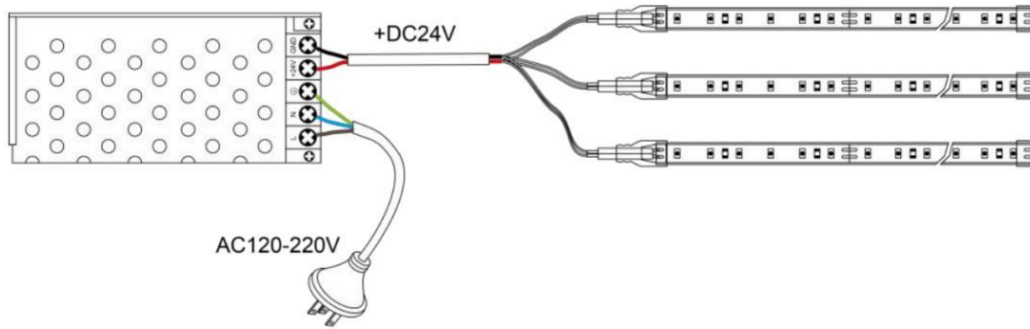








### Remarks:

- If you need further information, please contact our sales manager.




















## Circuit Diagram







## Standard Accessories

IP Level	Category	Description	Picture	Part No.	Application
<b>E 20</b>	/	/	/	/	/
<b>D 54</b>	/	/	/	/	/
<b>S 54</b>	/	/	/	/	/
<b>K 54/65</b>	/	/	/	/	/
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
<b>F 65</b>	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
<b>E 67</b>	Connection Accessories	Front cap+End cap+Cable		WW-FLS102E-CW (10mm)	8mm Type E
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
<b>R 67</b>	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type R
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
<b>RW 67</b>	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type RW
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
<b>RM 67</b>	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type RM
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
<b>C 68</b>	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	8mm Type C
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip


## Optional Accessories

IP Level	Category	Description	Picture	Part No.	Density
B 20	Strip to wire Connector	2PIN Strip to wire Connector		WW-FLS102B-FS2 (8mm)	≤120LEDs/M
	Strip to wire Connector	2PIN Strip to wire Connector		WW-MLB-00SE2XB-08	≤120LEDs/M
	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2B-PWP2T-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-FLS102B-DD2(8MM)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		FLS102B-2FD2(8mm)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-MLB-00SE2BB-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-POP2T-08	≤120LEDs/M
D 54	Quick Connector	2PIN Connector		WW-FLS102D-2DD2(8MM)	≤120LEDs/M
	Quick Connector	2PIN Transparent Connector		WW-MLB-00DJ2BB-08	≤120LEDs/M
	Strip to wire Connector	2PIN Transparent Strip to wire Connector		WW-MLB-00SE2XB-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-FLS102D-FD2(8MM)	≤120LEDs/M
S 54	Quick Connector	2PIN Connector		WW-FLS102D-2DD2(8mm)	≤120LEDs/M
	Quick Connector	2PIN Transparent Connector		WW-MLB-00DJ2BB-08	≤120LEDs/M
	Strip to wire Connector	2PIN Transparent Strip to wire Connector		WW-MLB-00SE2XB-08	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-FLS102D-FD2(8mm)	≤120LEDs/M
K 54/65	Quick Connector	2PIN Transparent Connector		WW-MLB-00DJ2BB-8K	≤120LEDs/M
	Strip to wire Connector	2PIN Transparent Strip to wire Connector		WW-MLB-00DJ2XB-8K	≤120LEDs/M
F 65	/	/	/	/	/
E 67	/	/	/	/	/
R 67	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2R-SW02T-08-300(22)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2R-SOP2T-08	≤120LEDs/M



IP Level	Category	Description	Picture	Part No.	Density
<b>RW 67</b>	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2R-SW02T-08-300(22)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2R-SOP2T-08	≤120LEDs/M
<b>RM 67</b>	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2R-SW02T-08-300(22)	≤120LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2R-SOP2T-08	≤120LEDs/M
<b>C 68</b>	/	/	/	/	/

## Packaging Diagram

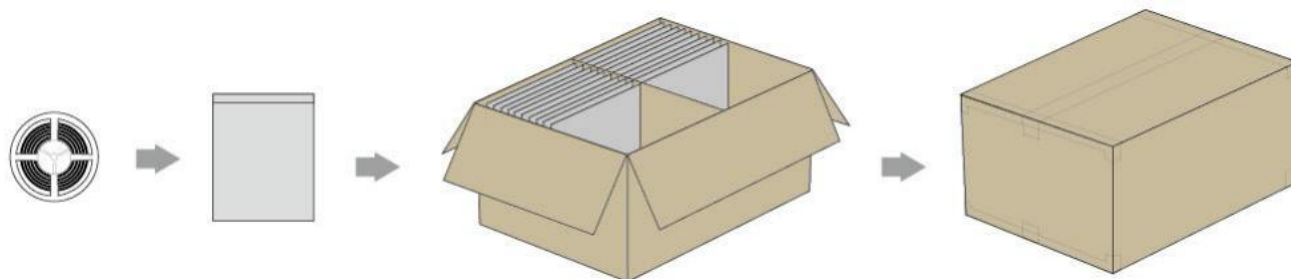











## Packaging information

















Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
<b>B 20</b>	250*270*0.14mm	/	/	440*400*260mm	60	4.35KG ±10%	7.93 KG ±10%	0.04576 m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	60	9.59Lbs ±10%	17.48Lbs ±10%	1.616 ft3
<b>D 54</b>	250*270*0.14mm	/	/	440*400*260mm	60	8.56KG ±10%	13.33KG ±10%	0.04576 m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	60	18.832Lbs ±10%	29.326Lbs ±10%	1.616 ft3
<b>S 54</b>	250*270*0.14mm	/	/	440*400*260mm	60	5.0KG ±10%	10.68KG ±10%	0.04576 m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	60	11.00 Lbs ±10%	23.50Lbs ±10%	1.616 ft3
<b>K 54/65</b>	250*270*0.14MM	/	/	440*400*260mm	50	6.946KG ±10%	13.295KG ±10%	0.05m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	50	15.313Lbs ±10%	29.310Lbs ±10%	1.62ft3
<b>F 65</b>	250*270*0.14mm	/	/	440*400*260mm	40	7.25KG ±10%	10.13KG ±10%	0.04576 m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	40	15.95Lbs ±10%	22.286Lbs ±10%	1.616 ft3
<b>E 67</b>	270*300*0.14mm	/	/	L520*W370*H300mm	36	8.28KG ±10%	13.57KG ±10%	0.0578m3
	10.63*11.81*0.0056 in	/	/	20.5*14.6*11.81in	36	18.216Lbs ±10%	29.85Lbs ±10%	2.04ft3
<b>R 67</b>	270*300*0.14mm	/	/	L520*W370*H300mm	36	6.3KG ±10%	11.73KG ±10%	0.0578m3
	10.63*11.81*0.0056 in	/	/	20.5*14.6*11.81in	36	13.89 Lbs ±10%	25.86Lbs ±10%	2.04ft3
<b>RW 67</b>	270*300*0.14mm	/	/	L520*W370*H300mm	36	6.3KG ±10%	11.73KG ±10%	0.0578m3
	10.63*11.81*0.0056 in	/	/	20.5*14.6*11.81in	36	13.89 Lbs ±10%	25.86Lbs ±10%	2.04ft3
<b>RM 67</b>	270*300*0.14mm	/	/	L520*W370*H300mm	36	3.3KG ±10%	7.33KG ±10%	0.0578m3
	10.63*11.81*0.0056 in	/	/	20.5*14.6*11.81in	36	7.26 Lbs ±10%	16.126Lbs ±10%	2.04ft3
<b>C 68</b>	270*300*0.14mm	/	/	L520*W370*H300mm	36	11.52KG ±10%	15.73KG ±10%	0.0578m3
	10.63*11.81*0.0056 in	/	/	20.5*14.6*11.81in	36	25.344Lbs ±10%	34.61Lbs ±10%	2.04ft3


### Remarks :


- Please contact our sales manager for customized package (color box, blister etc.)


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp -proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

\*\* If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

\*\*The right of final interpretation is owned by Dilux.