

Product Specification

SMD LV Strip PRO 2835 24V 210 LEDs/M Single color Green Rendering Lighting

WW-FLS102T28SW210X-24(WCP)-SR-PG-ME
&
WW-FLS102T28SW210X-24(WCP)-SR-PG-ME-EP

Apply to ERP Regulation (EU) 2019/2020



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)




Fax : (852) 3152 3039






Tel : (86) 755 8601 9190

Fax : (86) 755 8601 9197

<p>Product Features</p> <ul style="list-style-type: none"> • High quality FPC, authentic 3M tape; • Self-encapsulated design 2835 LED; • Light source lifetime:36K hours(L70); • Meet (EU)2019/2020 ErP regulations. • Min. Bending Diameter: Φ60mm • Max. length(M): 5M 	
<p>Technology info</p> <ul style="list-style-type: none"> • Lighting Technology: LED • DLS or NDLS: NDLS • MLS or NMLS: NMLS 	<p>Certification Standards</p> <ul style="list-style-type: none"> • EN55015:2019 • EN61547:2009 • EN60598-1:2015 • EN60598-2-20:2015 • EN62493:2015 • EN62471:2008

Non-ErP Waterproof Type	 B 20	 F 65	 R 67
	Naked Strip	Silicone Tube	Silicone Extrusion
	3 Years Warranty	3 Years Warranty	3 Years Warranty

ErP Waterproof Type	 B 20	 F 65	 R 67
	Naked Strip	Silicone Tube	Silicone Extrusion
	3 Years Warranty	3 Years Warranty	3 Years Warranty

迪亞士

Dilux

WW-FLS102T28SW210X-24(WCP)-SR-PG-ME

Parameters for non-ErP

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	PPE (umol/J)	Rated voltage
B 20	WW-FLS102T28SW210B-24(WCP)-SR-PG-ME	95	96	102	13.09	14.4	Standard White	4800-5200K	/	1460	1.8	DC 24V
F 65	WW-FLS102T28SW210F-24(WCP)-SR-PG-ME	95	96	102	13.09	14.4	Standard White	4800-5200K	/	1430	1.7	DC 24V
R 67	WW-FLS102T28SW210R-24(WCP)-SR-PG-ME	95	96	102	13.09	14.4	Standard White	4800-5200K	/	1390	1.6	DC 24V

Remarks:

- * The above color temperature is the color temperature of LED source.
- The typ. Luminous flux tolerance range is $\pm 10\%$ (subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.
- The above technical data, including typical power are based on the test of 0.5m.

WW-FLS102T28SW210X-24(WCP)-SR-PG-ME-EP Parameters for ErP

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	PPE (umol/J)	Rated voltage
B 20	WW-FLS102T28SW210B-24(WCP)-SR-PG-ME-EP	95	96	102	13.40	14.74	Standard White	5000K	1490	111	E	1.8	DC 24V
F 65	WW-FLS102T28SW210F-24(WCP)-SR-PG-ME-EP	95	96	102	13.40	14.74	Standard White	5000K	1450	108	F	1.7	DC 24V
R 67	WW-FLS102T28SW210R-24(WCP)-SR-PG-ME-EP	95	96	102	13.40	14.74	Standard White	5000K	1410	105	F	1.6	DC 24V

Remarks:

- *The above color temperature is the color temperature of LED source.

Test condition of above technical data:


- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.

ErP Note:


- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power \leq Pon +5% ;
- Measured lumen \geq Useful luminous flux -10%;
- Measured CRI \geq Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

Spectrum

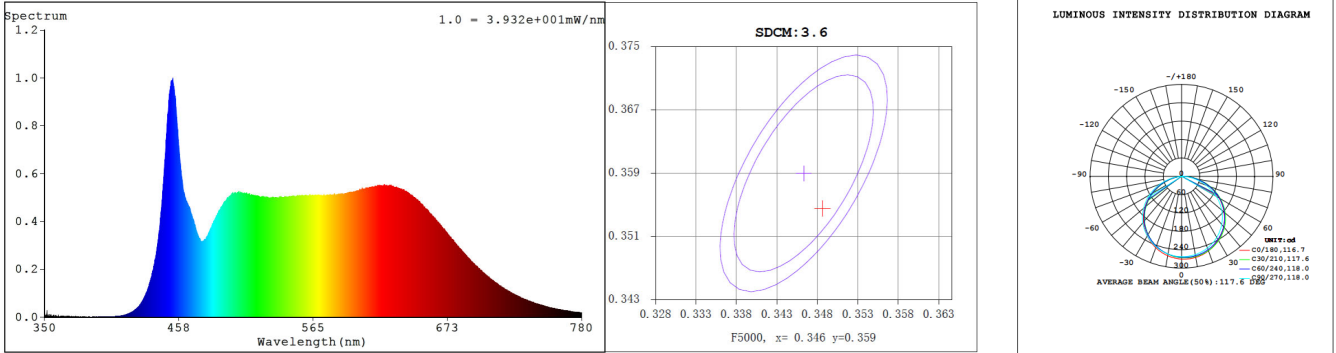

Dimension Drawing

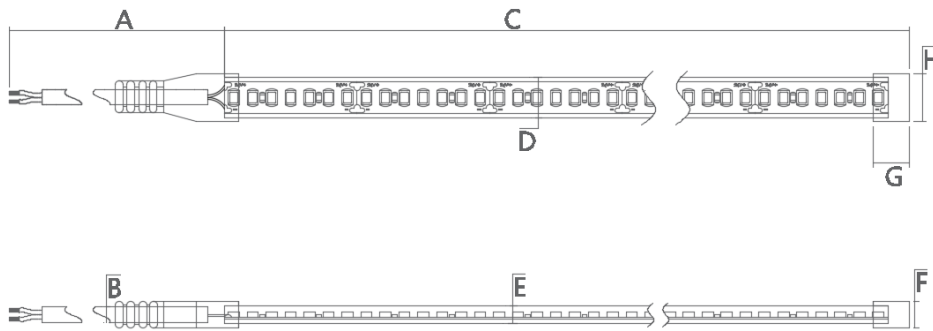


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Cap thickness	G End cap length	H Cap width
E20	300±10mm	Φ4.0±0.2mm	5000±50mm	8±0.5mm	1.2±0.2mm	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.32±0.02in	0.047±0.02in	/	/	/
F65	300±10mm	Φ4.0±0.2mm	5020±50mm	10±0.5mm	4.0±0.5mm	6±1mm	11±0.5mm	12±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.39±0.02in	0.16±0.02in	0.236±0.039in	0.43±0.02in	0.47±0.02in
R67	315±10mm	Φ6.0±0.2mm	5020±50mm	10±0.5mm	4.5±0.5mm	7±1mm	11±0.5mm	12±0.5mm
	12.40±0.39in	0.236±0.008in	197.64±1.97in	0.39±0.02in	0.18±0.02in	0.28±0.039in	0.43±0.02in	0.47±0.02in

Remarks:

- If you need further information, please contact our sales manager.

Circuit Diagram

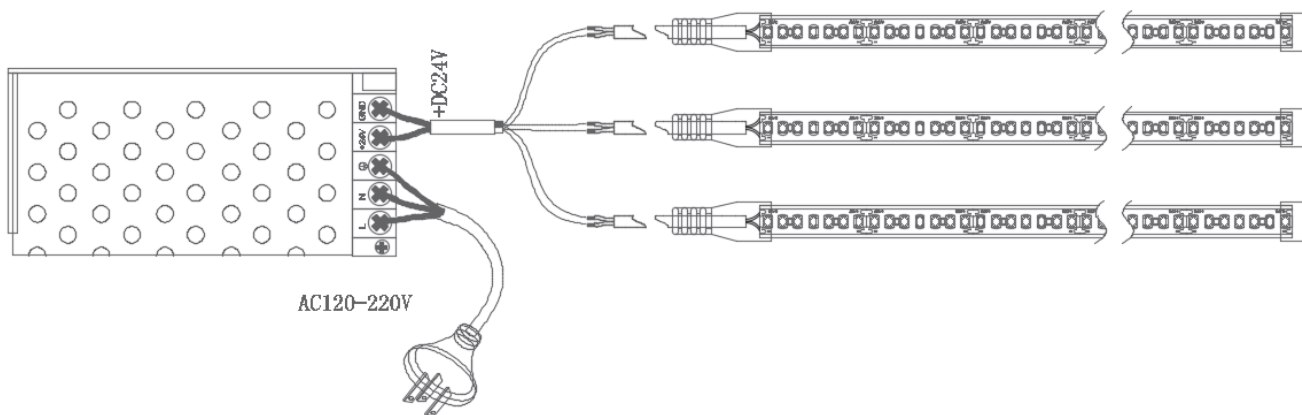


Standard Accessories

IP Grade	Category	Description	Picture	Part No.	Application
B 20	/	/	/	/	/
	/	/	/	/	/
F 65	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (8mm)	8mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
R 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW(10mm)	8mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip

Optional Accessories

IP Grade	Category	Description	Picture	Part No.	Application
B 20	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-POP20-08	≤240LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-P0W20-08	≤240LEDs/M

Packaging Diagram

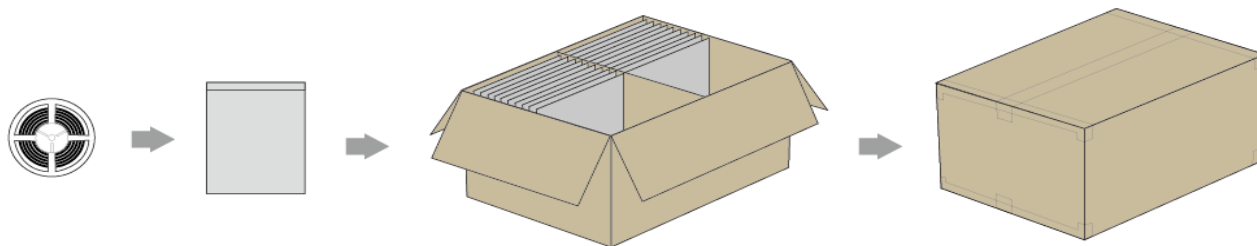











Packaging Information

















IP Grade	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
B 20	250*270*0.14mm	/	/	440*400 *260mm	60	6.18 KG ±10%	10.61 KG ±10%	0.05m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75 *10.24 in	60	13.62 Lbs ±10%	23.39 Lbs ±10%	1.62ft³
F 65	250*270*0.14mm	/	/	440*400 *260mm	40	7.71 KG ±10%	12.26 KG ±10%	0.06m³
	9.84*10.63*0.0056 in	/	/	17.32*15.75 *10.24 in	40	17.00 Lbs ±10%	27.03Lbs ±10%	2.04ft³
R 67	270*300*0.14mm	/	/	520*370 *300mm	36	11.87 KG ±10%	16.86 KG ±10%	0.06m³
	10.63*11.81*0.0056 in	/	/	20.47*14.57 *11.81 in	36	26.17 Lbs ±10%	37.17Lbs ±10%	2.04ft³


Remarks :


Please contact our sales manager for customized package (color box, blister etc.)


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.**
****The right of final interpretation is owned by Dilux.**