

Product Specification

SMD LV Strip

PRO 2835 24V 100 LEDs/m Single color Short Cutting

WW-FLS102T23XW100X-24(WCP)-XR-HQ5-CV-HE
&
WW-FLS102T28XW100X-24(WCP)-XR-HQ5-CV-HE-EP

Apply to ERP Regulation (EU) 2019/2020



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039







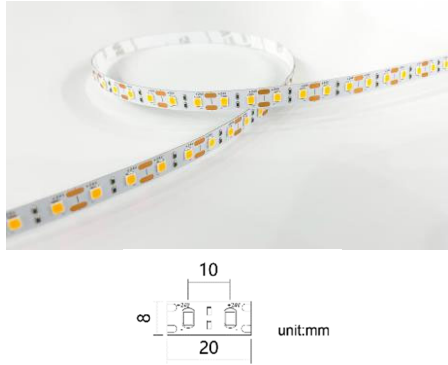

Tel : (86) 755 8601 9190



Fax : (86) 755 8601 9197

<p>Product Features</p> <ul style="list-style-type: none"> • High quality FPC, authentic 3M tape; • Self-encapsulated design 2835 LED; • Light source lifetime:50K hours(L70); • Meet (EU)2019/2020 ErP regulations. • Cutting unit as short as 20mm • Min. Bending Diameter: Φ60mm • Max. length(M): 5M 	
<p>Technology info</p> <ul style="list-style-type: none"> • Lighting Technology: LED • DLS or NDLS: NDLS • MLS or NMLS: NMLS 	<p>Certification Standards</p> <ul style="list-style-type: none"> • EN55015:2019 • EN61547:2009 • EN60598-1:2015 • EN60598-2-20:2015 • EN62493:2015 • EN62471:2008

Non-ErP Waterproof Type	 B 20	 F 65	 R 67
	Naked Strip	Silicone Tube	Silicone Extrusion
	5 Years Warranty	5 Years Warranty	5 Years Warranty

ErP Waterproof Type	 B 20	 F 65	 R 67
	Naked Strip	Silicone Tube	Silicone Extrusion
	5 Years Warranty	5 Years Warranty	5 Years Warranty

WW-FLS102T23XW100X-24(WCP)-XR-HQ5-CV-HE

Parameters for non-ErP

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/m)	Max. Power (W/m)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
B 20	WW-FLS102T23WW100B-24(WCP)-HR-HQ5-CV-HE	80	82	96	8.73	9.60	Warm White	2600-2900K	/	1260	DC 24V
	Warm White						2900-3200K	/	1300		
	Natural White						3700-4250K	/	1380		
	Standard White						5700-6500K	/	1350		
90	WW-FLS102T23WW100B-24(WCP)-UR-HQ5-CV-HE	90	90	100	8.73	9.60	Warm White	2600-2900K	/	1060	DC 24V
	Warm White						2900-3200K	/	1130		
	Natural White						3700-4250K	/	1150		
	Standard White						5700-6500K	/	1160		
F 65	WW-FLS102T23WW100F-24(WCP)-HR-HQ5-CV-HE	80	82	96	8.73	9.60	Warm White	2600-2900K	/	1200	DC 24V
	Warm White						2900-3200K	/	1240		
	Natural White						3700-4250K	/	1310		
	Standard White						5700-6500K	/	1280		
90	WW-FLS102T23WW100F-24(WCP)-UR-HQ5-CV-HE	90	90	100	8.73	9.60	Warm White	2600-2900K	/	1010	DC 24V
	Warm White						2900-3200K	/	1080		
	Natural White						3700-4250K	/	1090		
	Standard White						5700-6500K	/	1100		
R 67	WW-FLS102T23WW100R-24(WCP)-HR-HQ5-CV-HE	80	82	96	8.73	9.60	Warm White	2600-2900K	/	1190	DC 24V
	Warm White						2900-3200K	/	1230		
	Natural White						3700-4250K	/	1290		
	Standard White						5700-6500K	/	1260		
90	WW-FLS102T23WW100R-24(WCP)-UR-HQ5-CV-HE	90	90	100	8.73	9.60	Warm White	2600-2900K	/	1000	DC 24V
	Warm White						2900-3200K	/	1070		
	Natural White						3700-4250K	/	1080		
	Standard White						5700-6500K	/	1090		

Remarks:

- * The above color temperature is the color temperature of LED source.
- The typ. Luminous flux tolerance range is ±10% (subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.
- The above technical data, including typical power are based on the test of 0.5m.

WW-FLS102T23XW100X-24(WCP)-XR-HQ5-CV-HE-EP

Parameters for ErP

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/m)	Max. Power (W/m)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Efficiency (Lm/W)	Energy Efficiency class	Rated voltage
	WW-FLS102T23WW100B-24(WCP)-HR-HQ5-CV-HE-EP	80	82	96	9.00	9.90	Warm White	2700K	1358	151	D	DC 24V
	Warm White						3000K	1412	157	D		
	Natural White						4000K	1509	168	C		
	Standard White						6000K	1477	164	C		
E 20	WW-FLS102T23WW100B-24(WCP)-UR-HQ5-CV-HE-EP	90	90	100	9.00	9.90	Warm White	2700K	1143	127	E	DC 24V
	Warm White						3000K	1240	138	D		
	Natural White						4000K	1250	139	D		
	Standard White						6000K	1261	140	D		
F 65	WW-FLS102T23WW100F-24(WCP)-HR-HQ5-CV-HE-EP	80	82	96	9.00	9.90	Warm White	2700K	1294	144	D	DC 24V
	Warm White						3000K	1348	150	D		
	Natural White						4000K	1434	159	D		
	Standard White						6000K	1401	156	D		
F 65	WW-FLS102T23WW100F-24(WCP)-UR-HQ5-CV-HE-EP	90	90	100	9.00	9.90	Warm White	2700K	1089	121	E	DC 24V
	Warm White						3000K	1186	132	E		
	Natural White						4000K	1186	132	E		
	Standard White						6000K	1197	133	E		
R 67	WW-FLS102T23WW100R-24(WCP)-HR-HQ5-CV-HE-EP	80	82	96	9.00	9.90	Warm White	2700K	1283	143	D	DC 24V
	Warm White						3000K	1337	149	D		
	Natural White						4000K	1412	157	D		
	Standard White						6000K	1380	153	D		
R 67	WW-FLS102T23WW100R-24(WCP)-UR-HQ5-CV-HE-EP	90	90	100	9.00	9.90	Warm White	2700K	1078	120	E	DC 24V
	Warm White						3000K	1175	131	E		
	Natural White						4000K	1175	131	E		
	Standard White						6000K	1175	131	E		

Remarks:

- *The above color temperature is the color temperature of LED source.

Test condition of above technical data:


- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.

ErP Note:


- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power ≤ Pon +5% ;
- Measured lumen ≥ Useful luminous flux -10%;
- Measured CRI ≥ Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

Spectrum

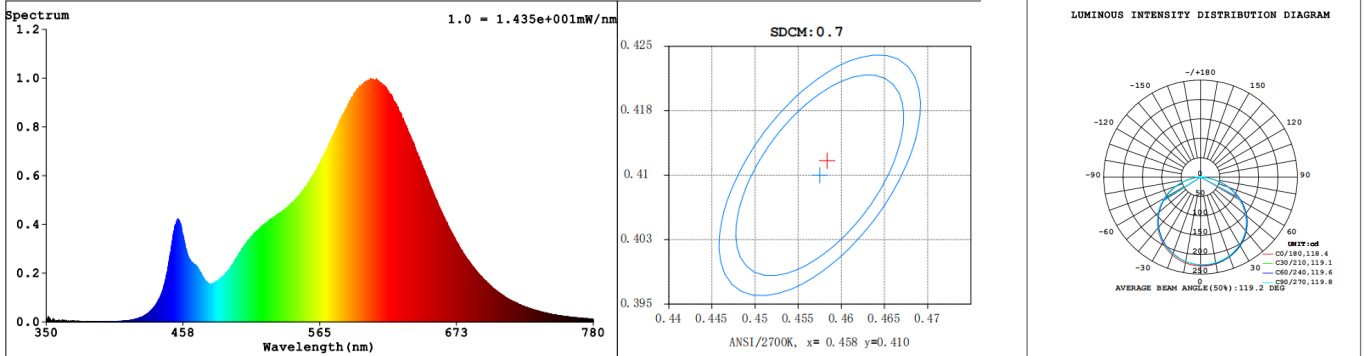

Dimension Drawing

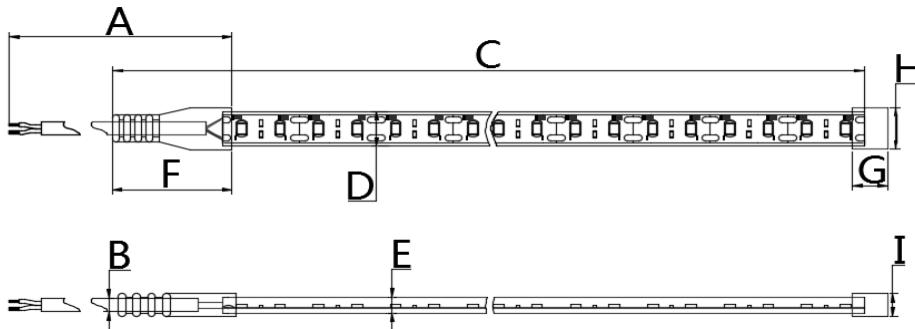


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Cap thickness	G End cap length	H Cap width
B 20	300±10mm	4±0.2mm	5000±50mm	8±0.5mm	1.2±0.5mm	/	/	/
	11.81±0.39in	0.157±0.008in	196.85±1.97in	0.31±0.02in	0.047±0.02in	/	/	/
F 65	300±10mm	4±0.2mm	5020±50mm	10±0.5mm	4.0±0.5mm	6±1mm	11±0.5mm	12±0.5mm
	11.81±0.39in	0.157±0.008in	197.64±1.97in	0.39±0.02in	0.157±0.02in	0.236±0.039in	0.43±0.02in	0.47±0.02in
R 67	315±10mm	6.0±0.2mm	5020±50mm	10±0.5mm	4.5±0.5mm	7±1mm	11±0.5mm	12±0.5mm
	12.4±0.39in	0.236±0.008in	197.64±1.97in	0.39±0.02in	0.177±0.02in	0.28±0.039in	0.43±0.02in	0.47±0.02in

Remarks:

- If you need further information, please contact our sales manager.


Circuit Diagram

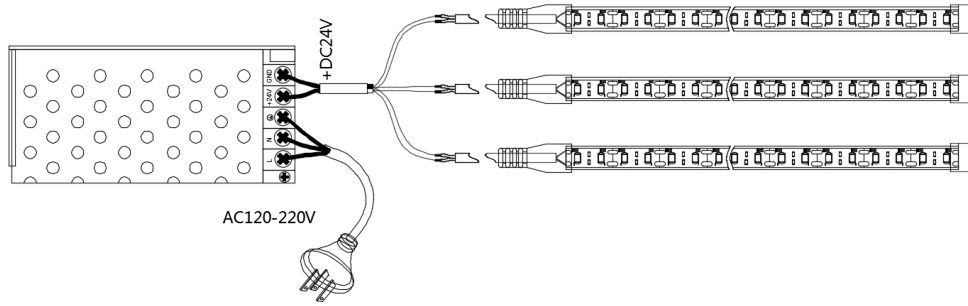

Standard Accessories

IP Grade	Category	Description	Picture	Part No.	Application
B 20	/	/	/	/	/
	/	/	/	/	/
F 65	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	10mm Type F Waterproof strip
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	
R 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (10mm)	10mm Type R Waterproof strip
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	

Packaging Diagram

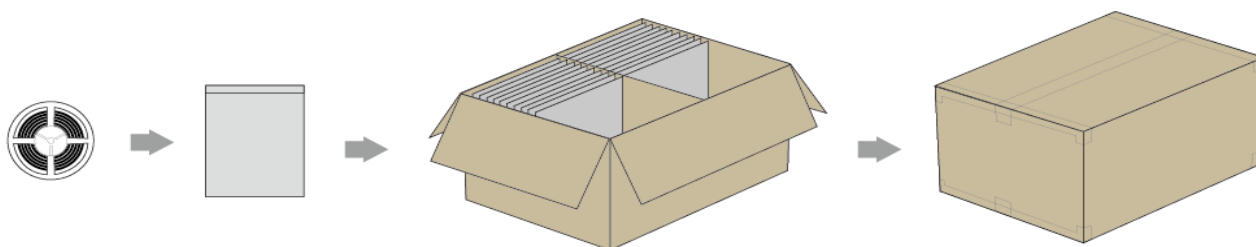











Packaging Information

















IP Grade	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
B 20	250*270*0.14mm	/	/	440*400*260mm	60	2.9KG ±10%	6.79KG ±10%	0.04576m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	60	6.39Lbs ±10%	14.97Lbs ±10%	1.616ft3
F 65	250*270*0.14mm	/	/	440*400*260mm	40	7.02KG ±10%	9.77KG ±10%	0.04576 m3
	9.84*10.63*0.0056 in	/	/	17.32*15.748*10.236 in	40	15.48Lbs ±10%	21.54Lbs ±10%	1.616 ft3
R 67	270*300*0.14mm	/	/	520*370*300mm	36	8.55KG ±10%	11.26KG ±10%	0.05772m3
	10.63*11.81*0.0056 in	/	/	20.47*14.567*11.811 in	36	18.85Lbs ±10%	24.82Lbs ±10%	2.038ft3


Remarks :


Please contact our sales manager for customized package (color box, blister etc.)


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.**
****The right of final interpretation is owned by Dilux.**