

Product Specification

SMD HV Strip

Eco 2835 AC230V 240 LEDs/M Single color Rectifier ext-w/wire

HVFLST2XPC-XX-EU-HR-EP-LD
&
HVFLST2XPC-XX-EU-HR-LD

Apply to ERP Regulation (EU) 2019/2020



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)


Fax : (852) 3152 3039







Tel : (86) 755 8601 9190



Fax : (86) 755 8601 9197

<p>Product Features</p> <ul style="list-style-type: none"> • Self-encapsulated design 2835 LED; • Light source lifetime:20K hours(L70); • Meet (EU)2019/2020 ErP regulations. • Min. Bending Diameter: Φ100mm • Max. length(M): 50M 	
<p>Technology info</p> <ul style="list-style-type: none"> • Lighting Technology: LED • DLS or NDLS: NDLS • MLS or NMLS: MLS 	<p>Certification Standards</p> <ul style="list-style-type: none"> • EN55015:2019+A11 • EN61547:2009 • EN60598-1:2015 • EN60598-2-20:2015 • EN62493:2015 • EN62471:2008

<p>Non-ErP Waterpro of Type</p>	  44
	<p>2 Years Warranty</p>

<p>ErP Waterpro of Type</p>	  44
	<p>2 Years Warranty</p>

HVFLST2XPC-XX-EU-HR-LD
Parameters for non-ErP

Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
HVFLST2WPC-10-EU-HR-LD	80	82	96	11.4	12.54	Warm White	2800-3200K	1150	AC 230V
HVFLST2NPC-10-EU-HR-LD				11.4	12.54	Natural White	3800-4200K	1220	
HVFLST2SPC-10-EU-HR-LD				11.4	12.54	Standard White	6200-6800K	1200	
HVFLST2WPC-25-EU-HR-LD	80	82	96	11.4	12.54	Warm White	2800-3200K	1150	AC 230V
HVFLST2NPC-25-EU-HR-LD				11.4	12.54	Natural White	3800-4200K	1220	
HVFLST2SPC-25-EU-HR-LD				11.4	12.54	Standard White	6200-6800K	1200	
HVFLST2WPC-50-EU-HR-LD	80	82	96	11.4	12.54	Warm White	2800-3200K	1150	AC 230V
HVFLST2NPC-50-EU-HR-LD				11.4	12.54	Natural White	3800-4200K	1220	
HVFLST2SPC-50-EU-HR-LD				11.4	12.54	Standard White	6200-6800K	1200	

Remarks:

- * The above color temperature is the color temperature of LED source.
- The typ. Luminous flux tolerance range is $\pm 10\%$ (subject to the manufacturer's instrument test).

Test methods of parameter:

- Test while turning on.
- Test 1m strip in the integrating sphere under the condition of input AC230V voltage

Test condition of above technical data:

- Surrounding temperature: 26 ℃.
- The above parameters are data of internal power supply

HVFLST2XPC-XX-EU-HR-EP-LD

Parameters for ErP

Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	Rated voltage
HVFLST2WPC-10-EU-HR-EP-LD	80	82	96	11.6	12.76	Warm White	3000K	1170	101	F	AC 230V
Natural White						4000K	1230	106	F		
Standard White						6500K	1210	104	F		
HVFLST2WPC-25-EU-HR-EP-LD	80	82	96	11.6	12.76	Warm White	3000K	1170	101	F	AC 230V
Natural White						4000K	1230	106	F		
Standard White						6500K	1210	104	F		
HVFLST2WPC-50-EU-HR-EP-LD	80	82	96	11.6	12.76	Warm White	3000K	1170	101	F	AC 230V
Natural White						4000K	1230	106	F		
Standard White						6500K	1210	104	F		

Remarks:

- *The above color temperature is the color temperature of LED source.
- The typ. Luminous flux tolerance range is $\pm 10\%$ (subject to the manufacturer's instrument test).

Test methods of parameter:

- Test after 10 mins turned on.
- Test 1m strip in the integrating sphere under the condition of input AC230V voltage


Test condition of above technical data:

- Surrounding temperature: 26 °C.
- The above parameters are data of internal power supply


ErP Note:

- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power $\leq P_{on} + 5\%$;
- Measured lumen \geq Useful luminous flux $- 10\%$;
- Measured CRI \geq Declared CRI-2
- The above technical data, including typical power are based on the test of 0.6m
- Only for industrial application.

Optical Test Diagram

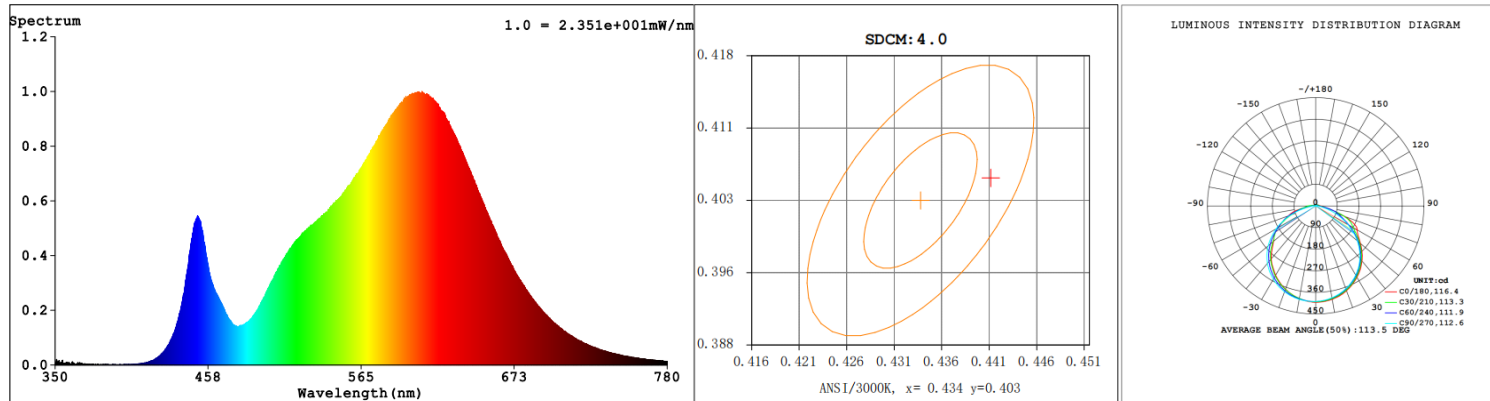



Dimension Drawing

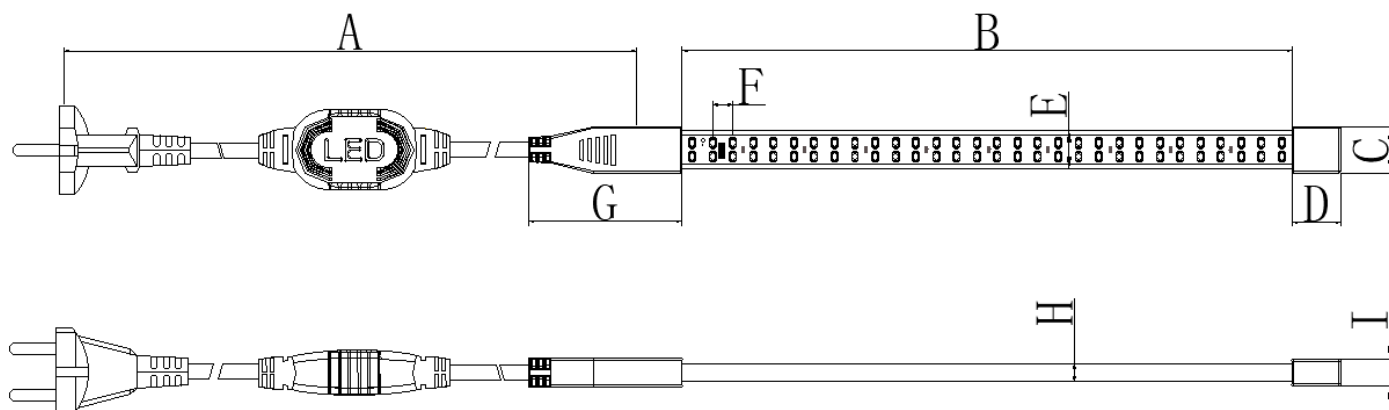


10M								
A	B	C	D	E	F	G	H	I
1550±30mm	10030±30mm	20.5±0.5mm	16±0.5mm	16.5±0.5mm	8.33±0.2mm	63±1mm	7±0.5mm	11.5±0.5mm
61.02±1.181in	394.88±1.181in	0.807±0.019in	0.629±0.019in	0.65±0.019in	0.139±0.007in	2.48±0.039in	0.275±0.019in	0.452±0.019in
25M								
A	B	C	D	E	F	G	H	I
1550±30mm	25030±30mm	20.5±0.5mm	16±0.5mm	16.5±0.5mm	8.33±0.2mm	63±1mm	7±0.5mm	11.5±0.5mm
61.02±1.181in	985.43±1.181in	0.807±0.019in	0.629±0.019in	0.65±0.019in	0.139±0.007in	2.48±0.039in	0.275±0.019in	0.452±0.019in
50M								
A	B	C	D	E	F	G	H	I
1550±30mm	50030±30mm	20.5±0.5mm	16±0.5mm	16.5±0.5mm	8.33±0.2mm	63±1mm	7±0.5mm	11.5±0.5mm
61.02±1.181in	1969.7±1.181in	0.807±0.019in	0.629±0.019in	0.65±0.019in	0.139±0.007in	2.48±0.039in	0.275±0.019in	0.452±0.019in

Remarks:
If you need further information, please contact our sales manager.

Optional Accessories

Category	Picture	Part No.	Description
Buckle		WW-HVFLST5-MC	Fixing clip and screws
Linear type Intermediate fittings		WW-HFC-ITR2T-12	Intermediate connector, upper

Packaging Diagram

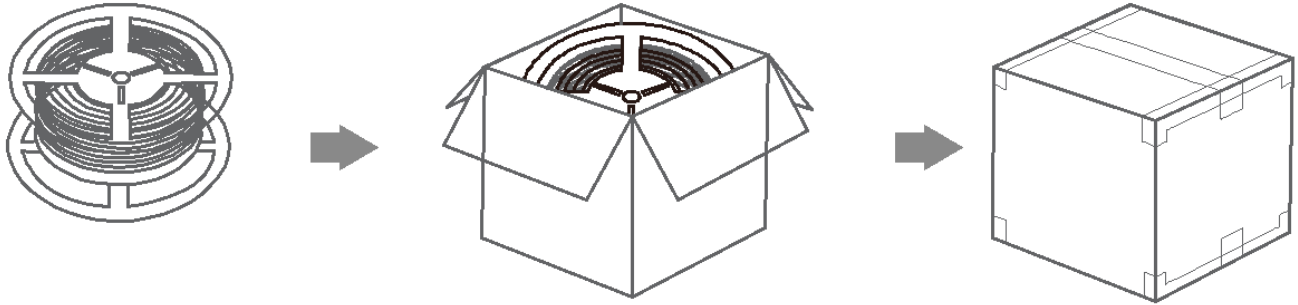

Packaging Information

Length	Reel size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
10m	240*240*90mm	/	/	260*260*110mm	1	1.47KG ±10%	1.87KG ±10%	0.00743m ³
	9.45*9.45*3.54in	/	/	10.23*10.23*4.33in	1	3.24 Lbs ±10%	4.12 Lbs ±10%	0.2623ft ³
25m	240*240*120mm	/	/	260*260*140mm	1	3.42KG ±10%	3.96KG ±10%	0.00946m ³
	9.45*9.45*4.72in	/	/	10.23*10.23*5.51in	1	7.54 Lbs ±10%	8.73 Lbs ±10%	0.3340ft ³
50m	300*300*140mm	/	/	320*320*165mm	1	6.67KG ±10%	7.38KG ±10%	0.01689m ³
	11.81*11.81*5.51in	/	/	12.60*12.60*6.50in	1	14.70 Lbs ±10%	16.26Lbs ±10%	0.5963ft ³

Remarks :

- Please contact our sales manager for customized package (color box, blister etc.)

 **Cautions**



Do not pull and crush



Connected to power supply every 30 meters



The minimum bending diameter > 150mm



Please follow the user manual for installation



Operate carefully to avoid electric shock



Power supply retain > 20%



Note the positive and negative poles



Do not press the surface of LED



Only can be used in wet place, do not contact with water directly



No direct sunlight



Do not put plug, bridge rectifier, front and end cap into water



Pay attention to the power and ensure that the power supply wire is not overload



Ensure the output rated voltage operate within $\pm 5\%$



Twist angle > 45°



Operated by professionals



Ensure circuit protector for the electric circuit



The continuous working time do not exceed 12 hours daily



Storage temperature
0°C ~ +60°C
(32°F ~ +140°F)



Operating temperature
-20°C ~ +45°C
(-4°F ~ +113°F)



Relative humidity
40%~70%



Storage life is within 6 months



Defective product photo should be provided for warranty



For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.).The environment in which includes strong acid and strong base.



During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

Factory will not be responsible for warranty if product failure happens because of incorrect installation, incorrect use, man-made damage or irresistible external forces (Earthquake, Typhoon, Tsunami, Tornado, etc.)

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

**The right of final interpretation is owned by Dilux.