

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:4.880m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	150.7	149.1	148.7	149.1	152.6	149.7	148.7	147.6	0- 10	14.36	14.36	2.51,2.51
20	143.9	142.7	142.2	143.6	147.4	143.9	142.2	140.8	10- 20	41.46	55.82	9.76,9.76
30	134.0	132.6	131.4	134.2	138.5	134.2	131.5	130.0	20- 30	63.92	119.7	20.9,20.9
40	122.3	119.2	116.4	121.1	127.0	120.9	116.5	115.4	30- 40	79.40	199.1	34.8,34.8
50	108.9	103.5	97.18	105.1	114.1	104.9	97.23	99.96	40- 50	86.44	285.6	50,50
60	95.27	85.81	73.92	87.56	99.71	87.29	73.66	82.94	50- 60	84.40	370.0	64.7,64.7
70	82.65	68.48	47.28	69.38	85.69	69.13	46.56	65.47	60- 70	74.65	444.6	77.8,77.8
80	64.98	51.18	20.02	54.69	73.48	54.12	19.61	40.24	70- 80	59.99	504.6	88.3,88.3
90	35.05	24.72	1.755	36.61	55.58	35.64	1.308	25.18	80- 90	41.54	546.2	95.5,95.5
100	1.266	1.051	0.6479	9.965	30.74	9.836	0.6644	1.266	90-100	17.01	563.2	98.5,98.5
110	1.028	0.9187	0.7883	1.500	1.186	0.9655	0.8355	1.063	100-110	2.995	566.2	99,99
120	1.173	1.099	0.9711	1.107	1.098	1.023	1.024	1.210	110-120	1.092	567.3	99.2,99.2
130	1.304	1.260	1.143	1.152	1.253	1.201	1.206	1.359	120-130	1.077	568.3	99.4,99.4
140	1.419	1.383	1.310	1.306	1.383	1.352	1.367	1.519	130-140	1.025	569.4	99.6,99.6
150	1.531	1.518	1.473	1.467	1.503	1.491	1.523	1.612	140-150	0.9139	570.3	99.8,99.8
160	1.647	1.643	1.617	1.611	1.636	1.620	1.664	1.728	150-160	0.7347	571.0	99.9,99.9
170	1.754	1.755	1.756	1.790	1.755	1.735	1.780	1.832	160-170	0.4860	571.5	100,100
180	1.825	1.811	1.846	1.897	1.824	1.811	1.846	1.890	170-180	0.1733	571.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:4.880m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

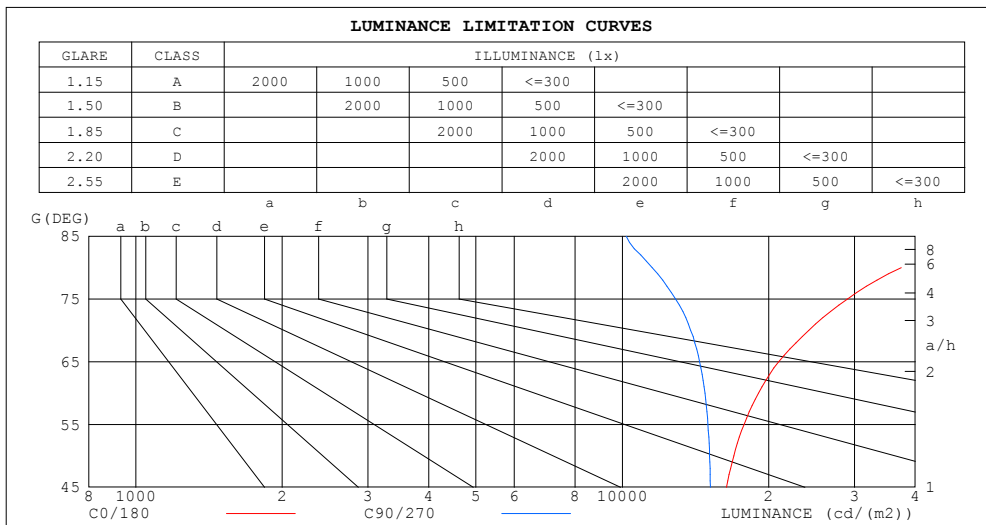

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	59817	10184
80	37420	11527
75	29016	12865
70	24165	13824
65	20971	14421
60	19055	14785
55	17796	15000
50	16948	15119
45	16369	15175


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 65.0%
 Test Distance: 4.880m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

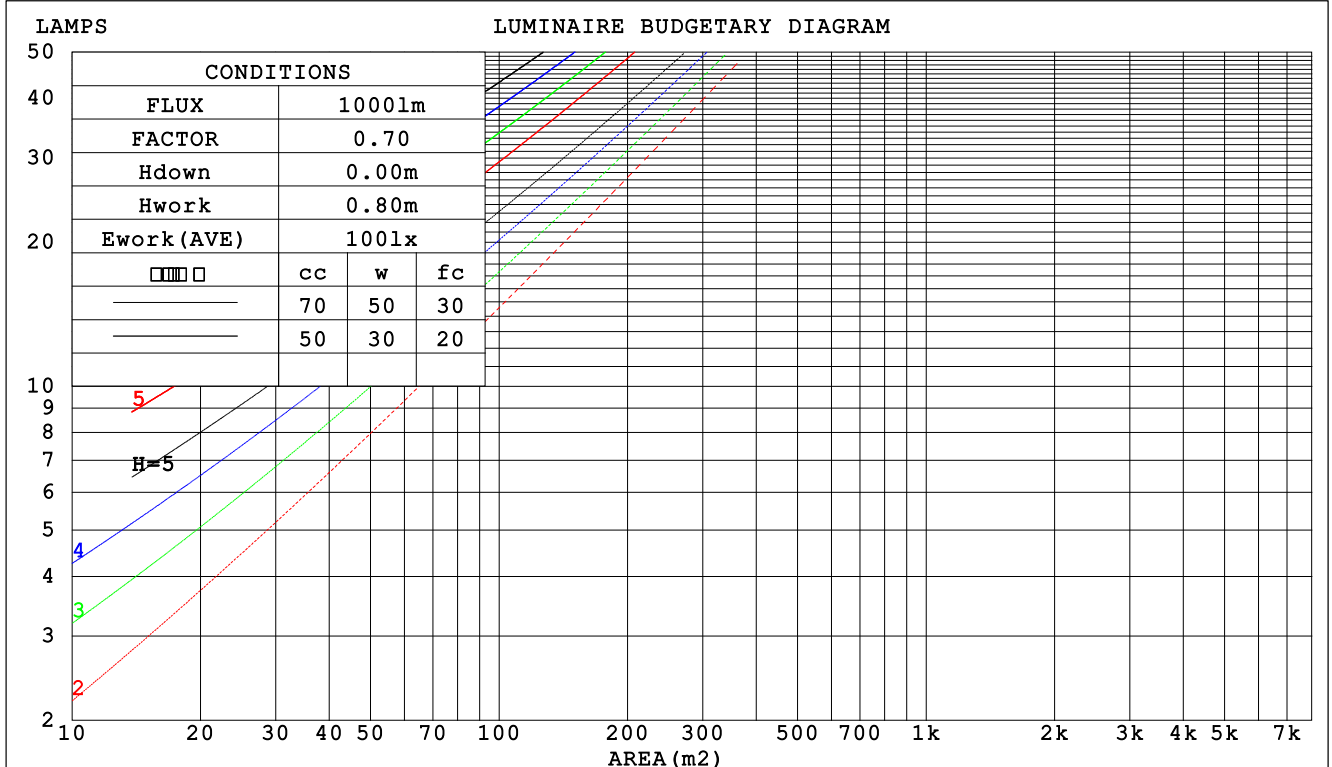

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-07

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:4.880m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.388 .221 .070	.379 .216 .069	.363 .208 .067	.348 .201 .064	.335 .194 .063	
2.0	.339 .186 .057	.331 .182 .056	.317 .176 .055	.303 .170 .053	.291 .165 .052	
3.0	.302 .161 .048	.295 .158 .048	.282 .153 .046	.270 .148 .045	.259 .143 .044	
4.0	.272 .141 .042	.266 .139 .041	.255 .135 .040	.244 .131 .039	.234 .127 .039	
5.0	.248 .126 .037	.242 .124 .036	.232 .121 .036	.222 .117 .035	.213 .114 .034	
6.0	.227 .114 .033	.222 .112 .032	.213 .109 .032	.204 .106 .031	.196 .103 .031	
7.0	.209 .103 .029	.205 .102 .029	.196 .099 .029	.189 .097 .028	.181 .094 .028	
8.0	.194 .095 .027	.190 .094 .026	.183 .091 .026	.175 .089 .026	.169 .087 .025	
9.0	.181 .087 .024	.177 .086 .024	.170 .084 .024	.164 .082 .024	.158 .080 .023	
10.0	.169 .081 .023	.166 .080 .022	.160 .078 .022	.154 .076 .022	.148 .075 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.224 .224 .224	.192 .192 .192	.131 .131 .131	.075 .075 .075	.024 .024 .024	
1.0	.220 .190 .162	.188 .163 .140	.129 .112 .097	.074 .065 .056	.024 .021 .018	
2.0	.213 .166 .127	.182 .143 .110	.125 .099 .076	.072 .058 .045	.023 .019 .015	
3.0	.205 .149 .104	.176 .129 .091	.121 .089 .064	.070 .052 .037	.022 .017 .012	
4.0	.197 .136 .090	.169 .118 .078	.116 .082 .055	.067 .048 .032	.022 .016 .011	
5.0	.189 .126 .080	.163 .109 .069	.112 .076 .049	.065 .045 .029	.021 .015 .010	
6.0	.182 .118 .072	.156 .102 .063	.108 .072 .045	.063 .042 .026	.020 .014 .009	
7.0	.175 .111 .067	.150 .096 .058	.104 .068 .041	.060 .040 .025	.019 .013 .008	
8.0	.168 .106 .063	.144 .092 .055	.100 .064 .039	.058 .038 .023	.019 .012 .008	
9.0	.161 .101 .060	.139 .087 .052	.096 .061 .037	.056 .036 .022	.018 .012 .007	
10.0	.155 .096 .057	.134 .084 .050	.093 .059 .035	.054 .035 .021	.018 .011 .007	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:4.880m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LED Strip					TYPE: Indoor lighting			WEIGHT: 20g			
SPEC.: COB LED					DIM.: 500*10*1.9mm			SERIAL No.: 20220507007			
MFR.: EVERFINE					SUR.: 500*10*1.9mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.8	26.4	25.1	26.6	27.0	23.7	25.3	24.0	25.6	25.9
	3H	27.4	28.8	27.7	29.2	29.5	25.3	26.8	25.7	27.1	27.5
	4H	28.8	30.2	29.2	30.5	30.9	26.0	27.4	26.4	27.7	28.1
	6H	30.3	31.6	30.7	32.0	32.3	26.5	27.8	26.9	28.2	28.6
	8H	31.0	32.3	31.4	32.7	33.1	26.7	28.0	27.1	28.3	28.7
	12H	31.8	33.1	32.2	33.4	33.8	26.8	28.0	27.2	28.4	28.8
4H	2H	25.5	26.9	25.8	27.2	27.6	24.6	26.0	25.0	26.4	26.7
	3H	28.3	29.5	28.7	29.9	30.3	26.5	27.8	27.0	28.2	28.6
	4H	29.9	31.0	30.3	31.5	31.9	27.4	28.5	27.8	28.9	29.4
	6H	31.6	32.6	32.1	33.0	33.5	28.1	29.1	28.5	29.5	30.0
	8H	32.5	33.4	32.9	33.9	34.4	28.3	29.3	28.8	29.7	30.2
	12H	33.4	34.3	33.9	34.7	35.2	28.5	29.4	29.0	29.9	30.4
8H	4H	30.3	31.3	30.8	31.7	32.2	28.3	29.2	28.8	29.7	30.2
	6H	32.3	33.1	32.8	33.6	34.1	29.3	30.1	29.8	30.6	31.2
	8H	33.3	34.1	33.9	34.6	35.1	29.8	30.5	30.3	31.0	31.5
	12H	34.5	35.1	35.0	35.7	36.3	30.1	30.7	30.6	31.3	31.9
12H	4H	30.3	31.2	30.8	31.7	32.2	28.5	29.4	29.0	29.9	30.4
	6H	32.4	33.1	32.9	33.7	34.2	29.8	30.5	30.3	31.0	31.6
	8H	33.6	34.2	34.1	34.7	35.3	30.3	31.0	30.9	31.5	32.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117, 571.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.9)
Area: 0.01 m2


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:4.880m [K=1.0000]
Remarks:

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:4.880m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

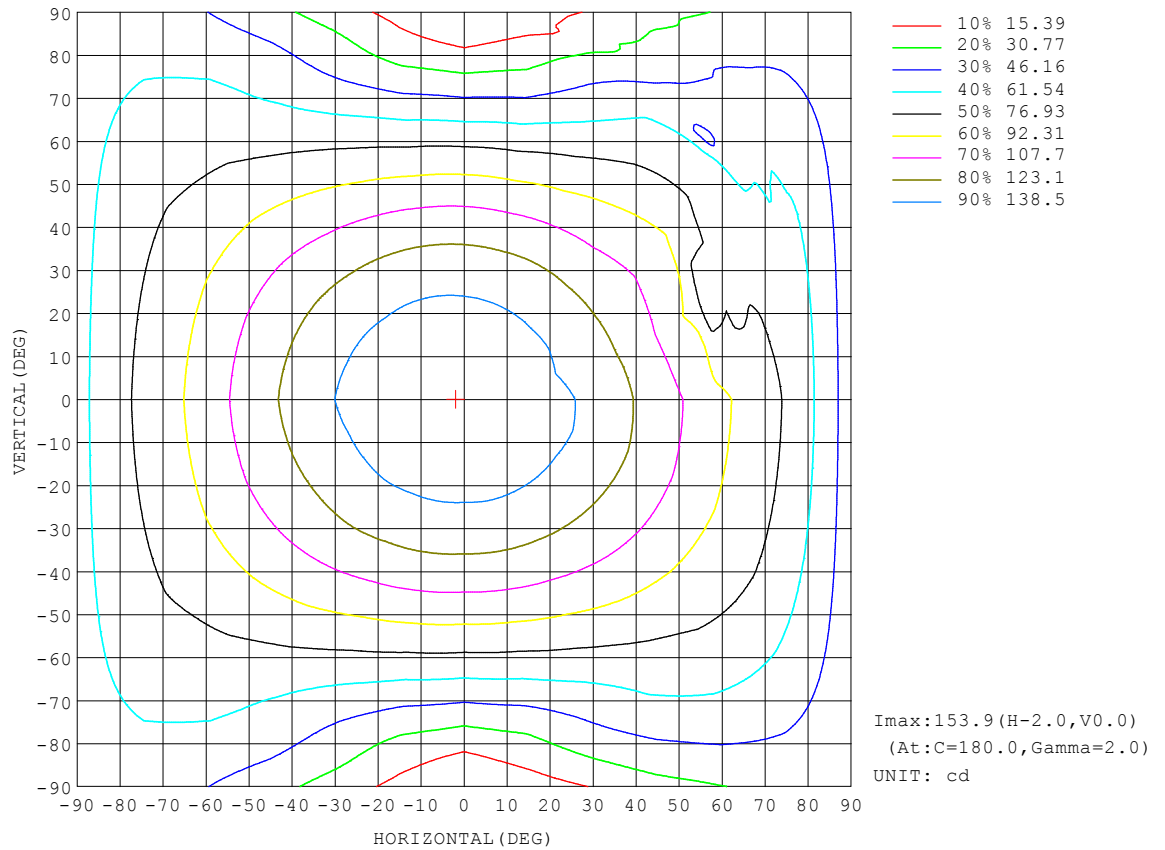


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:4.880m [K=1.0000]
Remarks:

AAI Figure

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

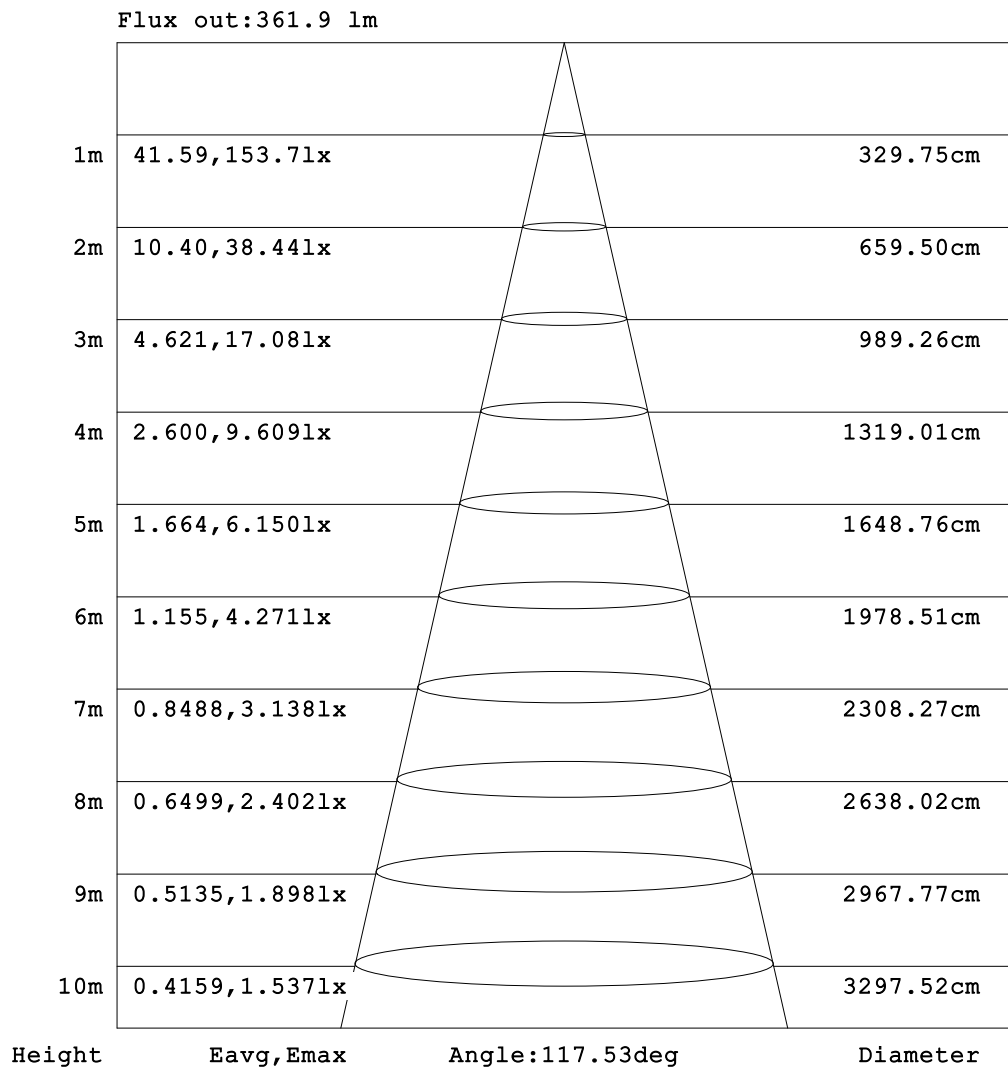


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:4.880m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

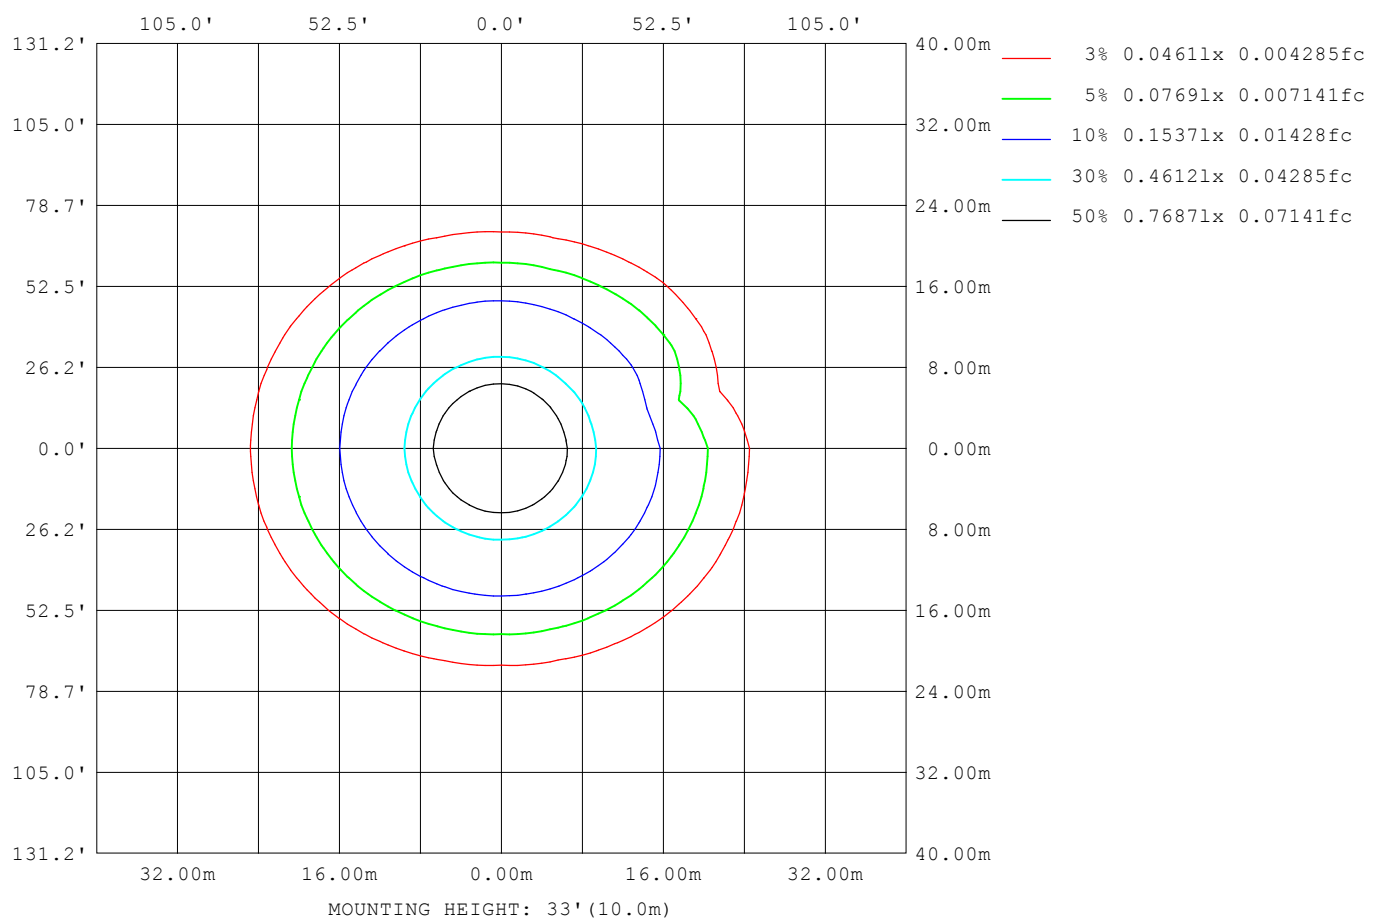

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 65.0%
 Test Distance: 4.880m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21435
L_0~180 (75) av	29902
L_0~180 (85) av	67556
L_90~270 (65) av	14341
L_90~270 (75) av	12772
L_90~270 (85) av	9876
L_45 (65) av	18195
L_45 (75) av	22930
L_45 (85) av	48131

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 65.0%
Test Distance: 4.880m [K=1.0000]
Remarks:

Planar Illuminance Curve

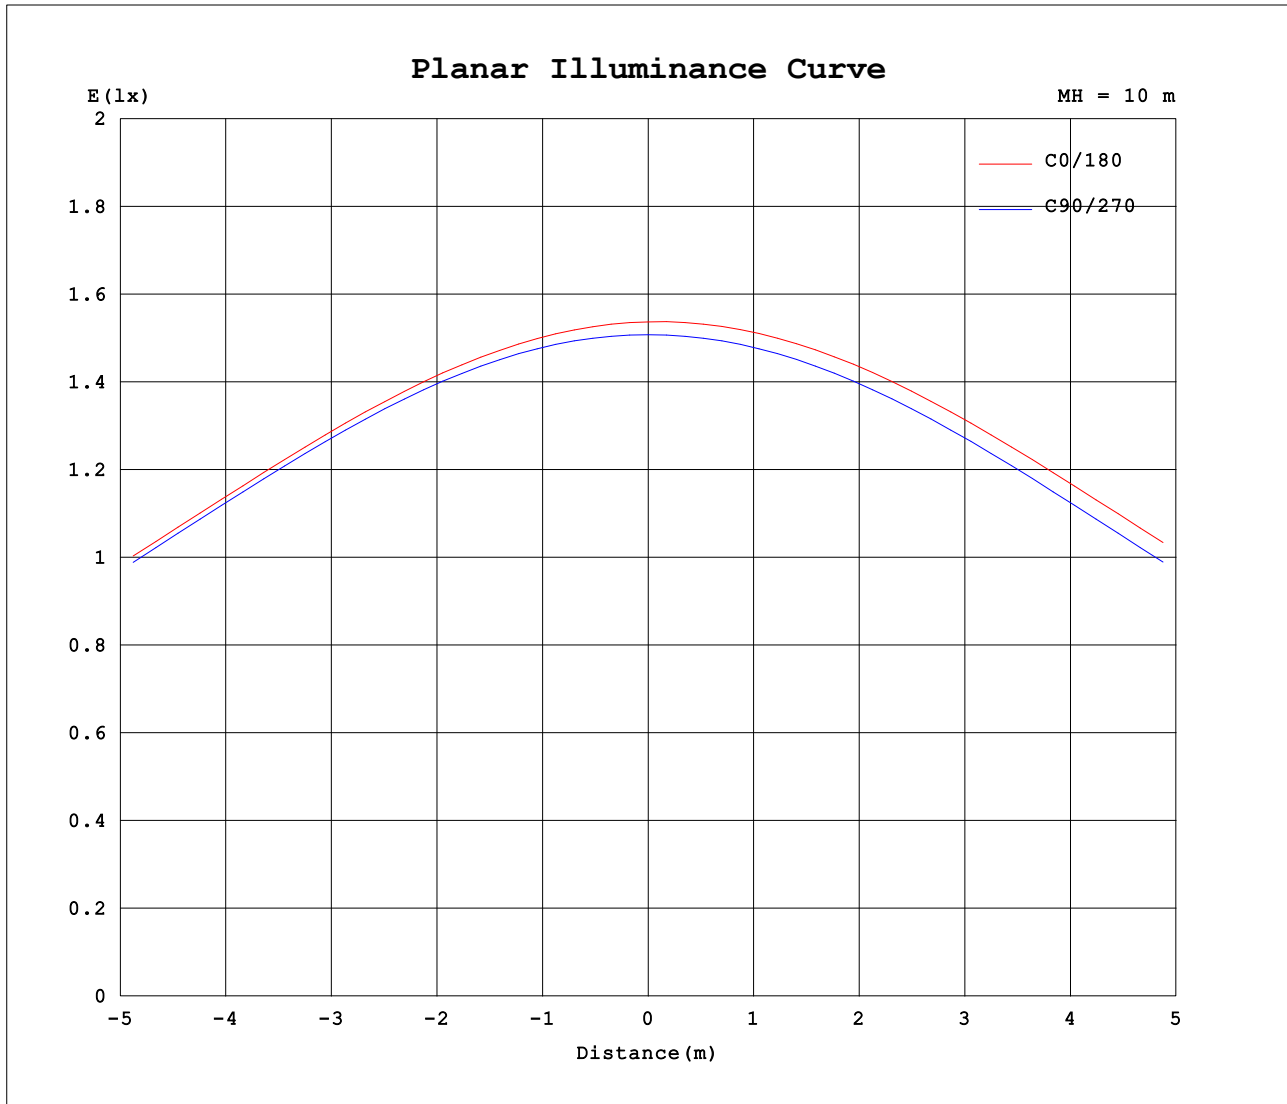

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 65.0%
 Test Distance: 4.880m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	154	153	152	151	152	151	151	151	151	150	151	152	154	153	152	151	152	151	151
5	153	152	151	151	151	151	150	150	150	150	151	152	154	153	152	151	151	151	150
10	151	151	149	149	149	149	149	149	149	149	150	150	153	151	150	150	150	149	149
15	148	148	147	146	146	146	146	146	146	147	147	148	151	149	148	147	147	147	146
20	144	144	143	143	142	142	142	143	143	144	144	145	147	146	145	144	144	143	142
25	139	140	138	138	138	138	137	138	138	139	140	141	143	142	141	140	139	138	137
30	134	134	133	133	132	132	131	132	133	134	135	136	139	137	136	134	133	132	131
35	128	129	127	126	125	125	124	125	126	128	129	131	133	131	130	128	127	126	124
40	122	123	121	119	118	117	116	117	119	121	123	125	127	125	123	121	119	118	116
45	116	116	114	112	109	108	107	109	110	113	116	119	121	119	116	113	111	109	107
50	109	109	107	104	100	98.0	97.2	98.6	101	105	109	112	114	112	109	105	101	98.5	97.2
55	102	102	98.9	94.9	90.3	87.1	86.0	87.8	91.3	96.6	101	105	107	105	102	96.3	91.2	87.5	85.9
60	95.3	94.7	91.1	85.8	80.0	75.5	73.9	76.2	80.9	87.6	93.2	97.6	99.7	97.6	93.5	87.3	80.9	75.7	73.7
65	88.6	87.7	83.4	76.9	69.3	63.1	60.9	63.7	70.3	78.3	85.3	90.4	92.6	90.3	85.5	78.1	70.2	63.2	60.3
70	82.6	81.5	76.5	68.5	58.7	50.7	47.3	51.1	59.6	69.4	77.7	83.6	85.7	83.4	77.9	69.1	59.2	50.4	46.6
75	75.1	74.0	68.9	60.8	49.4	38.3	33.3	38.7	49.6	61.4	71.1	77.6	79.7	77.2	70.9	61.0	48.9	37.9	32.8
80	65.0	63.8	58.9	51.2	40.4	27.0	20.0	27.3	41.1	54.7	64.8	71.4	73.5	70.9	64.5	54.1	40.1	26.3	19.6
85	52.1	51.2	46.4	39.2	29.0	17.5	8.88	18.6	33.6	46.8	56.8	63.3	65.6	63.1	56.7	46.2	32.7	17.4	8.34
90	35.0	34.7	30.5	24.7	16.1	7.59	1.75	10.8	23.8	36.6	46.6	53.2	55.6	52.9	46.4	35.6	23.0	9.94	1.31
95	9.49	9.49	6.17	3.23	1.22	0.81	0.67	1.55	13.6	26.2	35.7	42.4	44.7	42.1	35.8	25.2	13.3	1.39	0.63
100	1.27	1.24	1.17	1.05	0.92	0.74	0.65	0.80	1.74	9.97	20.5	27.8	30.7	27.6	21.1	9.84	1.00	0.72	0.66
105	1.09	1.06	1.01	0.92	0.83	0.74	0.69	0.76	1.36	1.80	2.88	7.21	10.6	7.21	2.46	1.03	0.87	0.75	0.74
110	1.03	1.02	0.97	0.92	0.87	0.82	0.79	0.78	0.98	1.50	1.82	2.01	1.19	1.15	1.06	0.97	0.86	0.81	0.84
115	1.10	1.10	1.05	1.02	0.94	0.92	0.88	0.87	0.87	1.27	1.60	1.75	1.08	1.07	1.02	0.95	0.91	0.90	0.93
120	1.17	1.17	1.14	1.10	1.04	1.01	0.97	0.96	0.95	1.11	1.50	1.59	1.10	1.08	1.06	1.02	1.01	0.99	1.02
125	1.24	1.23	1.20	1.19	1.12	1.09	1.05	1.05	1.04	1.08	1.39	1.53	1.18	1.16	1.15	1.12	1.10	1.09	1.12
130	1.30	1.31	1.28	1.26	1.19	1.17	1.14	1.14	1.12	1.15	1.26	1.48	1.25	1.24	1.23	1.20	1.20	1.18	1.21
135	1.36	1.37	1.34	1.32	1.27	1.25	1.23	1.23	1.21	1.23	1.25	1.36	1.32	1.31	1.30	1.28	1.28	1.27	1.29
140	1.42	1.43	1.39	1.38	1.35	1.33	1.31	1.31	1.30	1.31	1.31	1.34	1.38	1.37	1.37	1.35	1.36	1.35	1.37
145	1.47	1.49	1.46	1.45	1.42	1.41	1.39	1.39	1.38	1.39	1.39	1.38	1.44	1.43	1.44	1.42	1.43	1.43	1.45
150	1.53	1.54	1.52	1.52	1.49	1.49	1.47	1.47	1.46	1.47	1.46	1.42	1.50	1.49	1.50	1.49	1.50	1.51	1.52
155	1.59	1.60	1.58	1.58	1.56	1.56	1.55	1.55	1.53	1.54	1.54	1.51	1.57	1.55	1.57	1.56	1.57	1.58	1.60
160	1.65	1.66	1.64	1.64	1.62	1.63	1.62	1.62	1.60	1.61	1.62	1.62	1.64	1.62	1.63	1.62	1.64	1.64	1.66
165	1.70	1.71	1.70	1.70	1.69	1.70	1.70	1.72	1.67	1.68	1.68	1.72	1.70	1.68	1.68	1.68	1.70	1.71	1.73
170	1.75	1.76	1.75	1.76	1.75	1.76	1.76	1.78	1.77	1.79	1.75	1.80	1.76	1.73	1.74	1.74	1.76	1.76	1.78
175	1.80	1.80	1.79	1.80	1.79	1.81	1.81	1.83	1.84	1.85	1.87	1.89	1.80	1.78	1.79	1.79	1.80	1.80	1.83
180	1.83	1.82	1.81	1.81	1.82	1.83	1.85	1.86	1.87	1.90	1.94	2.02	1.82	1.81	1.81	1.81	1.83	1.83	1.85

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:4.880m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED Strip	TYPE: Indoor lighting	WEIGHT: 20g
SPEC.: COB LED	DIM.: 500*10*1.9mm	SERIAL No.: 20220507007
MFR.: EVERFINE	SUR.: 500*10*1.9mm	Shielding Angle:

Table--2

UNIT: cd

C (DEG) □ (DEG)	285	300	315	330	345														
0	151	151	150	151	152														
5	150	150	150	150	151														
10	148	148	148	148	148														
15	146	145	145	145	145														
20	142	141	141	141	141														
25	137	136	136	136	135														
30	131	130	130	130	130														
35	124	124	123	124	125														
40	116	116	115	118	119														
45	106	107	108	111	111														
50	96.2	97.2	100.0	104	98.6														
55	85.2	87.2	91.6	96.4	90.5														
60	73.4	77.2	82.9	88.4	66.9														
65	60.9	66.8	74.3	77.6	66.2														
70	48.0	56.4	65.5	68.2	71.3														
75	35.7	46.8	54.3	43.6	66.2														
80	24.8	36.6	40.2	50.8	60.4														
85	14.9	17.3	35.6	41.1	51.0														
90	7.46	17.0	25.2	32.0	35.5														
95	1.00	1.35	3.71	9.02	11.9														
100	0.78	1.03	1.27	1.56	1.85														
105	0.80	0.99	1.07	1.25	1.65														
110	0.88	0.97	1.06	1.15	1.60														
115	0.98	1.05	1.13	1.22	1.62														
120	1.06	1.14	1.21	1.31	1.64														
125	1.15	1.22	1.29	1.38	1.68														
130	1.23	1.30	1.36	1.48	1.61														
135	1.31	1.37	1.45	1.53	1.66														
140	1.40	1.47	1.52	1.60	1.71														
145	1.47	1.51	1.56	1.63	1.74														
150	1.54	1.58	1.61	1.68	1.81														
155	1.60	1.64	1.67	1.74	1.85														
160	1.68	1.70	1.73	1.80	1.90														
165	1.73	1.77	1.79	1.85	1.95														
170	1.78	1.82	1.83	1.89	1.99														
175	1.82	1.85	1.87	1.92	2.03														
180	1.85	1.87	1.89	1.94	2.03														

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:4.880m [K=1.0000]
Remarks: