

Product Specification

DC Flexible LED Strip

2016 7LEDs/unit Series

2016 Top LED 5mm FPC 210LEDs/M

WW-FLS102T21XW210X-24(WCP)-UR-ME

&

WW-FLS102T21XW210X-24(WCP)-UR-ME-EP



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel : (852) 3152 3059 (10 lines)

Fax : (852) 3152 3039







Tel : (86) 755 8601 9190



Fax : (86) 755 8601 9197

<p>Product Features</p> <ul style="list-style-type: none"> • High quality FPC, authentic 3M tape; • Self-encapsulated design 2016 LED; • Light source lifetime:50K hours(L70); • Meet (EU)2019/2020 ErP regulations. • Min. Bending Diameter: Φ60mm • Max. length(M): 5M 	
<p>Technology info</p> <ul style="list-style-type: none"> • Lighting Technology: LED • DLS or NDLS: NDLS • MLS or NMLS: NMLS 	<p>Certification Standards</p> <ul style="list-style-type: none"> • EN55015:2019 • EN61547:2009 • EN60598-1:2015 • EN60598-2-20:2015 • EN62493:2015 • EN62471:2008

Non-ErP Waterproof Type	 B 20	 F 65	 R 67
	Naked Strip	Silicone Tube	Silicone Extrusion
	5 Years Warranty	5 Years Warranty	5 Years Warranty

ErP Waterproof Type	 B 20
	Naked Strip
	5 Years Warranty

WW-FLS102T21XW210X-24(WCP)-UR-ME

Parameters for non-Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
E 20	WW-FLS102T21XW210B-24(WCP)-UR-ME	90	90	100	13.09	14.40	Warm White	2500K	/	1230	DC 24V
							Warm White	2700K	/	1256	
							Warm White	3000K	/	1284	
							Natural White	4000K	/	1388	
							Standard White	6000K	/	1422	
F 65	WW-FLS102T21XW210F-24(WCP)-UR-ME	90	90	100	13.09	14.40	Warm White	2500K	/	1181	DC 24V
							Warm White	2700K	/	1242	
							Warm White	3000K	/	1271	
							Natural White	4000K	/	1440	
							Standard White	6000K	/	1455	
R 67	WW-FLS102T21XW210R-24(WCP)-UR-ME	90	90	100	13.09	14.40	Warm White	2500K	/	1119	DC 24V
							Warm White	2700K	/	1267	
							Warm White	3000K	/	1231	
							Natural White	4000K	/	1380	
							Standard White	6000K	/	1395	

Remarks:

- *The above color temperature is the color temperature of LED source.
- **Indicates SDCM<3 model is available, part number will add the suffix "-3S".
- The typ. Luminous flux tolerance range is ±10% (subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.

WW-FLS102T21XW210X-24(WCP)-UR-ME-EP

Parameters for Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	Rated voltage
E 20	WW-FLS102T21XW210B-24(WCP)-UR-ME-EP	90	90	100	13.62	14.98	Warm White	2700K	1363	100	F	DC 24V
							Warm White	3000K	1393	102	F	
							Natural White	4000K	1537	113	E	
							Standard White	6000K	1561	115	E	

Remarks:

- *The above color temperature is the color temperature of LED source.
- While SDCM<3 model is available, part number will add the suffix "-3S".




Test condition of above technical data:

- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.


ErP Note:

- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power ≤ Pon +5% ;
- Measured lumen ≥Useful luminous flux -10%;
- Measured CRI ≥ Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram

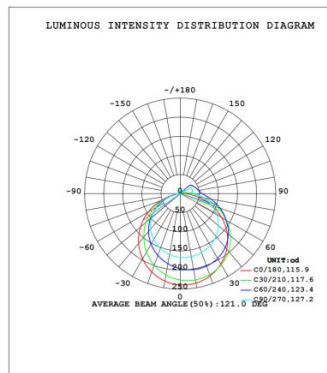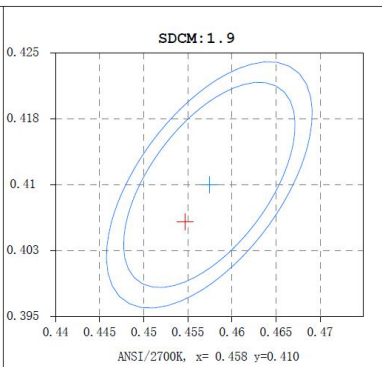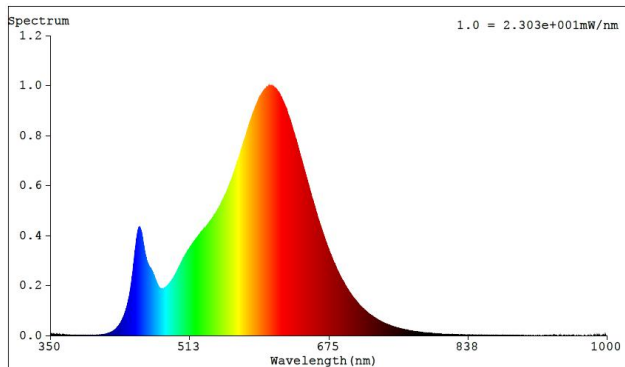

Dimension Drawing

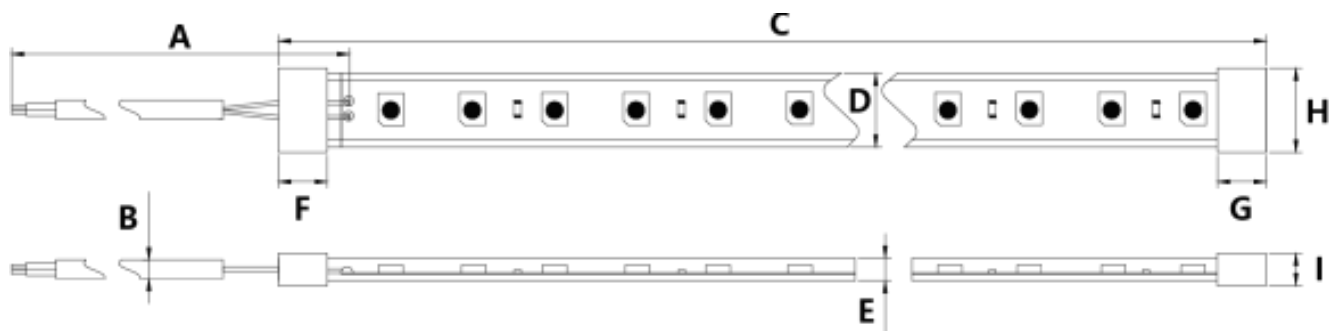


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Front cap length	G End cap length	H Cap width	I Cap thickness
E 20	300±10mm	Φ4.0±0.2mm	5000±50mm	5±0.5mm	1±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	196.85±1.97in	0.197±0.02in	0.039±0.02in	/	/	/	/
F 65	300±10mm	Φ4.0±0.2mm	5020±50mm	8.5±0.5mm	3.5±0.25mm	10±2mm	10±0.5mm	9.5±0.5mm	4.5±0.5mm
	11.81±0.39in	0.16±0.01in	197.64±1.97in	0.335±0.02in	0.138±0.01in	0.394±0.08in	0.394±0.02in	0.374±0.02in	0.177±0.02in
R 67	300±10mm	Φ5.8±0.2mm	5020±50mm	7±0.25mm	3.5±0.25mm	10±2mm	10±0.5mm	9±0.5mm	6±0.5mm
	11.81±0.39in	0.23±0.008 in	197.64±1.97in	0.275±0.01mm	0.138±0.01in	0.394±0.08in	0.394±0.02in	0.354±0.02in	0.24 ±0.02in





Remarks:

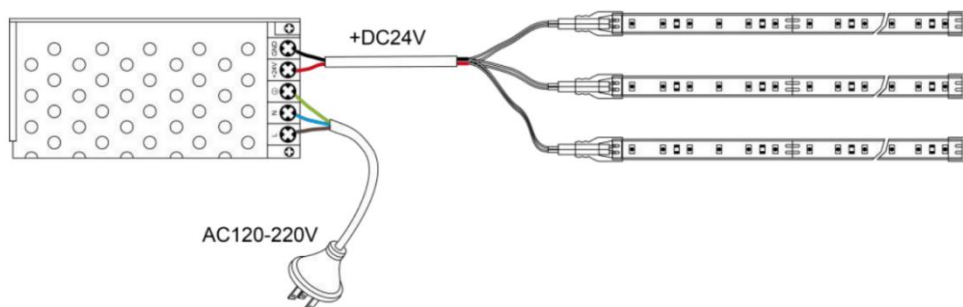- If you need further information, please contact our sales manager.


Circuit Diagram



Standard Accessories

IP Level	Category	Description	Picture	Part No.	Application
IP 20	/	/	/	/	/
	/	/	/	/	/
IP 65	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (5mm)	5mm Type F
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip
IP 67	Connection Accessories	Front cap+End cap+Cable		WW-FLS102F-CW (5mm)	5mm Type R
	Installation Accessories	Installation Buckle+Screws		WW-FLS102JJA-MC	Waterproof strip

Packaging Diagram

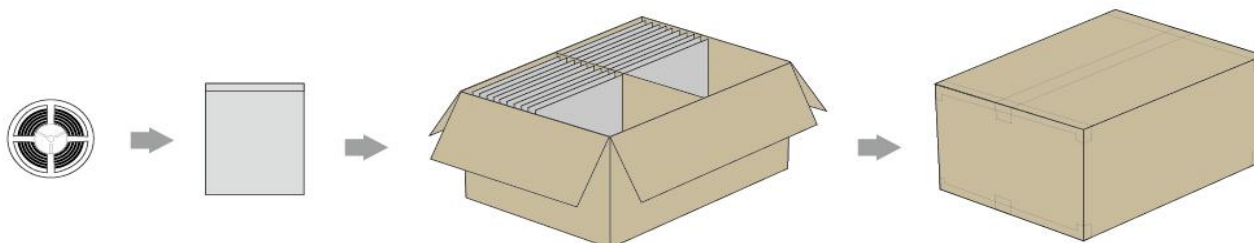











Packaging information

















Ingress protection rating	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
IP20	220*250*0.14mm	/	/	440*400 *260mm	72	3.24 KG ±10%	8.3 KG ±10%	0.04576 m3
	8.66*9.84*0.0056 in	/	/	17.32*15.748 *10.236 in	72	7.14 Lbs ±10%	18.3 Lbs ±10%	1.616 ft3
IP65	250*270*0.14MM	/	/	L440*W400*H260mm	60	7.75 KG ±10%	11.48 KG ±10%	0.0578m3
	9.84*10.63*0.0056 in	/	/	17.32*15.75*11.24in	60	17.09 Lbs ±10%	25.31 Lbs ±10%	2.04ft3
IP67	250*270*0.14MM	/	/	L440*W400*H260mm	60	10.18 KG ±10%	13.91KG ±10%	0.0578m3
	9.84*10.63*0.0056 in	/	/	17.32*15.75*11.24in	60	22.44 Lbs ±10%	30.67 Lbs ±10%	2.04ft3


Remarks :


- Please contact our sales manager for customized package (color box, blister etc.)


 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.),The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.**
****The right of final interpretation is owned by Dilux.**