

# Product Specification

## DC Flexible LED Strip

### 2835 8LEDs/unit Series

2835 Top LED 12mm FPC 160LEDs/M

WW-FLS102T29XW160X-24(WCP)-30-XR-M-CV-HE  
&  
WW-FLS102T29XW160X-24(WCP)-30-XR-M-CV-HE-EP



HK Office :

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road  
Kwun Tong, Kowloon, Hong Kong

China Factory :

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge,  
Fucheng Street, Longhua District, Shenzhen, Guangdong, China

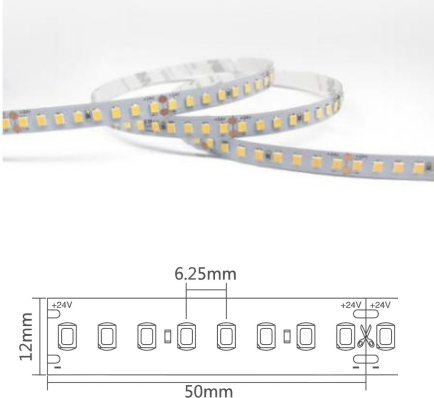
Tel : (852) 3152 3059 (10 lines)



Fax : (852) 3152 3039




Tel : (86) 755 8601 9190

Fax : (86) 755 8601 9197

<p><b>Product Features</b></p> <ul style="list-style-type: none"> <li>• High quality FPC, authentic 3M tape;</li> <li>• Self-encapsulated design 2835 LED;</li> <li>• Light source lifetime:50K hours(L70);</li> <li>• Min. Bending Diameter: Φ60mm</li> <li>• Max. length(M): 3M</li> </ul>	
<p><b>Technology info</b></p> <ul style="list-style-type: none"> <li>• Lighting Technology: LED</li> <li>• DLS or NDLS: NDLS</li> <li>• MLS or NMLS: NMLS</li> </ul>	<p><b>Certification Standards</b></p> <ul style="list-style-type: none"> <li>• EN55015:2019</li> <li>• EN61547:2009</li> <li>• EN60598-1:2015</li> <li>• EN60598-2-20:2015</li> <li>• EN62493:2015</li> <li>• EN62471:2008</li> </ul>

<b>Non-ErP Waterproof Type</b>	 <b>B 20</b>	 <b>S 54</b>
	Naked Strip	Silicone Dropping
	5 Years Warranty	3 Years Warranty

<b>ErP Waterproof Type</b>	 <b>B 20</b>
	Naked Strip
	5 Years Warranty

WW-FLS102T29XW160X-24(WCP)-30-XR-M-CV-HE

Parameters

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
B 20	WW-FLS102T29XW160B-24(WCP)-30-HR-M-CV-HE	80	82	96	23.30	25.63	Warm White	2300-2600K	/	3210	DC24V
							Warm White	2600-2900K	/	3310	
							Warm White	2900-3200K	/	3370	
							Natural White	3700-4250K	/	3600	
							Standard White	5700-6500K	/	3570	
S 54	WW-FLS102T29XW160S-24(WCP)-30-UR-M-CV-HE	90	90	100	23.30	25.63	Warm White	2300-2600K	/	2550	DC24V
							Warm White	2600-2900K	/	2760	
							Warm White	2900-3200K	/	2890	
							Natural White	3700-4250K	/	2960	
							Standard White	5700-6500K	/	3030	
S 54	WW-FLS102T29XW160S-24(WCP)-30-HR-M-CV-HE	80	82	96	23.30	25.63	Warm White	2300-2600K	/	3017	DC24V
							Warm White	2600-2900K	/	3012	
							Warm White	2900-3200K	/	3067	
							Natural White	3700-4250K	/	3024	
							Standard White	5700-6500K	/	2820	
S 54	WW-FLS102T29XW160S-24(WCP)-30-UR-M-CV-HE	90	90	100	23.30	25.63	Warm White	2300-2600K	/	2474	DC24V
							Warm White	2600-2900K	/	2567	
							Warm White	2900-3200K	/	2630	
							Natural White	3700-4250K	/	2664	
							Standard White	5700-6500K	/	2515	

Remarks:

- \*The above color temperature is the color temperature of LED source.
- \*\*Indicates SDCM<3 model is available, part number will add the suffix "-3S".
- The typ. Luminous flux tolerance range is ±15% (subject to the manufacturer's instrument test).
- This product must be equipped with aluminium profile in use, the heat radiating area >0.173m<sup>2</sup>/m.

Test condition of above technical data:

- Surrounding temperature: 26°C.
- Test while turning on.

WW-FLS102T29XW160X-24(WCP)-30-XR-M-CV-HE-EP

Parameters for ErP

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)*	Luminous Flux LM/M(39.37')	Lumen/watt	Energy Efficiency class	Rated voltage
E 20	WW-FLS102T29XW160B-24(WCP)-30-HR-M-CV-HE-EP	80	82	96	26.18	28.80	Warm White	2500K	3396	130	E	DC 24V
							Warm White	2700K	3536	135	D	
							Warm White	3000K	3622	138	D	
							Natural White	4000K	3859	147	D	
							Standard White	6000K	3816	146	D	
	WW-FLS102T29XW160B-24(WCP)-30-UR-M-CV-HE-EP	90	90	100	26.18	28.80	Warm White	2500K	2717	104	F	DC 24V
							Warm White	2700K	2965	113	E	
							Warm White	3000K	3083	118	E	
							Natural White	4000K	3169	121	E	
							Standard White	6000K	3266	125	E	

Remarks:

- \*The above color temperature is the color temperature of LED source.

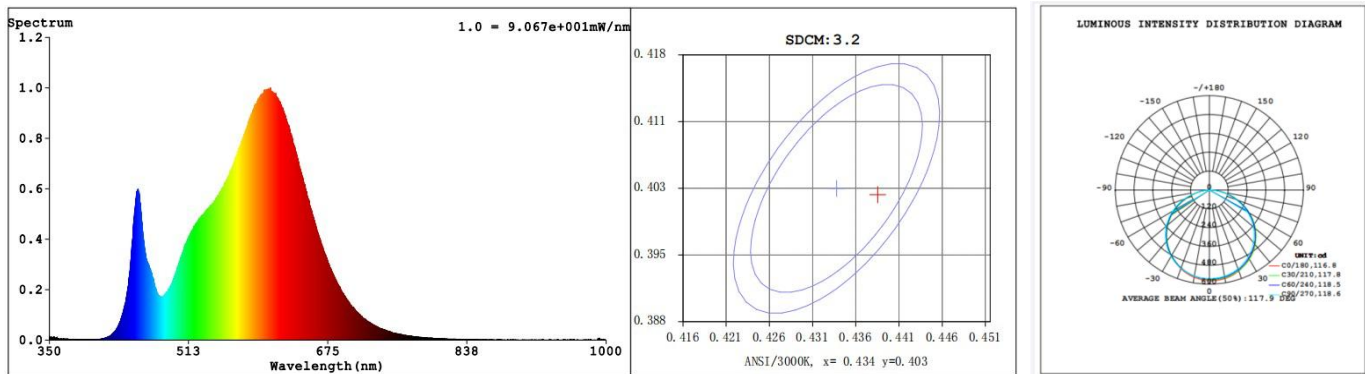
Test condition of above technical data:

- Surrounding temperature: 26 °C.
- Test after 10 mins turned on.

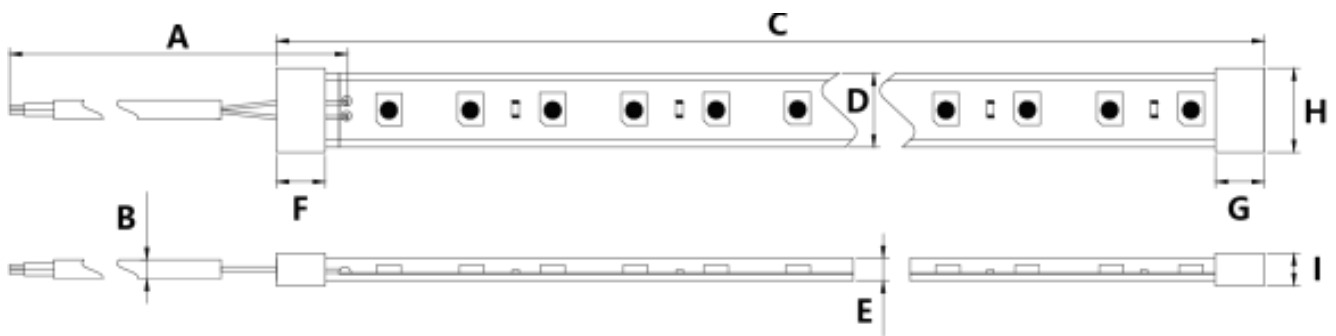
ErP Note:

- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power  $\leq$  Pon +5% ;
- Measured lumen  $\geq$  Useful luminous flux -10%;
- Measured CRI  $\geq$  Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.

Optical Test Diagram



## Dimension Drawing

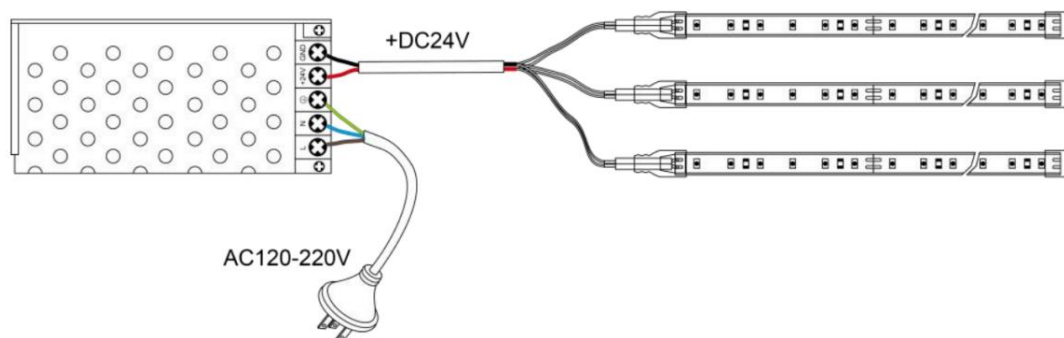


IP Grade	A Cable Length	B cable diameter	C Strip length	D Strip width	E Strip thickness	F Front cap length	G End cap length	H Cap width	I Cap thickness
E 20	300±10mm	Φ4.0±0.2mm	3000±50mm	12±0.5mm	1.2±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	118.11±1.97in	0.473±0.02in	0.047±0.02in	/	/	/	/
S 54	300±10mm	Φ4.0±0.2mm	3000±50mm	12±0.5mm	2.8±0.5mm	/	/	/	/
	11.81±0.39in	0.16±0.01in	118.11±1.97in	0.473±0.02in	0.11±0.02in	/	/	/	/



**Remarks:**

- If you need further information, please contact our sales manager.

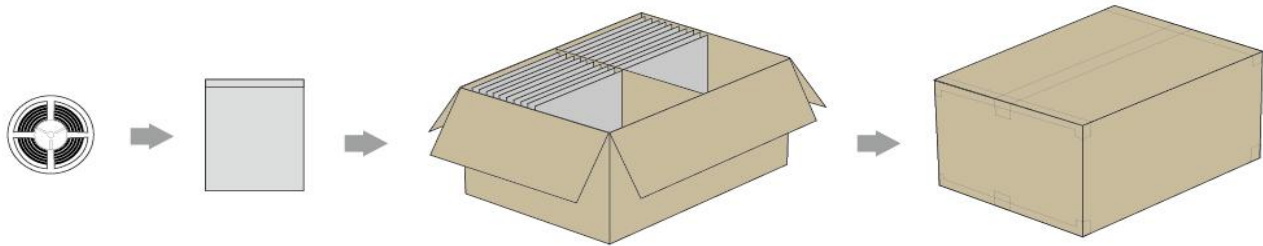
## Circuit Diagram



## Optional Accessories

IP Grade	Category	Description	Picture	Part No.	Application
<b>B 20</b>	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2B-PWP2O-12-0-18	≤240LEDs/M
	Strip to strip Connector	2PIN Strip to strip Connector		WW-F2B-POP2O-12-00	≤240LEDs/M
<b>S 54</b>	/	/	/	/	/
	/	/	/	/	/

**Packaging Diagram**



**Packaging information**











IP Grade	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton volume
		Size	Reel/ctn	Size	Reel/ctn			
<b>B 20</b>	250*270*0.14mm	/	/	440*400 *260mm	50	4.73 KG ±10%	9.44 KG ±10%	0.04576 m <sup>3</sup>
	9.84*10.63*0.0056 in	/	/	17.32*15.748 *10.236in	50	10.43 Lbs ±10%	20.81Lbs ±10%	1.616 ft <sup>3</sup>
<b>S 54</b>	250*270*0.14mm	/	/	440*400 *260mm	50	6.35KG ±10%	11.06KG ±10%	0.04576 m <sup>3</sup>
	9.84*10.63*0.0056 in	/	/	17.32*15.748 *10.236in	50	13.99 Lbs ±10%	24.38Lbs ±10%	1.616 ft <sup>3</sup>

















**Remarks :**


- Please contact our sales manager for customized package (color box, blister etc.)





 **Cautions**

IP20	IP54	IP65	IP67	IP68
				
Do not press the surface of LED	Pay attention to high temperature environment	Do not use in strong water waves environment	Resist strong water waves impact	Can apply to underwater do not deeper than 1m
				
Pay attention to damp-proof and dustproof	Do not apply to rainy environment	Can be applied to rainy environment	Do not apply to underwater environment for a long time	No direct sunlight

							
Do not tie a knot	Do not winding	Do not twist	Do not cut when it is working	Recommended the continuous working time do not exceed 12 hours daily	-20°C~+45°C (-4°F~+113°F)	0°C~+60°C (32°F~+140°F)	Operated by professionals
							
Pay attention to the application environment	IP Level will change after cutting	Do not pull and crash	Connected to power supply every 5 meters	Power supply must be connected to ground(GND)	The minimum bending diameter > 60mm	Power supply retain > 20%	Note the positive and negative poles

 For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.

 For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene, xylene, methyl acetoacetate Ethyl acetate etc.),The environment in which includes strong acid and strong base.

 During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

**\*\* If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.**  
**\*\*The right of final interpretation is owned by Dilux.**